

# PFP-18HPVGD-2D

## PRESSURE AND VOLUME PUMP

*This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.*

*Also available in skid version*



## ENGINE SPECIFICATIONS

- Vanguard, model 350000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- Two 2 1/2" (65 mm) delivery outlets with Fire Type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 23.5" (575 mm); Width: 22" (539 mm); Height: 25.5" (625 mm).
- Weight: 189 lbs (86 kg)


## INCLUDED ACCESSORIES

- Pressure gauge
- 16 Amps alternator
- Low oil alert
- 12-V battery

## PERFORMANCE

**370 GPM @ 25 PSI**  
**250 GPM @ 50 PSI**  
**150 GPM @ 75 PSI**

**90 GPM @ 100 PSI**  
**15 GPM @ 125 PSI**

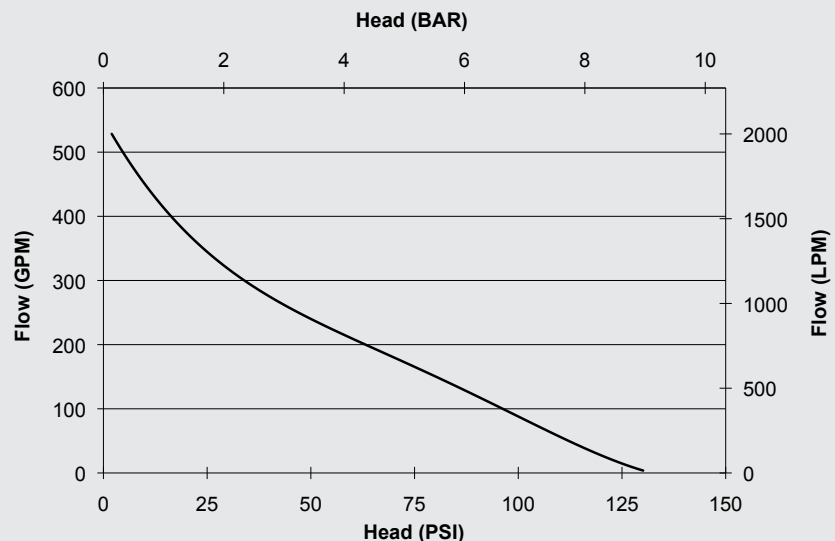

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)