

PFP-23HPVGD-2D-CE

VANGUARD POWERED HIGH VOLUME PUMP

*This pump is the ideal tool to fill your fire truck,
supply your pump truck or carry water over a long
distance.*

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 380000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 2.25 Gallons (8.5 L) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- Two 2 1/2" (65 mm) delivery outlets with Fire Type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 24 3/4" (630 mm)
Width: 26 1/4" (667 mm); Height: 25 3/4" (654 mm)
- Wet weight: 198 lbs (90 kg)


INCLUDED ACCESSORIES

- Full control panel with pressure gauge, vacuum gauge, throttle, choke, starter, panel light and priming valve
- 16 Amps alternator
- Low oil alert
- 12-V battery

PERFORMANCE

MAX FLOW: 650 GPM
MAX PRESSURE: 115 PSI
430 GPM @ 25 PSI

310 GPM @ 50 PSI
110 GPM @ 100 PSI

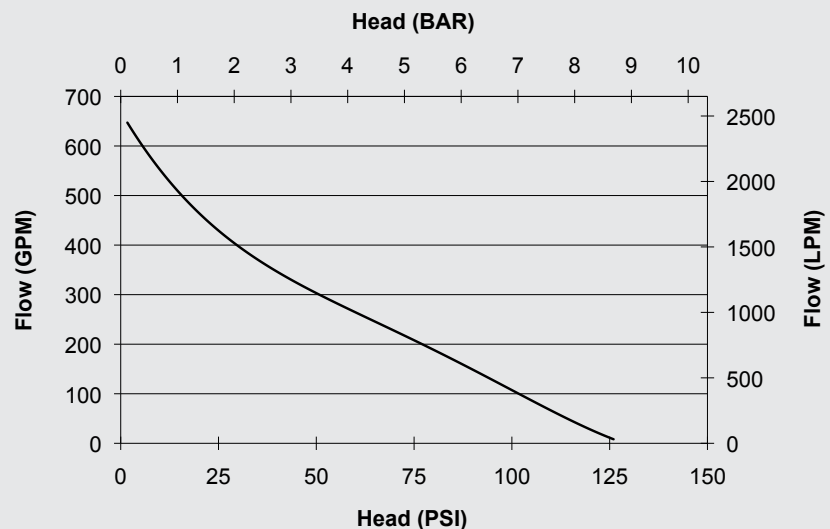

0616

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com