


Catalog N° 220

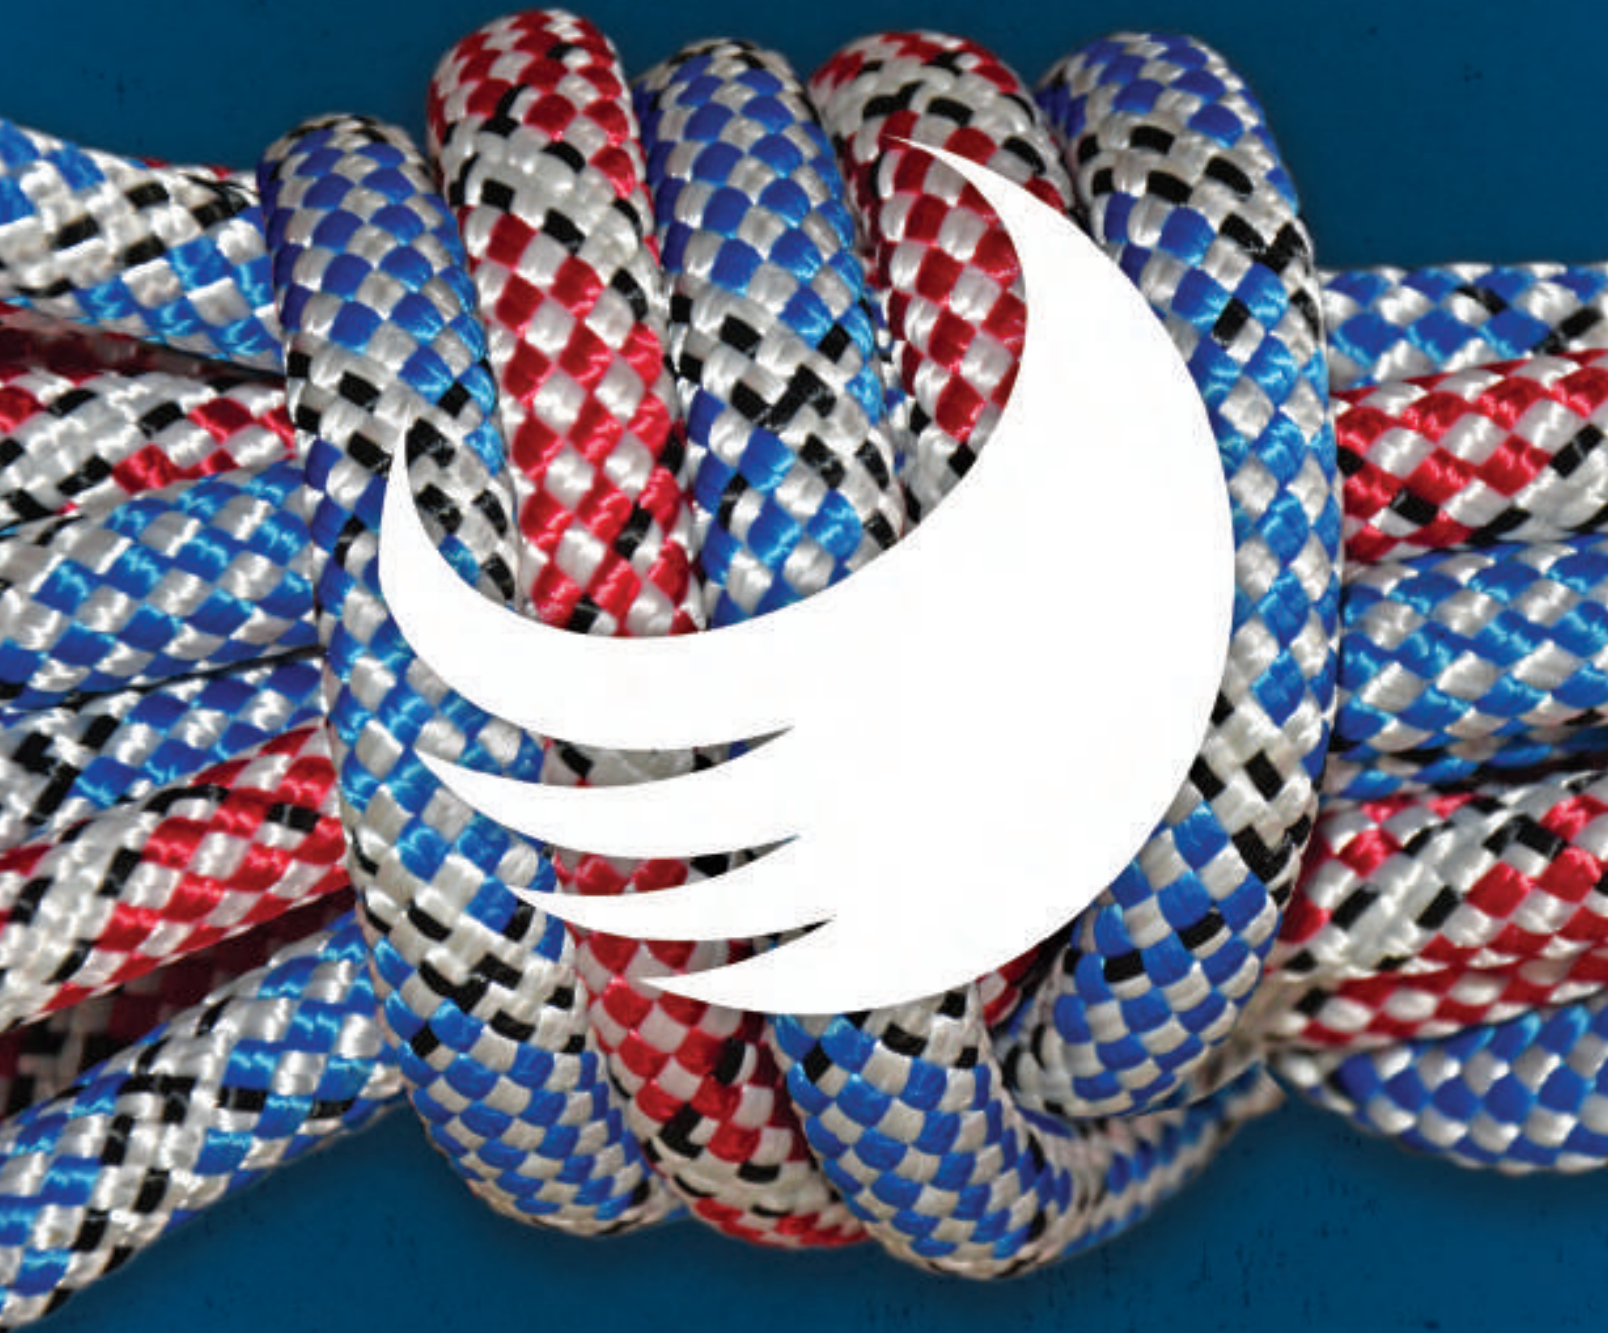

PMI®

Ropes & equipment
for your vertical world

PROFESSIONAL ORGANIZATIONS

Association for Challenge Course Technology (ACCT)

847-325-5860 | www.acctinfo.org

International trade association dedicated to advancement of the challenge course, aerial adventure park, canopy tour, and zip line industry.

American Society of Safety Professionals (ASSP)

847-699-2929 | www.assp.org

Supporting occupational safety and health (OSH) professionals in their efforts to prevent workplace injuries, illnesses and fatalities.

Mountain Rescue Association (MRA)

www.mra.org

Volunteer organization dedicated to saving lives through rescue and safety education.

National Association for Search and Rescue (NASAR)

703-222-6277 | www.nasar.org

Membership organization furthering professional, literary, and scientific knowledge and training in rescue fields.

National Park Service (NPS)

202-208-6843 | www.nps.gov

Federal organization that oversees national parks and what happens in them.

National Safety Council (NSC)

630-285-1121 | www.nsc.org

A membership organization dedicated to protecting life and promoting health.

National Wireless Safety Alliance

703-459-9211 | www.nws-a.org

NWSA provides independent assessments of knowledge and skills and verifiable worker certifications.

Society of Professional Rope Access Technicians (SPRAT®)

www.sprat.org

Resource for information, networking, and support for companies and workers who use on-the-job rope access techniques.

Your safety is our priority!

We're committed to providing accurate information, top-quality products, and educational resources for your safety.

We're so committed to the gear we make and how it's used, we actually invest resources into the standards-writing process and actively participate in ANSI, OSHA, NFPA, ASTM, ISO, and other professional efforts, all with your safety in mind.

If you have a question that isn't answered in this catalog, feel free to give us a call at 706-764-1437.

PMI Quality and Compliance

Where applicable, PMI products are tested in accordance with appropriate national and international standards. In addition, PMI maintains an ISO 9001 Registered Quality program.



Research and Development

Research and development at PMI begins in the field. Just meeting the standards isn't enough. Your gear has to conform to your needs, and it has to be practical and easy to use. In our mission to exceed your expectations, we look to customers and employees who use PMI gear to provide insight and critical analysis for our product development.

You can rely on PMI.



Prices and availability of products shown in this catalog are subject to change or lack of availability without notice.

CONTACT PMI

Toll Free: 1-800-282-ROPE (7673)
Phone: 1-706-764-1437
Fax: 1-800-952-3747
International Fax: 1-706-764-1531
E-mail: custserv@pmirope.com
Mail: PMI Inc. PO Box 803 LaFayette, GA 30728 USA

CONTACT YOUR LOCAL PMI DEALER

To find the PMI Dealer nearest you, call:
North America: 1-800-282-ROPE (7673)
International: 1-706-764-1437
Or on the web at: www.pmirope.com



Dealer and Direct Order Information

- Orders may be placed by phone, fax, or e-mail.
- Customer Service can be reached Monday through Friday from 8:30 am to 5:00 pm ET. If you call outside of these hours, please leave a message.
- When faxing or emailing an order, include a daytime phone number in case we need to contact you.
- Send e-mail orders to custserv@pmirope.com.
- Whether you call, fax, or e-mail us, make sure you indicate quantities, sizes, and color choices. Using our product numbers and descriptions will speed up your order. Date you need the order and if PMI may partial ship as ready.
- We accept purchase orders from governments, organizations, businesses, and schools with approved credit.
- Georgia/Colorado/Washington sales tax is required on all orders picked up or delivered in Georgia, Colorado, or Washington unless you have a Georgia, Colorado, or Washington tax exemption certificate on file with our office. All other applicable taxes are the purchaser's responsibility.

International Orders

- For the fastest service and shipping information, Call: 1-706-764-1437, Fax: 1-706-764-1531 or send e-mail to custserv@pmirope.com. All international orders must be in writing.
- We must have a phone number and payment in advance before shipping your order.
- Payment for products and shipping must be in US Dollars. All international orders are EXWORKS. Wire transfer only for international orders. Contact International Customer Service for information.
- Duty and any other import taxes are not prepaid. You are responsible for duties, taxes, and any brokerage fees. Check with your local customs office for details.

Government Sales

We welcome government bid/quote requests. Send your complete specifications and bid request to: PMI Inc., P.O. Box 803, LaFayette, Georgia, 30728-0803 or fax to 1-800-952-3747. We accept purchase orders from government agencies such as rescue squads, fire departments, police departments, and land managers. Our standard terms of sale apply to all orders unless other arrangements are made in writing.

Shipping Information

- All materials sold F.O.B. Shipping point. Customer assumes all insurance and delivery risks of loss or damage at F.O.B. point as provided in common law.
- If a shipping container is damaged when you receive it, open it and inspect the contents while the carrier is there. Report damage to the carrier by marking the freight bill before you accept or refuse the shipment.
- If the container looked okay but the contents were damaged or items are missing, please contact us. We must be notified of any shipping discrepancies within 15 days of receipt of our package or invoice.
- We ship rush orders via UPS or Fed-Ex.
- Oversized items will be shipped Motor Freight.



Payment Options

- If you don't have an account with PMI, we offer the following alternative methods of payment:
- Prepaid - Cashier's check or money order, payable to Pigeon Mountain Industries.
 - C.O.D. - Cashier's Check or Money Order.
 - Visa, Master Card, or American Express - The minimum charge purchase is \$25.00. Please be sure to include the complete number, your name as it appears on the card, the expiration date, and the phone number and billing address for the card.
 - Sorry, we do not accept personal checks.

High angle rope techniques are inherently dangerous. Please take the time to read and understand this catalog and all instructions that come with the equipment you purchase. The information in this catalog is provided for making purchasing decisions only and is NOT a substitute for competent instruction and training in safety techniques. It is the responsibility of the user of this equipment to obtain competent instruction and to take adequate precautions for safety when using this equipment. The equipment described in this catalog is designed and tested for use in rope access, rescue, confined space, climbing, mountaineering, and caving. Use in any other application is at the discretion of the user.

STANDARDS AND REGULATORY RESOURCES

PMI puts major funding and time into supporting the development of consensus standards for safety in work and rescue.

American National Standards Institute (ANSI)

202-293-8020 | www.ansi.org

Voluntary consensus standards pertaining to work and industry, including fall protection, safety equipment, etc. ANSI is the official USA contact for ISO standards.

ASTM International

610-832-9585 | www.astm.org

Full consensus, voluntary standards on a variety of topics including search and rescue operations and equipment.

Cordage Institute (CI)

610-971-4854 | www.ropecord.com

Cordage standards pertaining to all varieties of rope, including life safety rope.

National Fire Protection Association (NFPA)

617-770-3000 | www.nfpa.org

Industry consensus standards for public and firefighter safety.

Occupational Safety and Health Administration (OSHA)

800-321-OSHA (6742) | www.osha.gov

Federal regulatory agency regulating workplace safety through mandatory regulations. Pertinent regulations include fall protection and confined space.

National Association of Tower Erectors (NATE)

605.882.5865 | www.natehome.com

Trade association providing a unified voice for wireless and broadcast tower erection, maintenance and service companies.

Federal Emergency Management Association (FEMA)

www.fema.gov

Government agency coordinating government-wide relief efforts before, during, and after disasters.

International Commission for Alpine Rescue (ICAR)

www.alpine-rescue.org

Independent, worldwide organization that promotes cooperation and dissemination of information related to mountain rescue.

International Technical Rescue Symposium (ITRS)

706-764-1437 | www.itrsonline.org

This annual symposium is the leading forum for up to date, state-of-the-art, technical rescue information.

PMI limited warranty

PMI products are warranted to the original retail purchaser to be free from defect in material and workmanship for a period of one year. PMI will repair or replace the item without charge, provided inspection at our factory discloses no misuse or alteration which, in our judgment, has affected the condition or functioning of the product.

All implied warranties imposed by law in connection with the sale of PMI products are also limited in duration to a period of one year. PMI expressly excludes and shall not be liable for any consequential damages arising out of any breach of the express or implied warranties on sales of PMI products. Because of the high risks involved in rescue and outdoor activities such as, but not limited to, rope rescue, rope access, caving, rappelling, rock climbing, and mountaineering, no further warranties exist or are implied by PMI. Regulations issued under the Magnuson-Moss Warranty Act require us to include the following statement: some states do not allow limitations on how long an implied warranty lasts nor the excluding or limitation of incidental or consequential damages, so the above limitations may not apply to you.

YOU ARE THE BEST PART OF PMI!

As a manufacturer and distributor of some of the finest ropes and equipment for work and rescue at height, we are driven to provide you with the tools and equipment you need to excel. For more than 40 years PMI has offered a wide range of Made in USA ropes and equipment, as well as global products sourced from around the world, to cover the needs of professionals in work and rescue at height – wherever in the world you are.

At PMI, you'll find all your old favorite ropes (like Hudson Classic Professional Rope, Extreme Pro Unicore, and PMI Pit Rope) along with some of the finest developments in rope technology (like Son of Pit and DuraShield Explorer with Technora). In this catalog, you'll also find

- 11mm & 12.5mm Durashield Technora Sheath Rope
- A New Range of ANSI certified helmets
- A new BRAVO Tactical Harness
- Expanded hardware selections from SMC, ISC, and Climbing Technology
- ...and more!

To help lay a good foundation for your success, in addition to providing the best in equipment choices, PMI is also driven to expand the knowledge base of rope technicians. We believe that knowledge improves safety, and to that end we strive to provide information you can use as you create, analyze, use, and maintain compliance in rope safety and rescue systems. If you haven't already done so, head on over to our website at www.pmirope.com where you will find additional product information, spec sheets, links to webinars and videos, and training opportunities through our training division, Vertical Rescue Solutions.

PMI is your complete source for high value products and knowledge related to Technical Rescue, Rope Access, Tower Safety, Arborists and other work at height professions. Your safety and success is our priority, and we make it our mission to provide prompt, personalized response to your product and technical needs.

Whether you are in need of products, technical information, or resources for your work, please do not hesitate to reach out to any one of PMI's worldwide dealers, or any of our Sales and Customer Service professionals.

*Loui McCurley, CEO
And the Entire PMI Team*



Professional Organizations 2
 Contacts and Order Information 3
 Table of Contents 5

ROPE 7

Static Rope 10
 Unicore® Rope 11
 Low Stretch Rope 18
 Water Rope 19
 Dynamic Rope 21
 Terminations 23
 Rope Care 25

WEBBING AND CORDAGE 33

Cordage 34
 Webbing 38
 Sewn Webbing 39

PERSONAL GEAR 43

Harnesses 44
 Harness Accessories 48
 Lanyards 49
 Helmets 51
 Helmet Accessories 53
 Lights 54
 Water Rescue 55
 Gloves 57
 Radio Harnesses 60
 Belts And Knee Pads 61

HARDWARE 63

Carabiners and Connectors 64
 Rope Grabs and Ascenders 74
 Pulleys 77
 Braking Devices 84
 Terradaptor 93
 Anchorage Connectors 99

SOLUTIONS AND KITS 107

Solutions and kits 108

PATIENT CARE 119

Rigid Litters and Accessories 120
 Wheels And Handles 126
 Flexible Litters and Accessories 128
 Patient Packaging 132

LOGISTICS AND SUPPORT GEAR .. 135

Rope Bags and Storage 136

TRAINING AND EDUCATION 143

VRS™ Courses 144
 Books 147
 Full Index 149

Rope is the foundation of any vertical system. PMI offers a wide range of materials and constructions for every application

Small diameter cordage and webbing, by the spool or in sewn configurations, for all your rigging needs

Harnesses, Helmets, Gloves and more. Optimum comfort and regulatory compliance for professionals

Whether you're looking for Carabiners, Pulleys, Descenders or other hardware, you can rely on PMI for safety and performance

Simple, elegant solutions to equip you with task-specific tools to complete your mission with confidence

Rigid litters, soft litters, litter wheels, and other gear for patient care during technical rescue and evacuation

Rope bags, gear bags, and organizational tools help improve efficiency... which leads to safety

PMI's Vertical Rescue Solutions Training and a solid collection of books and training tools to support the informed Rope Technician

Rope

Webbing and Cordage

Personal Gear

Hardware

Solutions and Kits

Patient Care

Logistics and Support Gear

Training and Education



















ROPE

Creating the High Angle Technician's favorite rope is part science, part art. PMI's 40-plus year reputation for creating the toughest, most abrasion resistant, and most reliable life safety rope comes from a refined blending of technology and passion. Conceived in the field, crafted in our factories, and grounded by research and testing, PMI offers a wide range of ropes, all designed to make your world safer.

PMI Custom Ropes

As America's premier rope company, PMI will make a rope in the length you want in either feet or meters. PMI Ropes are made right here in the USA, and customizing solutions to fit your needs is one of our specialties. Give us a call! Minimum order applies.

UNICORE®, STATIC, LOW STRETCH, SPECIALTY ROPE

Diameter (mm)	Rope Name	Color	MBS kN (lbf)	Weight (g/m)	Sheath/ Core	Compliant	Page
7	PMI® Water Rescue		8 (1798)	34	Nylon/ Polypropylene	N/A	21
7.5	PMI® Element		21 (4721)	44	Technora™/ Technora™	NFPA 1983 (2012), E	10
	PMI® PER		18.4 (4147)	39	Nylon/ Nylon	NFPA 1983 (2017), E	10
8	PMI® Dura-Shield Explorer		27.8	43	Nylon/ Nylon	N/A	10
9	PMI® Hudson Classic Professional		18.3 (4114)	53	Nylon/ Nylon	EN 1891-A CI1801, Static	14
10	PMI® Hudson Classic Professional		27.1 (6092)	66	Nylon/ Nylon	NFPA 1983 (2017), T EN 1891-A CI1801, Static	14
	PMI® Hudson Classic Pro-Max Wear		28.8 (6473)	66	Nylon/ Nylon	NFPA 1983 (2017), T CI1801, Static	17
	PMI® Water Rescue		16 (3597)	62	Nylon/ Polypropylene	N/A	20
10.5	Global Pro by PMI®		27 (6069)	65	Nylon/ Nylon	EN 1891-A CE CI1801, Low Stretch	20
11	PMI® PATRIOT VERTICAL LIFELINE		32.7 (7344)	39	Nylon Sheath/ Nylon Core	NFPA 1983 (2017), T EN 1891-A ANSI Z359.15 (2014)	10
	PMI® Extreme Pro™		39.5 (8888)	90	Polyester/ Nylon	NFPA 1983 (2017), T CI1801, Static ANSI Z359.15, 2014	11
	PMI® Opus		33.3 (7476)	85	Nylon/ Nylon	NFPA 1983 (2017), T CI1801, Static EN 1891-A	12
	PMI® Hudson Classic Professional		32.7 (7344)	80	Nylon/ Nylon	NFPA 1983 (2017), T ANSI Z359.15 EN 1891-A CI1801, Static	15
	PMI® Hudson Classic Pro-Max Wear		33.2 (7456)	80	Nylon/ Nylon	NFPA 1983 (2017), T CI1801, Static	17
	PMI® PIT		31 (6969)	85	Nylon/ Nylon	CI1801, Static	17
	PMI® Dura-shield™ Tech		29.5 (6635)	84.1	Technora®/ Nylon	NFPA 1983 (2017), T CI1801, Low Stretch	19
	PMI® Access Pro		31.1 (7000)	84	Polyester/ Nylon	NFPA 1983 (2017), T CI1801, Low Stretch	19
	Global Pro by PMI®		30 (6740)	73	Nylon/ Nylon	EN 1891-A CE CI1801, Low Stretch	20
	11.5	PMI® Isostatic		32.8 (7388)	96	Polyester/ Polyester	NFPA 1983 (2017), T CI1801, Static

Diameter (mm)	Rope Name	Color	MBS kN (lbf)	Weight (g/m)	Sheath/Core	Compliant	Page
12.5	PMI® Old Glory w/Unicore®		44.5 (10009)	107	Nylon/Nylon	NFPA 1983 (2017), G CI1801, Static ANSI Z359.15, 2014	11
	PMI® Hudson Classic Professional EZ BEND		43.6 (9804)	104	Nylon/Nylon	NFPA 1983 (2017), G CI1801, Static ANSI Z359.15, 2014 EN 1891-A	15
	PMI® Hudson Classic Professional w/Unicore®		44.5 (10009)	107	Nylon/Nylon	NFPA 1983 (2017), G CI1801, Static ANSI Z359.15, 2014	12
	PMI® Classic Retro		43.6 (9804)	104	Nylon/Nylon	NFPA 1983 (2017), G CI1801, Static ANSI Z359.15, 2014	18
	PMI® Dura-shield™ General Use		44.2 (9944)	110.9	Technora®/Nylon	NFPA 1983 (2017), G CI1801, Low Stretch	19
13	PMI® Isostatic		45.9 (10328)	125	Polyester/Polyester	NFPA 1983 (2017), G CI1801, Static	13
16	PMI® Hudson Classic Professional		72.6 (16330)	145	Nylon/Nylon	NFPA 1983 (2017), G CI1801, Static ANSI Z359.15, 2014	16

DYNAMIC ROPE

Diameter (mm)	Rope Name	Color	Falls	Weight (g/m)	Sheath/Core	UIAA Classification	Compliant UIAA	Page
8.1	Verglas		8	42.1	Nylon/Nylon	Half Twin	EN 892	21
			18					
8.9	Erratic w/Unicore		7	55	Nylon/Nylon	Single Half Twin	EN 892	21
			31					
			45					
9.4	Elite		7	57.4	Nylon/Nylon	Single	EN 892	21
9.9	Synergy		7	62.6	Nylon/Nylon	Single	EN 892	21
10.2	Spire		11	69	Nylon/Nylon	Single	EN 892	22
10.6	PMI® Gym Pro		8	69	Nylon/Nylon	Single	EN 892	22
	Cirque		12	71	Nylon/Nylon	Single	EN 892	22
11	Latitude		16	81	Nylon/Nylon	Single	EN 892	22

STATIC ROPE

In the United States, STATIC Rope is differentiated from LOW-STRETCH. Cordage Institute Life Safety Rope standards classify a rope having less than 6% elongation at 10% of its minimum breaking strength (MBS) as STATIC. Static ropes are useful for highlines, ascending/descending, and maintaining load stability. There are no equivalent designations for Static Rope in European (EN) standards.



PMI® ELEMENT 7.5 MM MADE IN THE USA

When working in fire and extreme heat conditions, the new PMI® PER Element with Technora™ is the perfect rope. It is an excellent companion for the PMI® PED escape descender. Features a blue polyester heat indicator, and a 32 carrier braid for the perfect grip. Technora™ decomposes at 930 deg (500 °C).



Key Features:

- NFPA
- 32 Carrier
- Technora™ sheath and core
- Blue polyester heat indicator
- Custom lengths available
- Technora™ Sheath/ Technora™ Core

1 m (3.3 ft) **Elongation:**2.0% at 1000 lbf
Weight:..... 44 g/m1.5% at 600 lbf
MBS: 21 kN (4721 lbf)1.0% at 300 lbf



Gold/Blue
 RR075TGFEET \$2.26 Cut-to-Order (ft)
 RR075TG001 \$7.40 Cut-to-Order (m)

COMPLIANT | NFPA 1983 (2012), E

PMI® PER 7.5 MM MADE IN THE USA

Firefighters and rescuers who need to “bail out” of deadly situations rely on PER. Compact and lightweight, this line is more than strong enough for the job. It also features an energy-absorbing core to reduce the inevitable shock load during first loading.



Key Features:

- NFPA 1983
 - UL
 - Energy absorbing core
 - Nylon Sheath /Nylon Core
- 1 m (3.3 ft)** **Elongation:** 16.0% at 1000 lbf
Weight:..... 39 g/m12.2% at 600 lbf
MBS: 18.4 kN (4147 lbf)6.8% at 300 lbf



Yellow
 RR075YLFEET \$0.94 Cut-to-Order (ft)
 RR075YLO01 \$3.10 Cut-to-Order (m)
 RR075YLO30 \$91.10 30 m (100 ft)
 RR075YLO46 \$136.70 46 m (150 ft)
 RR075YLO61 \$182.30 61 m (200 ft)
 RR075YLO92 \$273.50 92 m (300 ft)

COMPLIANT | NFPA 1983 (2017), E

PMI® DURA-SHIELD EXPLORER ROPE 8 MM MADE IN THE USA

PMI's 8mm expedition rope is ideal for everything from caving to canyoneering and any other adventure that you can conceive! It is a lightweight, abrasion resistant static rope that repels water and handles great while ascending and descending the most challenging routes.

Key Features:

- Technora/polyester sheath
- Dyneema/polypropylene – plus staple polyester
- 32 Carrier Sheath

MBS:27.8 kN **Elongation:** 3.5% at 10 MBS



Green/Blue
 SR080GR001 \$6.25 Cut-to-Order (m)

PMI® PATRIOT VERTICAL

LIFELINE 11 MM MADE IN THE USA

Featuring PMI's signature 16-carrier sheath, this rope features a bright white base with a fun, brightly colored tracer pattern for high visibility against any surface. A great looking and performing rope at a very competitive price created by the Rope Guru's at PMI.



Key Features:

- High visibility white base
- Bold Color Differentiation
- Competitively priced
- Durable 16-Carrier sheath
- Nylon Sheath/Nylon Core

1 m (3.3 ft) **Elongation:**5.8% at 1000 lbf
Weight:..... 39 g/m3.0% at 600 lbf
MBS: 32.7 kN (7344 lbf)1.6% at 300 lbf



Fleck Blue
 RR110FBFEETE \$0.99
 RR110FB001E \$3.25
 RR110FB030E \$95.50
 RR110FB046E \$143.30
 RR110FB061E \$191.10
 RR110FB100E \$313.60
 RR110FB200E \$627.20



Best Seller
 Fleck Red/Black
 RR110FZFEETE \$0.99 Cut-to-Order (ft)
 RR110FZ001E \$3.25 Cut-to-Order (m)
 RR110FZ046E \$143.30 46 m (150 ft)
 RR110FZ061E \$191.10 61 m (200 ft)
 RR110FZ100E \$313.60 100 m (328 ft)
 RR110FZ200E \$627.20 200 m (656 ft)

COMPLIANT | NFPA 1983 (2017), T | EN 1891-A | ANSI Z359.15 (2014)

PMI® EXTREME PRO™

An incredible new PMI rope, Extreme Pro with Unicore® technology is the ultimate polyester kernmantle rope. Unicore® technology creates the ultimate bond between sheath and core. This bond ensures sheath slippage is nearly zero, even when the sheath is entirely cut circumferentially. Typically when such sheath damage occurs, the sheath bunches below the damaged area entrapping the rope technician either above or below the damage site. This rope allows the technician to pass either a cut or torn sheath area, whether descending or ascending, since the sheath cannot bunch to create an impasse.

- | | | |
|----------------------------|---------------------|------------------------|
| CONFINED SPACE | FIRE RESCUE | TOWER WORK |
| UTILITIES SAFETY | ROPE RESCUE | CAVE RESCUE |
| RECREATIONAL CAVING | ROPE ACCESS | ARBORIST |
| WILDERNESS RESCUE | ROPES COURSE | FALL PROTECTION |

Key Features:

- Unicore® technology
- Nearly zero sheath slippage
- Sheath - 100% Polyester
- Core - 100% Nylon 6.6

11 MM (7/16")

Weight: 90.0 g/m	Elongation:1.3% at 300 lbf
MBS: 39.5 kN (8888 lbf)3.0% at 600 lbf
Elongation at 10% MBS:4.7%5.4% at 1000 lbf
8.1% at 1800 lbf


Best Seller

Green/white/orange	
PR110E1FEETUC	\$1.13
PR110E1001UC	\$3.71
PR110E1061UC	\$218.10
PR110E1092UC	\$327.40
PR110E1183UC	\$654.80


Best Seller

Coyote/white/orange		
PR110E2FEETUC	\$1.13	Cut-to-Order (ft)
PR110E2001UC	\$3.71	Cut-to-Order (m)
PR110E2061UC	\$218.10	61 m (200 ft)
PR110E2092UC	\$327.40	92 m (300 ft)
PR110E2183UC	\$654.80	183 m (600 ft)



Blue/white/black	
PR110E3061UC	\$218.10
PR110E3092UC	\$327.40
PR110E3183UC	\$654.80



Red/white/black		
PR110E4061UC	\$218.10	61 m (200 ft)
PR110E4092UC	\$327.40	92 m (300 ft)
PR110E4183UC	\$654.80	183 m (600 ft)

COMPLIANT NFPA 1983 (2017), T CI1801, STATIC ANSI

PMI® OLD GLORY WITH UNICORE®

12.5 MM

Show your colors with PMI's Old Glory. Made in the USA (of course) and certified to NFPA 1983-2017, this 12.5 mm rope is built for rescue. Unicore® technology creates the ultimate bond between sheath and core. This bond ensures sheath slippage is nearly zero, even when the sheath is entirely cut circumferentially. This rope allows the firefighter or rope technician to pass either a cut or torn sheath area, whether descending or ascending, since the sheath cannot bunch to create an impasse.

- | | | |
|-------------------------|--------------------|--------------------------|
| CONFINED SPACE | FIRE RESCUE | TOWER WORK |
| UTILITIES SAFETY | ROPE RESCUE | WILDERNESS RESCUE |
| ROPES COURSE | ROPE ACCESS | |

Key Features:

- Unicore® technology
- Nearly zero sheath slippage
- NFPA Certified
- 16-carrier construction
- CI 1801 Certified
- Torsionally balanced, continuous filament nylon

Weight: 104 g/m	Elongation:0.7% at 300 lbf
MBS: 44.5 kN (10009 lbf)1.6% at 600 lbf
3.5% at 1000 lbf
6.3% at 1800 lbf
	Elongation at 10% MBS:3.7%



Best Seller

Old Glory		
RR125USFEETUC	\$1.50	Cut-to-Order (ft)
RR125US001UC	\$4.95	Cut-to-Order (m)
RR125US046UC	\$218.30	46 m (150 ft)
RR125US061UC	\$291.00	61 m (200 ft)
RR125US092UC	\$436.80	92 m (300 ft)
RR125US183UC	\$873.60	183 m (600 ft)

COMPLIANT | NFPA 1983 (2017), G CI1801, STATIC ANSI Z359.15, 2014

UNICORE. PMI TECHNOLOGY FOR YOUR SECURITY

PMI's Unicore® process brings an undeniable gain in security during delicate and dangerous operations; its advantages are many.



It allows escape if the sheath has been cut



It allows temporary cutting of rope length with a knife, without melting the ends, without fraying of the sheath



It prevents sheath slippage



It reduces shrinkage in water by more than 50%

PMI® OPUS 11 MM **MADE IN THE USA**

A high-performance workhorse designed for the professional rope access technician. Ideal for use with bollard-type descent devices like the ISC D4, this 100% nylon static rope has a 40 carrier sheath with an excellent hand, as well as great knotability and abrasion resistance.

- FIRE RESCUE
- TOWER WORK
- FALL PROTECTION
- ROPE RESCUE
- ARBORIST
- WILDERNESS RESCUE
- CONFINED SPACE
- UTILITIES SAFETY
- ROPE ACCESS
- ROPES COURSE

Key Features:

- Optimized for Rope Access
- Excels in abrasive environments
- Works well with a variety of devices

Weight:..... 85 g/m **Elongation:**6.0% at 1000 lbf
MBS: 33.3kN (7476 lbf) 3.4% at 600 lbf
 1.4% at 300 lbf

Blue w/Red/Yellow	Yellow w/Blue/Red		
KR110BLFEETES \$1.34	KR110YLFEEETES \$1.34	Cut-to-Order (ft)	
KR110BL001ES \$4.40	KR110YL001ES \$4.40	Cut-to-Order (m)	
KR110BL200ES \$849.10	KR110YL200ES \$849.10	200m (656 ft)	

Red w/Yellow/Blue		
KR110RDFEETES \$1.34	Cut-to-Order (ft)	
KR110RD001ES \$4.40	Cut-to-Order (m)	
KR110RD200ES \$849.10	200m (656 ft)	

COMPLIANT | NFPA 1983 (2017), T C11801, STATIC EN 1891-A

12.5 MM EZ BEND™ PMI® **HUDSON CLASSIC PROFESSIONAL ROPE WITH UNICORE®** **MADE IN THE USA**

An incredible new PMI rope for Fire/Rescue professionals, the Classic Pro with Unicore® technology is now available in a 12.5mm (1/2”) diameter! Unicore® technology creates the ultimate bond between sheath and core. This bond ensures sheath slippage is nearly zero, even when the sheath is entirely cut circumferentially. This rope allows the firefighter or rope technician to pass either a cut or torn sheath area, whether descending or ascending, since the sheath cannot bunch to create an impasse.

- CONFINED SPACE
- FIRE RESCUE
- TOWER WORK
- UTILITIES SAFETY
- ROPE RESCUE
- FALL PROTECTION
- ROPES COURSE
- ROPE ACCESS
- WILDERNESS RESCUE

Key Features:

- Unicore® technology
- Nearly zero sheath slippage
- NFPA Certified
- 16-carrier construction
- CI 1801 Certified
- Torsionally balanced, continuous filament nylon

Weight:..... 107 g/m **Elongation:**0.7% at 300 lbf
MBS: 44.5 kN (10009 lbf) 1.6% at 600 lbf
3.5% at 1000 lbf
6.3% at 1800 lbf
Elongation at 10% MBS:3.0–4.4%

Blue/White/Orange	Orange/White/Blue		
RR125BWFEETUC \$1.50	RR125OWFEETUC \$1.50	Cut-to-Order (ft)	
RR125BW001UC \$4.95	RR125OW001UC \$4.95	Cut-to-Order (m)	
RR125BW046UC \$218.30	RR125OW046UC \$218.30	46 m (150 ft)	
RR125BW061UC \$291.00	RR125OW061UC \$291.00	61 m (200 ft)	
RR125BW092UC \$436.80	RR125OW092UC \$436.80	92 m (300 ft)	
RR125BW183UC \$873.60	RR125OW183UC \$873.60	183 m (600 ft)	

This rope can be sewn. This rope can be swaged

COMPLIANT | NFPA 1983 (2017), G | EN 1891-A | ANSI Z359.15 (2014)

PMI® ISOSTATIC MADE IN THE USA

A PMI signature rope constructed of 100% polyester core and sheath. These ropes are specifically designed with super low elongation for specialty applications such as highlines and applications where professional rope technicians require absolute minimal elongation. These ropes are also engineered to stay rounder and have less sheath slippage than conventional kernmantle polyester ropes.



Key Features:

- NFPA Certified
- 32 carrier construction
- 100% polyester construction
- Resists flattening under load

11.5 MM

1 m (3.3 ft)		Elongation:2.2% at 1000 lbf
Weight: 96 g/m	1.6% at 600 lbf
MBS: 32.8 kN (7388 lbf)	1.0% at 300 lbf
		1.4–2.2% at 10 MBS



Orange/Black/Green		
PR1100G061PP	\$194.40	61 m (200 ft)
PR1100G092PP	\$291.70	92 m (300 ft)
PR1100G183PP	\$583.50	183 m (600 ft)
PR1100G200PP	\$638.00	200m (656 ft)

This rope can be sewn

COMPLIANT | NFPA 1983 (2012), T

13 MM



Blue/White/Green		Orange/White/Green	
PR130BGFEETPP	\$1.19	PR1300GFEETPP	\$1.18
PR130BG001PP	\$3.89	PR1300G001PP	\$3.89
PR130BG030PP	\$114.40	PR1300G030PP	\$114.40
PR130BG046PP	\$171.70	PR1300G046PP	\$171.70
PR130BG061PP	\$228.90	PR1300G061PP	\$228.90
PR130BG092PP	\$343.50	PR1300G092PP	\$343.50
PR130BG183PP	\$687.10	PR1300G183PP	\$687.10
PR130BG200PP	\$751.30	PR1300G200PP	\$751.30
			Cut-to-Order (ft)
			Cut-to-Order (m)
			30 m (100 ft)
			46 m (150 ft)
			61 m (200 ft)
			92 m (300 ft)
			183 m (600 ft)
			200m (656 ft)

This rope can be sewn

COMPLIANT | NFPA 1983 (2012), G

TECHNORA

Technora® is a type of aramid fiber, offering heat resistance about twice that of nylon or polyester. Care must still be taken when using aramids in a high temperature environment, as they are not completely impervious to heat. They do not “melt” like other fibers, but they do decompose at a temperature of around 932°F (500°C). The high temperature working limit is much less, about 350°F (176.7°C).

NYLON

Nylon used in ropes is generally either Type 6 or Type 6,6. Both these fiber types have similar characteristics, but the Type 6,6 used by PMI has a higher melting point and greater toughness than Type 6. That’s why PMI Classic ropes are more durable than most competitor products. Nylon is slightly stronger than polyester (7.8–10.4 gpd as compared with 7.0–9.5) and has excellent force absorption characteristics

POLYESTER

Polyester can be an excellent choice for rope, especially where super-low elongation performance is desired. This can include highlines, raising operations, and even some rope access jobs. Low-elongation means less forgiveness in the event of an impact load, however. Polyester is sometimes marketed as being resistant to acids – but in truth any fiber rope should be discarded if it has been exposed to strong chemicals, whether acid or alkali.



PMI® HUDSON CLASSIC

PROFESSIONAL **MADE IN THE USA**

PMI's Classic Escape line is carefully designed to provide the maximum abrasion resistance and provide the desired hand for the intended applications. If you need a rope that has a good strength to weight ratio, PMI® 9 mm will hold up to the test, making it the perfect Personal Escape line.

- GLOBAL
- FIRE RESCUE
- CAVE RESCUE
- CONFINED SPACE
- ROPE RESCUE
- ARBORIST
- ROPE ACCESS
- FALL PROTECTION
- TOWER WORK
- WILDERNESS RESCUE
- UTILITIES SAFETY
- ROPES COURSE

Key Features:

- NFPA Certified
- 16 carrier construction
- CI 1801
- Third party certified by UL (Underwriters Laboratories)
- Torsionally balanced, continuous filament nylon
- Available in many colors
- Also available in custom colors & lengths
- EZ-Bend construction

9 MM

1 m (3.3 ft)
Weight:..... 53 g/m
MBS: 18.3 kN (4114 lbf)
Knotability: 0.6
Sheath Content: 49.0%

Elongation:7.6% at 1000 lbf
5.4% at 600 lbf
3.7% at 300 lbf

Elongation at 10% MBS:.....4.3%

Orange/Black	White/Black
RR0900BFEEETE \$0.91	RR090WBFEEETE \$0.76
RR0900B001E \$2.99	RR090WB001E \$2.50
RR0900B030E \$87.90	RR090WB030E \$73.50
RR0900B046E \$131.80	RR090WB046E \$110.40
RR0900B061E \$175.80	RR090WB061E \$147.10
RR0900B092E \$263.80	RR090WB092E \$220.80
RR0900B183E \$527.70	RR090WB183E \$441.70
RR0900B200E \$577.00	RR090WB200E \$483.00
	Cut-to-Order (ft)
	Cut-to-Order (m)
	30 m (100 ft)
	46 m (150 ft)
	61 m (200 ft)
	92 m (300 ft)
	183 m (600 ft)
	200m (656 ft)

This rope can be sewn

10 MM

Preferred by experienced professionals, PMI® 10 mm is the ultimate choice for single person rope work.

1 m (3.3 ft)
Weight:..... 66 g/m
MBS: 27.1kN (6092 lbf)
Knotability: 1.0
Shrinkage:2.8%
Sheath Content: 42.8%

Elongation:6.4% at 1000 lbf
4.0% at 600 lbf
1.9% at 300 lbf

Elongation at 10% MBS:4.4–4.6%

Black	Blue/White
RR100BKFEETE \$1.01	RR100WFEETE \$1.09
RR100BK001E \$3.31	RR100W001E \$3.31
RR100BK030E \$97.30	RR100W030E \$97.30
RR100BK046E \$146.00	RR100W046E \$146.00
RR100BK061E \$194.60	RR100W061E \$194.60
RR100BK092E \$292.10	RR100W092E \$292.10
RR100BK183E \$584.20	RR100W183E \$584.20
RR100BK200E \$638.70	RR100W200E \$638.70
	Cut-to-Order (ft)
	Cut-to-Order (m)
	30 m (100 ft)
	46 m (150 ft)
	61 m (200 ft)
	92 m (300 ft)
	183 m (600 ft)
	200m (656 ft)

Orange/White	OD Green
RR100OW001E \$1.01	RR100DFEETE \$1.01
RR100OWFEETE \$3.31	RR100D001E** \$3.31
RR100OW030E \$97.30	RR100D030E** \$97.30
RR100OW046E \$146.00	RR100D046E** \$146.00
RR100OW061E \$194.60	RR100D061E** \$194.60
RR100OW092E \$292.10	RR100D092E** \$292.10
RR100OW183E \$584.20	RR100D183E** \$584.20
RR100OW200E \$638.70	
	Cut-to-Order (ft)
	Cut-to-Order (m)
	30 m (100 ft)
	46 m (150 ft)
	61 m (200 ft)
	92 m (300 ft)
	183 m (600 ft)
	200m (656 ft)

Red/White	White/Orange
RR100RWFEETE \$1.01	RR100WFEETE \$1.01
RR100RW001E \$3.31	RR100W001E \$3.31
RR100RW030E \$97.30	RR100W030E \$97.30
RR100RW046E \$146.00	RR100W046E \$146.00
RR100RW061E \$194.60	RR100W061E \$194.60
RR100RW092E \$292.10	RR100W092E \$292.10
RR100RW183E \$584.20	RR100W183E \$584.20
RR100RW200E \$638.70	RR100W200E \$638.70
	Cut-to-Order (ft)
	Cut-to-Order (m)
	30 m (100 ft)
	46 m (150 ft)
	61 m (200 ft)
	92 m (300 ft)
	183 m (600 ft)
	200m (656 ft)

This rope can be sewn

COMPLIANT | NFPA 1983 (2012), T | EN 1891-A

11 MM

The "time tested" burly sheath design of PMI's 11 mm Classic Static makes it a world favorite for professionals who must routinely subject their ropes to high abrasion applications. No other 11 mm rope will outlast a PMI® Classic in side by side, real world applications except a PMI® Max-Wear rope.

1 m (3.3 ft)	Elongation:8.8% at 1800 lbf
Weight: 80 g/m5.8% at 1000 lbf
MBS: 32.7 kN (7344 lbf)3.0% at 600 lbf
Knotability: 0.91.6% at 300 lbf
Shrinkage:3.2%	Elongation at 10% MBS: 3.4–4.4%
Sheath Content: 50.4%	



Blue/Black	Black
RR110BBFEETE \$1.21	RR110BKFEETE \$1.21
RR110BB001E \$4.00	RR110BK001E \$4.00
RR110BB030E \$117.60	RR110BK030E \$117.60
RR110BB046E \$176.40	RR110BK046E \$176.40
RR110BB061E \$235.20	RR110BK061E \$235.20
RR110BB092E \$352.90	RR110BK092E \$352.90
RR110BB183E \$705.90	RR110BK183E \$705.90
RR110BB200E \$771.90	RR110BK200E \$771.90



Blue	Orange/Black
RR110BLFEETE \$1.21	RR110OBFEETE \$1.21
RR110BL001E \$4.00	RR110OB001E \$4.00
RR110BL030E \$117.60	RR110OB030E \$117.60
RR110BL046E \$176.40	RR110OB046E \$176.40
RR110BL061E \$235.20	RR110OB061E \$235.20
RR110BL092E \$352.90	RR110OB092E \$352.90
RR110BL183E \$705.90	RR110OB183E \$705.90
RR110BL200E \$771.90	RR110OB200E \$771.90



Red/Black	Red
RR110RBFEETE \$1.21	RR110RDFEETE \$1.21
RR110RB001E \$4.00	RR110RD001E \$4.00
RR110RB030E \$117.60	RR110RD030E \$117.60
RR110RB046E \$176.40	RR110RD046E \$176.40
RR110RB061E \$235.20	RR110RD061E \$235.20
RR110RB092E \$352.90	RR110RD092E \$352.90
RR110RB183E \$705.90	RR110RD183E \$705.90
RR110RB200E \$771.90	RR110RD200E \$771.90



White/Black	Arc Yellow/Black
RR110WBFEETE \$1.01	RR110YBFEETE \$1.21
RR110WB001E \$4.00	RR110YB001E \$4.00
RR110WB030E \$97.30	RR110YB030E \$117.60
RR110WB046E \$146.00	RR110YB046E \$176.40
RR110WB061E \$194.60	RR110YB061E \$235.20
RR110WB092E \$292.10	RR110YB092E \$352.90
RR110WB183E \$705.90	RR110YB183E \$705.90
RR110WB200E \$771.90	RR110YB200E \$771.90
RR110WB366E \$1168.10	

This rope can be swaged. This rope can be sewn

EZ BEND 12.5 MM

PMI® 12.5 mm is the classic 6,6 nylon line for any rugged or harsh environment. High abrasion resistance makes this the toughest rope for any professional.

1 m (3.3 ft)	Elongation:6.9% at 1800 lbf
Weight: 104 g/m3.9% at 1000 lbf
MBS: 43.6 kN (9804 lbf)2.0% at 600 lbf
Knotability: 1.40.8% at 300 lbf
Shrinkage:2.7%	Elongation at 10% MBS: 3.6–4.2%
Sheath Content: 41.0%	



Black	Blue
RR125BKFEETE \$1.39	RR125BLFEETE \$1.39
RR125BK001E \$4.59	RR125BL001E \$4.59
RR125BK030E \$134.90	RR125BL030E \$134.90
RR125BK046E \$202.40	RR125BL046E \$202.40
RR125BK061E \$269.90	RR125BL061E \$269.90
RR125BK092E \$405.00	RR125BL092E \$405.00
RR125BK183E \$810.10	RR125BL183E \$810.10
RR125BK200E \$885.80	RR125BL200E \$885.80



Blue/White	OD Green
RR125BWFEEETE \$1.39	RR125ODFEETE \$1.39
RR125BW001E \$4.59	RR125OD001E \$4.59
RR125BW030E \$134.90	RR125OD030E \$134.90
RR125BW046E \$202.40	RR125OD046E \$202.40
RR125BW061E \$269.90	RR125OD061E \$269.90
RR125BW092E \$405.00	RR125OD092E \$405.00
RR125BW183E \$810.10	RR125OD183E \$810.10
RR125BW200E \$885.80	RR125OD200E \$885.80
RR125BW366E \$1619.80	



Orange/White	Red
RR125OWFEETE \$1.39	RR125RDFEETE \$1.39
RR125OW001E \$4.59	RR125RD001E \$4.59
RR125OW030E \$134.90	RR125RD030E \$134.90
RR125OW046E \$202.40	RR125RD046E \$202.40
RR125OW061E \$269.90	RR125RD061E \$269.90
RR125OW092E \$405.00	RR125RD092E \$405.00
RR125OW183E \$810.10	RR125RD183E \$810.10
RR125OW200E \$885.80	RR125RD200E \$885.80
RR125OW366E \$1619.80	RR125RD366E \$1619.80



Red/White	White/Orange
RR125RWFEETE \$1.39	RR125WOFEEETE \$1.19
RR125RW001E \$4.59	RR125WO001E \$3.91
RR125RW030E \$134.90	RR125WO030E \$114.90
RR125RW046E \$202.40	RR125WO046E \$172.40
RR125RW061E \$269.90	RR125WO061E \$229.90
RR125RW092E \$405.00	RR125WO092E \$345.00
RR125RW183E \$810.10	RR125W0183E \$690.10
RR125RW200E \$885.80	RR125W0200E \$754.50
RR125RW366E \$1619.80	RR125W0366E \$1379.80



Yellow/White	Cut-to-Order (ft)	<i>This rope can be sewn.</i>
RR125YWFEEETE \$1.39	Cut-to-Order (m)	<i>This rope can be swaged</i>
RR125YW001E \$4.59	30 m (100 ft)	
RR125YW030E \$134.90	46 m (150 ft)	
RR125YW046E \$202.40	61 m (200 ft)	
RR125YW061E \$269.90	92 m (300 ft)	
RR125YW092E \$405.00	183 m (600 ft)	
RR125YW183E \$810.10	200m (656 ft)	
RR125YW200E \$885.80	366 m (1200 ft)	
RR125YW366E \$1619.80		

COMPLIANT | NFPA 1983
(2017), G | EN 1891-A
ANSI Z359.15 (2014)

16 MM EZ BEND™ PMI® HUDSON CLASSIC PROFESSIONAL ROPE



An extra heavy duty work horse that is easy to grip, the 16 mm EZ Bend™ PMI® Hudson Classic Professional Rope can take on any job. PMI's classic EZ-Bend 16 carrier construction combined with the toughest nylon on the market makes PMI ropes some of the toughest in the world. PMI ropes will always beat 32, 40, and 48 carrier designs made with lesser quality nylons hands down in abrasion and real-world durability tests.

Key Features:

- NFPA Certified
- 16 carrier construction
- CI 1801
- Third party certified by UL (Underwriters Laboratories)
- Torsionally balanced, continuous filament nylon
- Available in many colors
- Also available in custom colors & lengths

Weight: 145.0 g/m	Elongation:0.9% at 300 lbf
MBS: 72.6 kN (16330 lbf) 1.8% at 600 lbf
 2.4% at 1000 lbf
 2.8% at 1800 lbf
	Elongation at 10% MBS: 3.6–4.8%



Blue/White			
RR160BWFEEETE	\$1.73	RR160YWFEEETE	\$1.73
RR160BW001E	\$5.70	RR160YW001E	\$5.70
RR160BW030E	\$167.60	RR160YW030E	\$167.60
RR160BW046E	\$251.40	RR160YW046E	\$251.40
RR160BW061E	\$335.20	RR160YW061E	\$335.00
RR160BW092E	\$503.00	RR160YW092E	\$503.00
RR160BW183E	\$1006.00	RR160YW183E	\$1006.00
RR160BW200E	\$1100.00	RR160YW200E	\$1100.00



White/Orange			
RR160WOFEEETE	\$1.50	Cut-to-Order (ft)	
RR160W0001E	\$4.94	Cut-to-Order (m)	
RR160W0030E	\$145.20	30 m (100 ft)	
RR160W0046E	\$217.90	46 m (150 ft)	
RR160W0061E	\$290.50	61 m (200 ft)	
RR160W0092E	\$435.90	92 m (300 ft)	
RR160W0183E	\$471.90	83 m (600 ft)	
RR160W0200E	\$953.30	200 m (656 ft)	

COMPLIANT | NFPA 1983 (2017), G | ANSI Z359.15 (2014)

ADVANTAGES OF 16-CARRIER SHEATH DESIGN

PMI Classic ropes are unique in that they feature a "16-carrier" sheath design. This means that there are 16 different yarn bundles that go into making the braided sheath of the rope. For any given diameter rope, sheath bundles will be thinner when there are more carriers and thicker when there are fewer carriers.

A general rule of thumb to remember is that the more sheath carriers, the thinner the sheath – resulting in a softer hand (which is nice) but greater susceptibility to wear and tear (which is not so nice.)

While PMI also offers several other braid designs like 32 and 48-carrier, one advantage of PMI's classic 16-carrier sheath design is the dramatic increase it lends to the life and durability of the rope. Sheath braid design is a fine balance between yarn denier, tension, number of carriers, and the amount of yarn used.

PMI® RETRO 12.5 MM

The longest lasting, highest visibility rope you can buy for low light environments. Our special Retro Reflective material stands out like a beacon in the darkest night when a light is shined on it. Choose from Retro Classic, Retro Water Rescue Ropes, or Retro multi-Cord.

- ☠️ **CONFINED SPACE**
- ⚡️ **UTILITIES SAFETY**
- 🧑‍🔧 **ROPE RESCUE**
- 🏠 **ROPE ACCESS**
- 🧗 **ROPE COURSE**
- 🔥 **FIRE RESCUE**
- 🏕️ **WILDERNESS RESCUE**
- 🏠 **RECREATIONAL CAVING**
- 🧗 **CAVE RESCUE**
- 🧑‍🔧 **FALL PROTECTION**

Key Features:

- Classic EZ-Bend
- Retro reflective filaments
- Increases nighttime safety

Weight: 104 g/m	Elongation:3.9% at 1000 lbf
MBS: 43.6 kN (9804 lbf)2.0% at 600 lbf
Knotability: 1.40.8% at 300 lbf
Shrinkage:2.7%	Elongation at 10% MBS: 3.6–4.2%
Sheath Content: 41.0%	



Yellow/Brown/Retro		
RR125YGFEETE	\$1.81	Cut-to-Order (ft)
RR125YG001EV	\$5.94	Cut-to-Order (m)
RR125YG030EV	\$174.60	30 m (100 ft)
RR125YG046EV	\$262.00	46 m (150 ft)
RR125YG061EV	\$349.30	61 m (200 ft)
RR125YG092EV	\$524.20	92 m (300 ft)
RR125YG183EV	\$1048.40	83 m (600 ft)
RR125YG200EV	\$1146.30	200 m (656 ft)

COMPLIANT | NFPA 1983 (2017), G | ANSI Z359.15 (2014)

NFPA USE CATEGORIES

Equipment that is certified to meet NFPA 1983 (2017) will also bear a letter designator:

- E for Escape Use**
- T for Technical Use**
- G for General Use**

Each of these classifications applies to a broad range of equipment (ropes, harnesses, connectors, etc), and there are different performance requirements associated with each. Check with your AHJ for local requirements.



PMI® HUDSON CLASSIC PROFESSIONAL MAX WEAR



Extreme environments require this extreme rope. Those who work in rugged terrain appreciate the superior abrasion resistance of this sturdy line. Also available in custom colors and lengths. This rope is extremely durable, but it has a much stiffer hand than PMI® Classic. PMI® Max Wear also has only one stripe over the base color while Classic EZ-Bend has two stripes over the base color. Contact PMI customer service for availability, delivery and custom pricing.

- CONFINED SPACE**
- ROPE RESCUE**
- ARBORIST**
- UTILITIES SAFETY**
- ROPE ACCESS**
- WILDERNESS RESCUE**
- ROPES COURSE**
- TOWER WORK**
- RECREATIONAL CAVING**
- FIRE RESCUE**
- CAVE RESCUE**

10 MM

Weight:..... 66.0 g/m
MBS: 28.8 kN (6473 lbf)
Elongation: 2.2% at 300 lbf
 4.4% at 600 lbf
 7.1% at 1000 lbf
Elongation at 10% MBS:4.2–5.4%



White/Orange
 RR100WO200M \$551.90

11 MM

Weight:..... 80.0 g/m
MBS: 33.2 kN (7456 lbf)
Elongation: 1.8% at 300 lbf
 3.6% at 600 lbf
 5.9% at 1000 lbf
Elongation at 10% MBS:4.4–4.6%



White/Black
 RR110WB200M \$638.70 200m (656 ft)

COMPLIANT | NFPA 1983 (2012), G

PMI® PIT ROPE

Considered the Gold Standard of caving ropes by recreational cavers and rescuers alike, PMI Pit Rope is one of the burliest and longest-lasting ropes available today. The Max-Wear sheath is designed to withstand the harshest of cave environments, and makes ascending rope a breeze with its low elongation and compatibility with most, if not all, SRT climbing systems. This iconic rope stands the test of time, and will easily survive trip after trip being dragged through miles of cave passages and/or being rigged in raging waterfalls. While PMI Pit Rope is the original caver's rope, don't be fooled: it is also a perfect tool for anyone that needs an incredibly durable workhorse where abrasion, resistance and reliability are paramount.

- CONFINED SPACE**
- RECREATIONAL CAVING**
- ROPES COURSE**
- CAVE RESCUE**

Weight:..... 85 g/m
MBS: 31 kN (6969 lbf)
Elongation: 7.0% at 1000 lbf
 3.6% at 600 lbf
 1.8% at 300 lbf
Elongation at 10% MBS:..... 4.6%

11 MM



White		
SR110WH030M	\$95.70	30 m (100 ft)
SR110WH046M	\$143.50	46 m (150 ft)
SR110WH061M	\$191.40	61 m (200 ft)
SR110WH092M	\$287.20	92 m (300 ft)
SR110WH183M	\$574.40	183 m (600 ft)
SR110WH200M	\$628.10	200 m (656 ft)
SR110WH366M	\$1148.60	366 m (1200 ft)

This rope can be sewn. This rope can be swaged

9 MM



White		
SR090WH030M	\$72.00	30 m (100 ft)
SR090WH046M	\$108.00	46 m (150 ft)
SR090WH061M	\$144.10	61 m (200 ft)
SR090WH092M	\$216.30	92 m (300 ft)
SR090WH183M	\$432.60	183 m (600 ft)
SR090WH200M	\$473.00	200 m (656 ft)
SR090WH366M	\$865.10	366 m (1200 ft)

This rope can be sewn. This rope can be swaged

GLOBAL PRO BY PMI

Made to exacting PMI standards, these new ropes satisfy the need for a softer hand and a bit more stretch than PMI's current low stretch ropes. Popular in rope access work around the globe, this style of rope meets all applicable standards including CI and CE. PMI is proud to introduce these new Global Pro ropes for work and rescue applications.



Key Features:

- CI, CE and EN Certified
- Low stretch with a soft hand
- Designed for use with bobbin/squeeze type descenders
- Great choice for Rope Access and Fall Arrest applications.

10.5 MM

Weight:.....	65 g/m	Knotability:.....	0.63
MBS:.....	27 kN (6069 lbf)	Sheath Slippage:.....	0.8%
Elongation: 50-150 kg (EN 1891)3.0%	Shrinkage:.....	5.0%
Falls:.....	16	Sheath Content:.....	38.0%



Green	
MR105GRFEET	\$0.77
MR105GR001	\$2.56
MR105GR200	\$465.00



White		
MR105WHFEET	\$0.70	Cut-to-Order (ft)
MR105WH001	\$2.33	Cut-to-Order (m)
MR105WH200	\$423.00	200 m (656 ft)

11 MM

Weight:.....	73 g/m	Knotability:.....	0.74
MBS:.....	30 kN (6740 lbf)	Sheath Slippage:.....	0.8%
Elongation: 50-150 kg (EN 1891)2.8%	Shrinkage:.....	4.0%
Falls:.....	20	Sheath Content:.....	36.0%



Green	
MR110GRFEET	\$0.83
MR110GR001	\$2.72
MR110GR200	\$494.00



White		
MR110WHFEET	\$0.75	Cut-to-Order (ft)
MR110WH001	\$2.48	Cut-to-Order (m)
MR110WH200	\$451.00	200 m (656 ft)

COMPLIANT CE CI 1801, LOW STRETCH EN 1891-A

PMI® RETRO-REFLECTIVE WATER RESCUE ROPE

PMI's Retro-Reflective Water Rescue Rope includes all the features of the PMI Water Rescue Rope with added reflection capability for nighttime use. The continuous stranded polypropylene core provides flotation to the wear – resistant braided nylon sheath. This rope has a higher breaking strength than economy polypropylene water rescue rope, and is much easier to grip.

Key Features:

- Continuous polypropylene core
- Lightweight
- Nylon sheath
- Reflective

10 MM

Weight:..... 62 g/m MBS: 16 kN (3597 lbf)



Special Order

Yellow/Blue/Retro		
WR100YXFEETEY	\$1.32	Cut-to-Order (ft)
WR100YX001EV	\$4.35	Cut-to-Order (m)
WR100YX183EV	\$767.70	183 m (600 ft)
WR100YX200EV	\$839.50	200 m (656 ft)

LOW STRETCH ROPE

USA standards differentiate between LOW-STRETCH and STATIC Rope. According to Cordage Institute Life Safety Rope standards a rope having 6-10% elongation at 10% of its minimum breaking strength (MBS) is classified as LOW-STRETCH. Low-stretch rope is forgiving, offers limited impact resistance, and tends to have a softer hand than static rope. European (EN) standards focus on Low-Stretch rope.



PMI® DURA-SHIELD MADE IN THE USA

A brand new PMI rope, HeatShield™ is an excellent choice for rope access work for anyone needing rope with superior sheath abrasion and heat resistant properties such as those performing work at bridges, dams, towers or industrial sites. If there is a chance your rope may contact a sharp edge, hot pipes, or anything hot nearby, consider this rope for the job. The sheath is 100% Technora® featuring a high tensile strength, good fatigue resistance, heat resistance, excellent dimensional stability, and chemical resistance.

Key Features:

- Sheath - 100% Technora®
- Core - 100% Nylon 6.6
- High modulus of elasticity
- Low creep
- Low thermal shrinkage
- Thermal decomposition threshold 500°C (932°F)
- Can be used for long periods at a temperature of 250°C (482°F)

11 MM TECH

Weight:	84.1 g/m	Elongation:	8.2% at 1000 lbf
MBS:	29.5 kN (6635 lbf)	5.1% at 600 lbf
		2.4% at 300 lbf
		8.6% at 10 MBS



Natural Gold		
HS110TG001A	\$7.25	Cut-to-Order (m)
HS110TG046A	\$319.70	46 m (150 ft)
HS110TG092A	\$639.80	92 m (300 ft)
HS110TG183A	\$1279.60	183 m (600 ft)

12.5 MM GENERAL USE

Weight:	110.9 g/m	Elongation:	7.6% at 1000 lbf
MBS:	44.2 kN (9944 lbf)	5.0% at 600 lbf
		2.5% at 300 lbf
		8.8% at 10 MBS



Natural Gold		
HS125TG001A	\$9.75	Cut-to-Order (m)
HS125TG046A	\$430.00	46 m (150 ft)
HS125TG092A	\$860.40	92 m (300 ft)
HS125TG183A	\$1720.80	183 m (600 ft)

COMPLIANT | NFPA 1983 (2012), G CI 1801, LOW STRETCH

PMI® ACCESS PRO MADE IN THE USA

A PMI rope revolution, the Access Pro is engineered for performance and flexibility. With a polyester sheath and nylon core, this rope is a perfect choice for Rope Access and Fall Protection. In fact, we like Access Pro so much that we've chosen it to feature in our PMI™ Rescue Solutions. For more information - see the Solutions and Kits section.

- | | | |
|-------------------------|--------------------|--------------------------|
| CONFINED SPACE | ROPE RESCUE | FALL PROTECTION |
| UTILITIES SAFETY | ROPE ACCESS | ARBORIST |
| FIRE RESCUE | TOWER WORK | WILDERNESS RESCUE |

Key Features:

- 32 carrier construction
- Polyester sheath
- Nylon core
- A superior hand for Fall Arrest and Rope Access applications

11 MM

MBS:	31.1 kN (7000 lbf)	Elongation: 50–150 kg (EN 1891)
Elongation:	9.4% at 1000 lbf
	6.2% at 600 lbf
	3.0% at 300 lbf	Falls:
		> 14
Weight:	84 g/m	Knotability:
6.8–7.4% at 10 MBS		1.1
		Sheath Slippage:
		1.8%
		Shrinkage:
		1.6%
		Sheath Content:
		49.7%



Special Order

Red/Black		
IR110RB001P	\$3.45	Cut-to-Order (m)
IR110RB030P	\$101.40	30 m (100 ft)
IR110RB046P	\$152.10	46 m (150 ft)
IR110RB061P	\$202.80	61 m (200 ft)
IR110RB092P	\$304.40	92 m (300 ft)
IR110RB183P	\$608.90	183 m (600 ft)
IR110RB200P	\$665.80	200 m (656 ft)

COMPLIANT | NFPA 1983 (2017), T | EN 1891-A | CI1801

ECONOMY THROW ROPE MADE IN THE USA

The perfect throwline rope in water rescue operations where a floating, economical, and lightweight line is needed. With a specific gravity less than 1, polypropylene will float in any water conditions. While great for personal throwline applications, it is not designed for use as rigging gear for technical rope rescue.

Key Features:

- Solid Braid
- 100% polypropylene
- Economical
- Lightweight

8 MM (5/16")

Weight:.....31.0 g/m **MBS:** 5 kN (1124 lbf)



Special Order

Yellow
PR63002FT \$1.32 Cut-to-Order (ft)

10 MM (25/64")

Weight:.....41.0 g/m **MBS:** 10 kN (2248 lbf)



Special Order

Yellow
PR63001FT \$1.32 Cut-to-Order (ft)

10 MM (25/64")

Weight:.....62.0 g/m **MBS:** 16 kN (3597 lbf)



Special Order

Yellow		
PR63001	\$2.79	Cut-to-Order (m)
PR63023S	\$64.17	23 m (75 ft)
PR63030S	\$82.00	30 m (100 ft)
PR63046S	\$123.00	46 m (150 ft)
PR63061S	\$164.00	61 m (200 ft)
PR63092S	\$246.20	92 m (300 ft)
PR63183S	\$492.40	183 m (600 ft)
PR63200S	\$538.40	200 m (656 ft)

PMI® WATER RESCUE

ROPE MADE IN THE USA

Designed at the request of our customers, this rope is intended for use as a bagged throw rope for boat or shore based water rescue. The continuous stranded polypropylene core provides flotation to the wear – resistant braided nylon sheath. This rope has a higher breaking strength than economy polypropylene water rescue rope, and is much easier to grip.

- WATER RESCUE
- WILDERNESS RESCUE
- ROPE RESCUE

FIRE RESCUE

Key Features:

- Continuous polypropylene core
- Nylon sheath
- Lightweight

7 MM

Weight:..... 34 g/m **MBS:** 8 kN (1798 lbf)



Yellow/Blue
WR070YX001E \$2.09 Cut-to-Order (m)

10 MM

Weight:..... 62 g/m **MBS:** 16 kN (3597 lbf)



Best Seller

Yellow/Blue		
WR100YXFEETE	\$0.85	Cut-to-Order (ft)
WR100YX001E	\$2.79	Cut-to-Order (m)
WR100YX023E	\$64.17	23 m (75 ft)
WR100YX030E	\$82.00	30 m (100 ft)
WR100YX046E	\$123.00	46 m (150 ft)
WR100YX061E	\$164.00	61 m (200 ft)
WR100YX092E	\$246.20	92 m (300 ft)
WR100YX183E	\$492.40	183 m (600 ft)
WR100YX200E	\$538.40	200 m (656 ft)

COMPLIANT CE CI 1801, LOW STRETCH EN 1891-A

8.1 MM VERGLAS MADE IN THE USA

With a fall rating of 18 for Twin rope use, you should feel absolute confidence in the VERGLAS when committing to those adventurous routes! Ideal for sport and trad rock routes as well as snow and ice climbs, sometimes two ropes can work to your advantage. This rope is UltraDry™ treated and performs to the highest standard in extreme conditions. It is the best lightweight option when splitting the load for those gear intensive treks and is conveniently available in two discernible colors. This exceptionally versatile rope is rated for both Twin and Half Rope use, giving you the options you want.



Weight: 42.1 g/m	Extension: 35% – Half
Falls: 8 – Half 24% – Twin
..... 18 – Twin	Elongation: 5–80 kg (UIAA)
Impact Force: 5.2 kN – Half 8.9% – Half
..... 8.9 kN – Twin 7.2% – Twin
	Number of Sheath Carriers: .. 32



Caribbean	
DR081LH060D	\$169.80
DR081LH070D	\$198.10



Coral	
DR081LI060D	\$169.00 60m (197 ft)
DR081LI070D	\$198.00 70m (230 ft)

COMPLIANT | UIAA 101 | EN 892

8.9 MM ERRATIC DYNAMIC ROPE WITH UNICORE® MADE IN THE USA



The all new ERRATIC has every feature that you need all wrapped up into one rope for any climbing situation. It is a single rope that is ultra-lightweight with a solid feel and precision control. The ERRATIC utilizes Unicore® technology, resulting in nearly zero sheath slippage, even if the sheath is damaged. This rope is also UltraDry™ treated for those ambitious alpine expeditions and for mixed rock and ice routes. It is also ideal for trad and sport climbing, especially when sending difficult routes where weight, speed and performance are your tools for success.



Weight: 55.0 g/m	Extension: 31.2% – Single
Falls: 7 – Single 26.3% – Half
..... 31 – Half 23.4% – Twin
..... 45 – Twin	Elongation: 5–80 kg (UIAA)
Impact Force: 8.2 kN – Single 6.5% – Single
..... 6.2 kN – Half 6.5% – Half
..... 9.8 kN – Twin 3.9% – Twin
	Number of Sheath Carriers: 48



Laser Orange	
DR089NA060D	\$228.00 60m (197 ft)
DR089NA070D	\$266.00 70m (230 ft)

COMPLIANT | UIAA 101 | EN 892

9.4 MM ELITE DYNAMIC ROPE MADE IN THE USA



This lightweight rope weighing in at 57.4 g/m is a favorite among the best competitive climbers in the world. It weighs as much as 1/3 less than other similar diameter ropes providing speed and agility needed for tough routes. For its size, the ELITE is pound for pound superior in number of falls and impact force ratings compared to other ropes. The ELITE is best when you need a lightweight rope for those multi-pitch, multi-route days that end in an exhausted hike out by headlamp.



Weight: 57.4 g/m	Extension: 34%
Falls: 7	Elongation: 5–80 kg (UIAA)
Impact Force: 7.9 kN 5.6%
	Number of Sheath Carriers: ... 40



Desert Dawn	
DR094KM060S	\$192.00 60m (197 ft)
DR094KM070S	\$224.00 70m (230 ft)

COMPLIANT | UIAA 101 | EN 892

9.9 MM SYNERGY MADE IN THE USA

The SYNERGY is a great all-around rope for sport or trad, short or multi-pitch routes. It is a standard kernmantle design with a thicker sheath for exceptional abrasion resistance. It's great for single rope use, is lightweight for longer hike-in access to amazing routes and has a substantial but agile feel that's noticed whether you're leading or belaying.



Weight: 62.6 g/m	Extension: 36%
Falls: 7	Elongation: 9.5%
Impact Force: 7.9 kN	Number of Sheath Carriers: 48



Azureus	
DR099JG060S	\$204.00 60m (197 ft)
DR099JG070S	\$238.00 70m (230 ft)

COMPLIANT | UIAA 101 | EN 892

10.2 MM SPIRE MADE IN THE USA

The SPIRE is an excellent all-around rope that is as at home on the crags as it is on long alpine routes. At less than 70g/m, it is a favorite of guides and others who want to combine maximum mileage with minimum weight.

GLOBAL GYM CLIMBING OUTDOOR CLIMBING

Weight:..... 69.0 g/m **Extension:**.....34%
Falls: 11 **Elongation:**6.2%
Impact Force: 7.9 kN **Number of Sheath Carriers:**... 48



Grasshopper
 DR102EQ060S \$210.00 60m (197 ft)
 DR102EQ070S \$245.00 70m (230 ft)


COMPLIANT | UIAA 101 | EN 892

10.6 MM CIRQUE MADE IN THE USA

The CIRQUE has a comfortable and solid feel that lets you forget about the rope and focus on the route! It has a high fall rating while providing minimal impact force. The CIRQUE is supple, has great knot ability and is easily managed with most gear. This rope provides the perfect balance of weight and diameter for single rope use.

GLOBAL ROPES COURSE OUTDOOR CLIMBING

GYM CLIMBING
Weight:..... 71.0 g/m **Extension:**.....34%
Falls: 12 **Elongation:**7.7%
Impact Force: 7.9 kN **Number of Sheath Carriers:**... 48



Mystic Canyon
 DR106AZ060S \$216.00 60m (197 ft)
 DR106AZ070S \$252.00 70m (230 ft)
 DR106AZ200S \$692.00 200m (656 ft)

COMPLIANT | UIAA 101 | EN 892

10.6 MM PMI® GYM PRO MADE IN THE USA

10.6 PMI® Gym Pro is a top choice for climbing gyms, schools, guides and other situations where it will see some heavy use. It has a 22% thicker sheath than most other PMI Dynamic™ ropes, providing superior protection from dirt and wear over time. Although it is a top choice for gyms, this versatile rope is also rated for lead climbing under UIAA standards, so you can take it with you wherever you go!

GLOBAL ROPES COURSE OUTDOOR CLIMBING

GYM CLIMBING

Weight:..... 69.0 g/m **Extension:**.....33%
Falls:8 **Elongation:**6.8%
Impact Force: 8.2 kN **Number of Sheath Carriers:**... 32



Khaki Wild Berry
 DR106AG060S \$207.60 DR106AI060S \$207.60 60m (197 ft)
 DR106AG200S \$692.00 DR106AI200S \$692.00 220m (656 ft)

COMPLIANT | UIAA 101 | EN 892

11 MM LATITUDE MADE IN THE USA

The LATITUDE is the largest diameter of the PMI Dynamic™ single ropes. It has an incredible fall rating of 16 while providing an easily managed agile feel. Ideal for work-at-height applications that allow dynamic rope use. Also, great for groups of all climbing abilities, ropes courses and guiding with high use and abuse potential. The impact force and weight ratio are ideal for this solid rope that is built to last and take on any challenge you choose.

GLOBAL ROPES COURSE OUTDOOR CLIMBING

GYM CLIMBING

Weight:..... 81.0 g/m **Extension:**.....34%
Falls: 16 **Elongation:**7.2%
Impact Force: 8.5 kN **Number of Sheath Carriers:**... 48



Raven
 DR110FD060S \$234.00 60m (197 ft)
 DR110FD070S \$273.00 70m (230 ft)
 DR110FD200S \$780.00 200m (656 ft)

COMPLIANT | UIAA 101 | EN 892

PMI DYNAMIC ROPES

PMI Dynamic is designed for mountaineering and climbing, in accordance with UIAA 101 and EN 892. While an excellent choice for recreational use, PMI Dynamic is super-durable and well-suited to professional use by professional rescuers, mountain-guides and challenge courses.



SEWN-EYES MADE IN THE USA

PMI uses precision stitching to create a permanent, sewn termination that is stronger than any knotted termination and nearly as strong as the rope itself. Heat shrink tubing protects the stitching and the label from abrasion. PMI can sew either one or two end terminations on the following ropes and these are certified as Manufacturer Supplied Eye Terminations per NFPA 1983:2012:

- [ROPE ACCESS](#)
- [ROPES COURSE](#)
- [UTILITIES SAFETY](#)
- [TOWER WORK](#)
- [FALL PROTECTION](#)
- [ARBORIST](#)

Key Features:

- Streamlined permanent termination
- Stronger than knots
- No knots
- Two separate but equal blocks of stitching provide greater safety
- Nearly as strong as the rope

9 MM

MBS: 14 kN
(3147 lbf – PMI® Hudson Classic Pro EZ)

One End	Two Ends
KT36088	KT36089
\$29.50	\$58.00

COMPLIANT | NFPA 1983 (2012)
E (WITH 9 MM PMI® HUDSON CLASSIC PROFESSIONAL ONLY)

10 MM

MBS: 28 kN
(6295 lbf – PMI® Hudson Classic Pro EZ)

One End	Two Ends
KT36086	KT36087
\$29.50	\$58.00

COMPLIANT | NFPA 1983 (2017)
T (WITH 10 MM PMI® HUDSON CLASSIC PROFESSIONAL ONLY)

11–11.5 MM

MBS: 29.3 kN **MBS2:** 38.6 kN
(6587 lbf – PMI® Hudson Classic Pro EZ) (8678 lbf – PMI® Extreme Pro™)

One End	Two Ends
KT36084	KT36085
\$29.50	\$58.00

COMPLIANT | NFPA 1983 (2017) | T (WITH 11 MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® EXTREME PRO) | ANSI Z359.15 (WITH 11 MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® EXTREME PRO)

12.5–13.3 MM

MBS: 43.3 kN **MBS2:** 42.1 kN
(9734 lbf – PMI® Hudson Classic Pro EZ) (9464 lbf – PMI® Hudson Classic Pro with Unicore®)




One End	Two Ends
KT36080	KT36083
\$29.50	\$58.00

COMPLIANT | NFPA 1983 (2017) | G (WITH 12.5MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® HUDSON CLASSIC | PROFESSIONAL WITH UNICORE® TECHNOLOGY) | ANSI Z359.15 (WITH 12.5MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® HUDSON CLASSIC PROFESSIONAL WITH UNICORE® TECHNOLOGY)

TERMINATIONS

Ropes must be sewn before leaving the factory. Not all ropes that can have terminations are NFPA or ANSI compliant. PMI can sew either one or two end terminations on the ropes listed below:

- 9 mm** PMI® Hudson Classic Pro EZ or Max
- 10 mm** PMI® Hudson Classic Pro EZ, Max or Sport
- 11 mm** PMI® Hudson Classic Pro EZ, Max or Sport, PMI® Isostatic, PMI® Access Pro, PMI® Extreme Pro™
- 12.5 mm** PMI® Hudson Classic Pro EZ, Max or Sport, PMI® Retro
- 13 mm** PMI® Isostatic

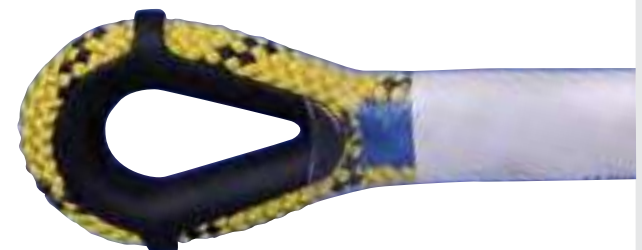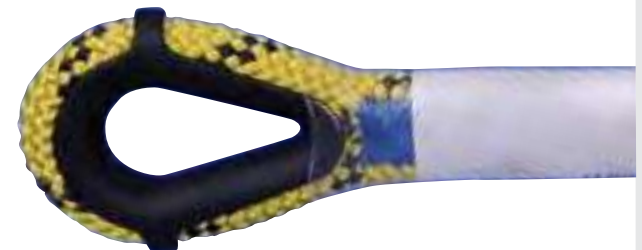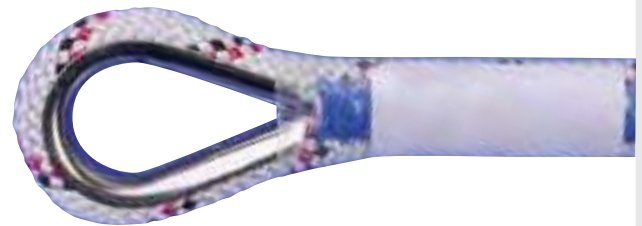



COMPACT SEWN TERMINATION

Key Features:

- Streamlined permanent termination
- No knots
- Nearly as strong as the rope
- Stronger than knots
- Two separate but equal blocks of stitching provide greater safety

11MM

MBS:36.3 kN
(8161 lbf – PMI® Extreme Pro)

One End KT36165 \$13.00	Two Ends KT36177 \$24.50
-------------------------------	--------------------------------

COMPLIANT | NFPA 1983 (2017), T (WITH 11 MM PMI® EXTREME PRO) | ANSI Z359.15 (WITH 11 MM PMI® EXTREME PRO)

SEWN TERMINATION

PMI uses precision stitching to create a permanent, sewn termination that is stronger than any knotted termination and nearly as strong as the rope itself. Heat shrink tubing protects the stitching and the label from abrasion. PMI can sew either one or two end terminations on the following ropes and these are certified as manufacturer Supplied Eye Terminations per NFPA 1983:2012:

- 9 mm** Classic Pro EZ or max, Passage
- 10 mm** Talon, Classic Pro EZ or max, Retro, Sport
- 11 mm** Talon, Classic Pro EZ or max, Sport, Passage, Isostatic, HTQ, Access Pro, ExtremePro
- 12.5 mm** Classic Pro EZ or max, Retro, Sport, Isostatic, HTQ, Access Pro

Call PMI Customer Service with any questions.



PMI® SWAGED TERMINATIONS

High strength, no-knot terminations for PMI® Classic and Sport ropes. PMI swaged rope terminations are always stronger than any knotted termination. Swaged terminations are formed using aluminum sleeves and a stainless steel thimble. Swages are applied to the rope using a precision steel die and the resulting termination is nearly as strong as the rope itself. Only PMI® Classic and Sport ropes may be swaged. (Ropes may not be swaged after leaving the factory.)

- ROPE ACCESS
- ROPES COURSE
- UTILITIES SAFETY
- TOWER WORK
- FALL PROTECTION
- ARBORIST

Key Features:

- High strength termination
- Stronger than knots
- Available for 11 mm or 12.5 mm PMI® Classic Ropes

11 MM

MBS:26 kN
.....(5845 lbf)

MBS:31.1 kN
(6992 lbf – PMI® Hudson Classic Pro EZ)

Thimble HD26056 \$4.75	One End KT36027 \$35.00	Two Ends KT36028 \$63.00
------------------------------	-------------------------------	--------------------------------

COMPLIANT | NFPA 1983 (2017) | T (WITH 11 MM PMI® HUDSON CLASSIC PROFESSIONAL ONLY) | ANSI Z359.1 (WITH 11 MM PMI® HUDSON CLASSIC PROFESSIONAL ONLY)

12.5 MM

MBS:39 kN
.....(8768 lbf)

MBS:42 kN
(9442 lbf – PMI® Hudson Classic Pro EZ)

MBS:38.5 kN
(8655 lbf – PMI® Hudson Classic Pro with Unicore®)

Thimble HD26014 \$6.00	One End KT36025 \$37.00	Two Ends KT36026 \$67.00
------------------------------	-------------------------------	--------------------------------

COMPLIANT | NFPA 1983 (2017) | G (WITH 12.5 MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® HUDSON CLASSIC PROFESSIONAL WITH UNICORE® TECHNOLOGY) | ANSI Z359.15 (WITH 12.5 MM PMI® HUDSON CLASSIC PROFESSIONAL OR PMI® HUDSON CLASSIC PROFESSIONAL WITH UNICORE® TECHNOLOGY)





BOKAT ROPE WASHER

BY PMI® MADE IN THE USA

A built in brush makes this the best cleaning rope washer we've ever used. Just hook it up to your hose, turn on the water, and pull the rope through the washer. The water loosens dirt and the brush scrubs it off.

Key Features:

- Easy to use
- Use with PMI® Rope Soap

RC48002 \$42.00 **Best Seller**



WHIP END DIP

Seal your rope ends to prevent fraying and add a color coding option to your gear with this water based liquid vinyl compound sealant.

Key Features:

- Perfect for color coding multiple ropes
- Available in three colors
- Non toxic
- Easy to apply
- 1 bottle = 64 ends (3 coats each)

Clear RC48011 \$12.00 Red RC48012 \$12.00 White RC48013 \$12.00



CORDAGE METER

If you regularly cut rope off a spool, a cordage meter is an indispensable tool. While you pull the rope through the meter the toothed measuring wheel and stainless steel pressure shoe assures uninterrupted NO SLIP contact with the cordage. The meter should be firmly mounted for optimum accuracy using the optional brackets available. The extended bracket allows the meter to be pivoted out of the way when not in use. Conforms to Weights & Measures specifications in U.S.A. and Canada.

Key Features:

- Available in Feet or Metric measurements
- Digital Counter adds or subtracts
- Resets to ZERO with one turn of knob
- Measures ropes and cordage from ¼" (6 mm) to ¾" (20 mm) diameter

REGULAR

RC48003	\$408.00	Units – Feet
RC48004	\$408.00	Units – Meter
RC48005	\$37.50	Extended Bracket for cordage meter
RC48006	\$10.00	Standard bracket for cordage meter

SMALL Special Order

RC48040	\$427.00	Units – Feet
RC48041	\$427.00	Units – Metric



ELECTRIC HOT KNIFE

Fusing rope ends helps protect your rope and prevent unraveling after cutting the rope.

Key Features:

- Table top size
- Operates on 110 volts AC
- Red 'on' light
- Replacement blades available
- Heats up to 1200 deg F

Weight:..... 2.44 lbs (1.111 kg)

Electric Hot Knife	Replacement Blade
RC48014	RC48015
\$148.00	\$24.00



PMI® SUPERMANTLE

Ballistic nylon exterior with a durable interior layer of heavy canvas wrap completely around your stationary ropes to provide maximum protection from sharp edges and abrasive surfaces. To protect moving ropes, see edge rollers

Key Features:

- Durable nylon
- New easy open flap
- Reflective strip
- Tie off tab

18 INCH (45.7 CM)	24 INCH (61.0 CM)	36 INCH (91.4 CM)
Weight:..... 4.0 oz(121 g)	Weight:..... 6.0 oz(162 g)	Weight:..... 8.0 oz(237 g)
Black ● RC48020 \$26.00	Black ● RC48018 \$29.00	Black ● RC48019 \$40.00
Yellow ● RC48021 \$26.00	Red ● RC48022 \$29.00	Red ● RC48023 \$40.00



PMI® SUPERMANTLE USA



Ballistic-type nylon burrito-style rope protector wraps completely around your rope and secures firmly to guard against the harshest surfaces. The interior layer that comes into contact with the rope is constructed of heavy cotton canvas (rather than nylon) to prevent internal abrasion.

Key Features:

- Double layer
- Ballistic-type nylon exterior
- Cotton Canvas Interior
- Hook & loop closure
- Reflective strip
- Tie off tabs at top and bottom

18 INCH (45.7 CM)	24 INCH (61.0 CM)	36 INCH (91.4 CM)
Weight:..... 4.8 oz(136 g)	Weight:..... 6.4 oz(182 g)	Weight:..... 9.2 oz(261 g)
Black ● RC48092 \$34.00	Black ● RC48094 \$38.00	Black ● RC48096 \$42.00
Red ● RC48091 \$34.00	Red ● RC48093 \$38.00	Red ● RC48095 \$42.00

SPIROLL®

Effective, economical protection for your stationary ropes, Spiroll® Rope Protectors employ a unique patent pending technology. Rugged polyurethane material wraps snugly around a single rope several times to secure itself anywhere it is placed without being tied.

Key Features:

- Polyurethane
- Wraps securely around rope
- No need to tie off
- Highly flexible
- Rugged
- Easily Movable
- For ropes 9.5 mm and up
- Silicone free

Width:.....4.00" (10.2 cm)

Length:.....24.00" (61.0 cm)

Weight:.....2.2 oz (57 g)

Orange ● Black ●
RC48032 \$12.00 RC48033 \$12.00

BERRY COMPLIANT



PMI®CANVAS EDGE PAD

When a pad is all you need, this heavy duty canvas adapts to any surface to protect one or more ropes.

Key Features:

- Heavy duty cotton canvas
- Medium and Large pads have large grommets to accept your tie-off cord

MEDIUM

Width:.....34.00" (86.4 cm)

Length:.....30.00" (76.2 cm)

Weight:..... 1.56 lbs (703 g)

Natural ●
RC48010 \$29.00

LARGE

Width:.....34.00" (86.4 cm)

Length:..... 60.00" (152.4 cm)

Weight:..... 2.94 lbs (1.340 kg)

Natural ●
RC48026U \$42.00

PMI®LIGHTWEIGHT

EDGE PAD MADE IN THE USA

A lighter weight, but still heavy-duty cotton canvas pad for protecting rope — or whatever the rope may come into contact with. Rectangular shape is ideal for wrapping around a beam or a tree. Includes accessory cord.

Key Features:

- Cotton Canvas
- Green Color
- Double Layer
- Corner Grommets
- Prerigged with accessory cord
- Best for non-moving ropes

SMALL

Width:.....12.00" (30.5 cm)

Length:.....33.00" (83.8 cm)

Weight:.....13.4 oz (380 g)

Green ●
RC48010 \$29.00

BOX OF PMI® ROPE SHORTS

New pieces of PMI static rope. Colors, lengths, and type of static rope vary by box. Each box contains 3 or 4 pieces of rope depending on the length of each rope.

11 MM (7/16")

- PMI® Box of 11 mm rope, short lengths – various colors

SP55141 \$35.00

12.5 MM (1/2")

- PMI® Box of 12.5 mm rope, short lengths – various colors

SP55140 \$45.00



PMI® ROPE SOAP

Giving you a clean rope that will last. PMI's Rope Soap gently removes dirt, oil, grease, soot, smoke, and other grime.

Key Features:

- 1 bottle does up to 4-5 loads
- 6 to 8 oz with 15 gallons of water
- Biodegradable
- 8.5 pH

RC48031 \$27.00

PMI® ROPE MARKING SOLUTION

Protect rope ends and provide important information such as when a rope is put into service, ID, etc. Write your own information on the ID tags and slip between shrink tube and rope.

Key Features:

- Kit includes 6 tags and 12 inches of 3/4" shrink tube
- Marks any rope (RC48007 3/8" kit only)
- Easy to apply
- Long lasting

RC48030 \$8.00

CLEAR 3/8" SHRINK TUBING

3/8" Bulk Shrink for 10 mm Rope
RC48007
\$0.54

CLEAR 3/4" SHRINK TUBING

3/4" Bulk Shrink for 11-16 mm Rope
RC48008 \$0.80

60 ADDITIONAL TAGS

RC48001 \$46.00



PMI® LAUNDRY BAG

Use this protective black polyester mesh bag when washing rope, webbing, and other soft goods. Use several bags to keep like-items sorted, keep your gear together and prevent it from tangling during washing. Holds 250 ft of 11 mm Classic Static.


Key Features:

- Great for keeping your gear sorted as well as for washing
- Works with front or top loading machines

Length:.....30.50" (77.5 cm)
Width:.....23.00" (58.4 cm)

Weight:..... 6.6 oz (187 g)

RB44046 \$23.50

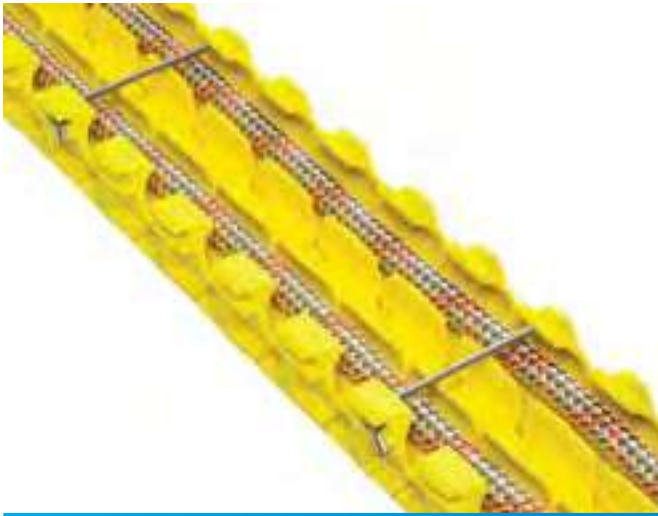

SMC PRO-TECH EDGE

PROTECTION **MADE IN THE USA**



SMC's new Pro-Tech Rope Protection System was created to be the ultimate solution to challenging rope protection scenarios. Pro-Tech can handle up to three moving or fixed ropes with captive pins that keep the ropes from "jumping the tracks." The engineering-grade plastic was rigorously tested for durability and a low coefficient of friction to ensure that your ropes will be resolutely protected from damage while still sliding cleanly over obstacles. The "tractor tread" design articulates to match virtually any terrain feature and the modular system is infinitely reconfigurable giving you unsurpassed flexibility and peace of mind when rigging. Pro-Tech is available in 23.4" lengths or you can purchase by the link & build your own.

Key Features:

- Material SCE Plastic / Stainless Steel Pins

Weight:..... 1 lbs 11 oz (755 g) **Length:**.....23.40" (59.5 cm)
Width:.....3.50" (8.8 cm) **Height:**1.20" (3.1 cm)

Blue ● Yellow ●
 SM148302 SM148304
 \$119.00 \$119.00

SHERRILL BIG SHOT

Rapidly deliver a leader line across difficult vertical or horizontal terrain with this innovative and economical alternative to traditional "line guns". Unit can be assembled in a matter of seconds and will throw a lightweight Spectra line up to 120 ft vertically or more than 300 ft horizontally.

Key Features:

- Includes two 4 foot fiberglass poles, BIG SHOT head, 200 feet of Neon 3 line, throwline bag, 8 and 10oz throw weights, replacement BIG SHOT tubing and heavy-duty carrying case

Height:10.75" (27.3 cm) **Weight:**..... 14.31 lbs (6.490 kg)
Length:..... 51.50" (130.8 cm) **Case Weight:** 6.00 lbs (2.720 kg)
Width:.....7.50" (19.0 cm)

Big Shot Deluxe Kit
 LT41010 \$299.99

Big Shot Carrying Case
 LT41003 \$58.95



SMC FLEX **MADE IN THE USA**

SMC originally designed the FLEX for the demanding Technical Fire Rescue market as a canvas replacement. Soon after using the FLEX, we realized it is much more than the ultimate in configurable rope management and protection. In fact, the FLEX is FLEXible in its uses - the only limitation is your imagination. Use a stand-alone FLEX or connect multiple FLEX pads with the FLEX CLIPS to help solve everyday problems.

FLEX PAD

Height:0.75" (1.9 cm) **Length:**.....16.00" (40.6 cm)
Width:.....8.00" (20.3 cm) **Weight:**.....4 oz (113 g)

SM148200 \$18.95

FLEX KIT (2 PADS, CLIPS)

SM148202 \$39.75

FLEX CLIP KIT

SM148210 \$6.75

Rope and tree not included





SMC ROPE TRACKER MADE IN THE USA

The SMC Rope Tracker is engineered to secure, capture, protect and manage multiple ropes when negotiating difficult edge transitions. The SMC Rope Tracker is manufactured from a high quality durable abrasion resistant thermoplastic blend to minimize weight and maximize strength.

Key Features:

- A channel and rib design give users the ability to manage ropes up to 16 mm
- Body will flex to 90° edge angles

Height: 1.00" (2.5 cm) **Length:** 20.10" (51.1 cm)
Width: 3.40" (8.6 cm) **Weight:** 14.5 oz (413 g)

Orange ●
 SM148100 \$73.00

Rope, tree, and carabiner not included



SMC ROOF ROLLER MADE IN THE USA

Specialized edge protection designed for right angle structural edges. The outer roller "reaches" out over the edge to protect your ropes and reduce friction for a long haul.

Key Features:

- Efficient rollers
- Two 4" wide aluminum rollers
- Holes for permanent mounting
- Neoprene pad on bottom
- 5/8" steel axle

1 ROLLER

Height: 5.90" (15.0 cm) **Weight:** 4.63 lbs (2.09 kg)
Width: 9.90" (25.1 cm) **Sheave:** 2.50"
Length: 10.00" (25.4 cm) **Bearing:** Oilite

Yellow ●
 SM149000 \$315.00

Notch will fit over ladder rungs. Carabiners not included



SMC EDGE ROLLER MADE IN THE USA

Reduce friction when going over the edge with the versatile SMC/RA Edge Roller. Two Edge Rollers connected by quick links will lay over a right angle such as a rock wall or edge of a building. This efficient 4" wide single edge roller ships with screw links for connecting two or more rollers together.

Key Features:

- 5/8" steel axle
- Neoprene on bottom
- Two 3/16" Quick Links included
- 4" wide aluminum roller

1 ROLLER

Height: 4.25" (10.8 cm) **Weight:** 3.13 lbs (1.410 kg)
Width: 6.90" (17.5 cm) **Sheave:** 2.50"
Length: 9.90" (25.1 cm) **Bearing:** Oilite

Red ●
 SM148500 \$208.00

Each roller is sold individually



PMI® EDGE ROLLER

SYSTEM MADE IN THE USA

Three linked units with hard anodized aluminum side plates and two roller bars each. This lightweight and compact roller can be used linked together with the furnished screw links at sharp edges, or separated for long gradual breakovers.

Key Features:

- Efficient rollers
- Two 4" wide aluminum rollers
- Holes for permanent mounting
- 5/8" steel axle

Height: 3.00" (7.6 cm) **Length:** 22.00" (55.9 cm)
Width: 6.50" (16.5 cm) **Weight:** 2.75 lbs (1.250 kg)

HD26086 \$234.00

Two rollers per unit



WEBBING AND CORDAGE

Accessory Cord to sewn Prusiks, PMI has all the bases covered. Whether you're looking for spools of webbing and cord in bulk, or for sewn straps and lanyards, you'll find a wide assortment to choose from at PMI. And, if you don't find something you're looking for, just ask. We will be happy to try to help.

ACCESSORY CORD MADE IN THE USA

PMI® Accessory Cords are made of durable kernmantle construction to UIAA standards and are great for a wide variety of uses. The smaller PMI® Accessory Cords can be used for many applications such as boot laces, lanyards, tent/shelter tie-down cords, equipment fixes and much more. Larger diameters of PMI® Accessory Cords may be used in applications including building climbing anchors, Prusik cords and a wide variety of other uses. These cords are made with the ideal combination of strength, flexibility, and durability.



Key Features:

- 100% nylon
- Available from 2 mm to 9 mm
- Discounted price for spooled lengths

2 MM (5/64")

Diameter:.....2 mm — 2.1 g/m **MBS:** 0.9 kN (202 lbf)

Multi Color

CC020ZA001S \$0.41 Per Meter
 CC020ZA100S \$39.00 100 m Spool 7.0 oz (200 g)
 CC020ZA200S \$78.00 200 m Spool 14.0 oz (400 g)

3 MM (1/8")

Diameter:.....3 mm — 6.2 g/m **MBS:** 2.7 kN (607 lbf)

Black

CC030MB001S \$0.49 Per Meter
 CC030MB100S \$47.00 100 m Spool 1.31 lbs (590 g)

Multi Color A

CC030MC001S \$0.49 Per Meter
 CC030MC100S \$47.00 100 m Spool 1.31 lbs (590 g)

Multi Color B

CC030ME001S \$0.49 Per Meter
 CC030ME100S \$47.00 100 m Spool 1.31 lbs (590 g)
 CC030ME200S \$92.40 200 m Spool 3.38 lbs (1.542 kg)

4 MM (5/32")

Diameter:.....4 mm — 11.7 g/m **MBS:** 3.5 kN (787 lbf)

Black

CC040OB001S \$0.80 Per Meter
 CC040OB100S \$76.00 100 m Spool 2.88 lbs (1.315 kg)

Multi Color A

CC040OC001S \$0.80 Per Meter
 CC040OC100S \$76.00 100 m Spool 2.69 lbs (1.225 kg)

Multi Color B

CC040OE001S \$0.80 Per Meter
 CC040OE100S \$76.00 100 m Spool 2.69 lbs (1.225 kg)
 CC040OE200S \$152.00 200 m Spool 4.88 lbs (2.200 kg)

5 MM (13/64")

Diameter:.....5 mm — 17.8 g/m **MBS:** 5.4 kN (1214 lbf)

Black

CC055QB001S \$1.05 Per Meter
 CC055QB100S \$100.00 100 m Spool 4.19 lbs (1.900 kg)

Multi Color A

CC055QC001S \$1.05 Per Meter
 CC055QC100S \$100.00 100 m Spool 4.19 lbs (1.900 kg)

Multi Color B

CC055QD001S \$1.05 Per Meter
 CC055QD100S \$100.00 100 m Spool 4.19 lbs (1.900 kg)

Multi Color C

CC055QE001S \$1.05 Per Meter
 CC055QE100S \$100.00 100 m Spool 4.19 lbs (1.900 kg)

6 MM (15/64")

Diameter:.....6 mm — 25.8 g/m **MBS:** 7.2 kN (1619 lbf)

Black

CC060SB001S \$1.38 Per Meter
 CC060SB100S \$131.00 100 m Spool 5.31 lbs (2.404 kg)

Multi Color A

CC060SC001S \$1.38 Per Meter
 CC060SC100S \$131.00 100 m Spool 5.31 lbs (2.404 kg)

Multi Color B

CC060SD001S \$1.38 Per Meter
 CC060SD100S \$131.00 100 m Spool 5.31 lbs (2.404 kg)

7 MM (9/32")

Diameter:.....7 mm — 33.2 g/m **MBS:** 11.9 kN (2675 lbf)

Black

CC070UB001S \$1.69 Per Meter
 CC070UB050S \$80.50 50 m Spool 3.19 lbs (1.452 kg)
 CC070UB100S \$161.00 100 m Spool 6.38 lbs (2.903 kg)

Multi Color A

CC070UC001S \$1.69 Per Meter
 CC070UC050S \$80.50 50 m Spool 3.19 lbs (1.452 kg)
 CC070UC100S \$161.00 100 m Spool 6.38 lbs (2.903 kg)

Multi Color B

CC070UE001S \$1.69 Per Meter
 CC070UE050S \$80.50 50 m Spool 3.19 lbs (1.452 kg)
 CC070UE100S \$161.00 100 m Spool 6.38 lbs (2.903 kg)

8 MM (5/16")

Diameter:.....8 mm — 42.0 g/m **MBS:** 14.3 kN (3214 lbf)

Black

CC080WB001S \$2.12 Per Meter
 CC080WB050S \$101.00 50 m Spool 4.50 lbs (2.041 kg)
 CC080WB100S \$202.00 100 m Spool 9.00 lbs (4.082 kg)

Multi Color A

CC080WC001S \$2.12 Per Meter
 CC080WC050S \$101.00 50 m Spool 4.50 lbs (2.041 kg)
 CC080WC100S \$202.00 100 m Spool 9.00 lbs (4.082 kg)

9 MM (23/64")

Diameter:.....9 mm — 50.4 g/m **MBS:** 14.8 kN (3327 lbf)

Black

CC090YB001S \$2.75 Per Meter
 CC090YB050S \$131.00 50 m Spool 5.31 lbs (2.404 kg)
 CC090YB100S \$262.00 100 m Spool 10.63 lbs (4.808 kg)

Multi Color A

CC090YC001S \$2.75 Per Meter
 CC090YC050S \$131.00 50 m Spool 5.31 lbs (2.404 kg)
 CC090YC100S \$262.00 100 m Spool 10.63 lbs (4.808 kg)

COMPLIANT: 4 MM-8 MM UIAA 102



RETRO REFLECTIVE

PRUSIK CORD MADE IN THE USA

PMI's Retro Reflective nylon cord has the added value of a reflective tracer for maximum visibility in any situation.

Key Features:

- 100% nylon
- Available in 7 mm & 8 mm
- UIAA Certified

7 MM (9/32")

Weight:.....29,0 g/m **MBS:** 10,7 kN (2405 lbf)



Yellow/Red
 CC070UL001S \$2.27 per meter



Blue/Red
 CC070UM001S \$2.27 per meter

8 MM (5/16")

Weight:.....39,0 g/m **MBS:** 13,4 kN (3012 lbf)



Green/Blue
 CC080WL001S \$2.65 per meter



Red/Yellow
 CC080WM001S \$2.65 per meter

COMPLIANT: UIAA 102



LUMI-LINE

Set up systems through the night with Lumi-Line. The special phosphorescent striped sheath will glow after extended exposure to a light source.

Key Features:

- 100% nylon
- Glows for up to 10 hours
- 7 mm
- Available in 6.4 m Cordelette
- White phosphorescent tracer
- UIAA 102

Material: Nylon Sheath **MBS:** 10,7 kN (2405 lbf)

..... Nylon Core

Weight:..... 29.0 g/m

Blue/White

CC070UG001S \$2.63 per meter
 CC070UG050S \$127.50 50 m Spool 3.19 lbs (1.452 kg)
 CC070UG100S \$255.00 100 meter Spool 6.38 lbs (2.903 kg)

CORDAGE MBS

The MBS figures below apply to all cords shown on pages 32-34 (not including Sewn Prusik Cord Loops, Tuff Cord, and Utility Cord).

Diameter	MBS
2 mm - 2.1 g/m	0.9 kN (202 lbf)
3 mm - 6.2 g/m	2.7 kN (607 lbf)
4 mm - 11.7 g/m	3.5 kN (787 lbf)
5 mm - 17.8 g/m	5.4 kN (1214 lbf)
6 mm - 25.8 g/m	7.2 kN (1619 lbf)
7 mm - 33.2 g/m	11.9 kN (2675 lbf)
8 mm - 42 g/m	14.3 kN (3214 lbf)
9 mm - 50.4 g/m	14.8 kN (3327 lbf)



PMI® TWO-EYED CYCLONE

These prusiks feature eye-to-eye construction in a 50% aramid, 50% polyester material, for heat resistance and durability. Commonly used by arborists for footlock and double rope techniques, eye to eye split tail prusiks may also be used to create a convenient, versatile self-locking hitch for other applications as well. The thermally resistant material of the Cyclone helps reduce glazing due to heat buildup, thereby increasing its usable life.



Diameter:.....10 mm **MBS:** 22 kN (5000 lbf)

..... (25/64") – 50.4 g/m

76 CM (30")

SG51280 \$27.00

90 CM (36")

SG51281 \$32.00

COMPLIANT: CE EN 354



SEWN PRUSIK

CORD LOOPS MADE IN THE USA

PMI® is proud to offer the latest innovation in accessory cords. Precision sewn loops form a sleek, low profile connection that is stronger than a knot. Clear tubing protects the stitches yet allows for easy inspection.

Key Features:

- Available in 6 mm, 7 mm, and 8 mm
- 5'8" length perfect for creating purcell prusiks
- Used in the PMI® Tandem Prusik Kit
- Used in the PMI® Tandem Prusik Kit
- Used in the PMI® Tandem Prusik Kit
- Cord also slides under the clear tubing to allow length adjustment

6 MM (15/64")

MBS: 11 kN (2473 lbf)

Multi color

- KT36094 \$10.00 11"
- KT36095 \$11.00 20"
- KT36096 \$12.50 44"
- KT36097 \$14.00 5'8"

7 MM (9/32")

MBS: 15 kN (3372 lbf)



Yellow ●

- KT36137 \$11.50 19" (48.3 cm)
- KT36092 \$13.50 34" (86.4 cm)
- KT36093 \$15.50 5'8" 68.00" (172.7 cm)



Blue ●

- KT36138 \$12.00 26" (66.0 cm)
- KT36100 \$13.50 34" (86.4 cm)
- KT36101 \$15.50 5'8" 68.00" (172.7 cm)

8 MM 5/16")

MBS: 20 kN (4496 lbf)



Green ●

- KT36090 \$12.00 16" (40.6 cm)
- KT36091 \$12.00 22" (55.9 cm)
- KT36161 \$12.00 26" (66.0 cm)



Red ●

- KT36098 \$12.00 16" (40.6 cm)
- KT36160 \$12.00 20" (50.8 cm)
- KT36099 \$12.00 22" (55.9 cm)
- KT36190 \$12.00 26" (66.0 cm)

PRUSIK CORD MADE IN THE USA

PMI's sturdy 100% nylon prusik cord in standard colors to help keep your gear organized.



Key Features:

- 100% nylon
- UIAA 102 Certified

7 MM (9/32")

Weight:.....29,0 g/m

MBS: 10.7 kN (2405 lbf)



Yellow/Red ●

- CC070UJ001S \$1.69 Per Meter
- CC070UJ050S \$80.50 50 m Spool
- 3.19 lbs (1.452 kg)



Blue/Red ●

- CC070UK001S \$1.69 Per Meter
- CC070UK050S \$80.50 50 m Spool
- 3.19 lbs (1.452 kg)

- CC070UJ100S \$161.00 100 m Spool
- 6.38 lbs (2.903 kg)

- CC070UK100S \$161.00 100 m Spool
- 6.38 lbs (2.903 kg)

8 MM (5/16")

Weight: 39,0 g/m

MBS: 13.4 kN (3012 lbf)



Green/Blue ●

- CC080WF001S \$2.12 Per Meter
- CC080WF050S \$101.00 50 m Spool
- 4.50 lbs (2.041 kg)



Red/Yellow ●

- CC080WG001S \$2.12 Per Meter
- CC080WG050S \$101.00 50 m Spool
- 4.50 lbs (2.041 kg)

- CC080WF100S \$202.00 100 m Spool
- 9.00 lbs (4.082 kg)

- CC080WG100S \$202.00 100 m Spool
- 9.00 lbs (4.082 kg)

COMPLIANT: UIAA 102

TUFF CORD MADE IN THE USA

A great choice for extreme rigging applications. This durable cord has a lower stretch core and tighter sheath than our other accessory cords and is especially good for mountain guides, lightweight expeditions, and in pre-rigged haul systems.

Key Features:

- 100% nylon
- Higher abrasion resistance than regular accessory cords
- The only cord of its kind on the market
- Tuff cord is used in the JR Haul System

7 MM (9/32")

Weight:..... 38 g/m

Elongation: 10.0% at 1000 lbf

MBS: 11 kN (2473 lbf)

.....7.8% at 600 lbf

.....5.1% at 300 lbf

Elongation at 10 MBS:.....4.4%



Orange/Blue ●

- SR0700X001E \$2.50 Per Meter
- SR0700X100E \$244.00 100 m Spool
- 8.38 lbs (3.797 kg)



Black ●

- SR070BK001E \$2.50 Per Meter
- SR070BK100E \$244.00 100 m Spool

COMPLIANT: CI 1801, STATIC



BAGGED CORD MADE IN THE USA

PMI's sturdy 100% nylon cord pre-cut and bagged for display. Available in 30 ft and 52 ft. 4 mm through 8 mm is UIAA 102.



6 MM (15/64")

Weight:..... 25.8 g/m **MBS:** 7.2 kN (1619 lbf)

15.8 m (52 ft)	15.8 m (52 ft)
Mantis ●	Caribbean ●
CC060SH016S	CC060SI016S
\$22.08	\$22.08

7 MM (9/32")

Weight: 33.2 g/m **MBS:** 11.9 kN (2675 lbf)

9.1 m (30 ft)	9.1 m (30 ft)
Multi Color	Camo ●
CC070UC009S	CC070DC009S
\$15.21	\$15.21

COMPLIANT: 4 MM – 8 MM UIAA 102

NITELINE MADE IN THE USA

Glow in the dark and Retro reflective yarns work together to make this 3 mm accessory cord visible in low-light conditions. A great choice for creating gear lanyards, tent lines, or other marking purposes.

Key Features:

- 100% nylon
- Glows for up to 10 hours
- 3 mm
- White phosphorescent sheath tracer
- Reflective tracers

3 MM (1/8")

Weight:.....7 g/m **MBS:** 1.8 kN (405 lbf)

Blue/White ●	
CC030MH015S	\$20.10 15 m 4.0 oz (106 g)
CC030MH050S	\$64.00 50 m Spool 12.0 oz (349 g)
CC030MH100S	\$128.00 100 m Spool 1.56 lbs (699 g)
CC030MH200S	\$250.00 200 m Spool 3.06 lbs (1.400 kg)



PMI® UTILITY CORD MADE IN THE USA

PMI's strong utility cord can be used for various tasks. Take it along when you go outdoors for tent tie-down, clotheslines, securing various items to other items, and many other needs.

Key Features:

- Polyester sheath/nylon core
- Pre-cut
- Bagged

Weight:.....3.4 oz (98 g) **MBS:** 1.8 kN (400 lbf)
Length:..... 15 m (50 ft)

Black ●	Blue/Green ●	Orange ●
CC030BK015P \$5.50	CC030GR015P \$5.50	CC030OR015P \$5.50



WORK-SPEC TUBULAR WEBBING MADE IN THE USA

PMI's webbing is specially built to commercial versions of military specifications. For all rigging uses: slings, anchorages, even hasty seats.

Key Features:

- For all rigging uses
- Available in 1" and 2"
- 9 colors available in 1"
- 2" available in red
- Spool may contain splices

Material: Nylon

1"

Weight:.....36 g/yd **MBS:** 18 kN (4000 lbf)

<p>Red ● WB59001 \$1.34 / yd WB59002 \$126.00 100 yd Best Seller</p>	<p>Blue ● WB59003 \$1.34 / yd WB59004 \$126.00 100 yd Best Seller</p>	<p>Orange ● WB59005 \$1.34 / yd WB59006 \$126.00 100 yd Best Seller</p>	<p>Yellow ● WB59007 \$1.34 / yd WB59008 \$126.00 100 yd Best Seller</p>
<p>Black ● WB59009 \$1.34 / yd WB59010 \$126.00 100 yd Best Seller</p>	<p>Fluorescent Green ● WB59011 \$1.34 / yd WB59012 \$126.00 100 yd</p>	<p>Dark Green ● WB59025 \$1.34 / yd WB59021 \$126.00 100 yd</p>	<p>Purple ● WB59032 \$1.34 / yd WB59031 \$126.00 100 yd</p>

OD Green ●
WB59034
\$1.34 / yd

2"

Weight:.....75 g/yd **MBS:** 36 kN (8000 lbf)

Red ●
WB59013
\$3.09 / yd
WB59014
\$147.00 50 yd



MIL-SPEC TUBULAR WEBBING MADE IN THE USA

Built to exacting military specifications, the durability and strength of this 1" tubular webbing makes it a perfect choice for rigging anchorages, runners, slings, and more for rescue and work at height.

Key Features:

- May contain splices
- For All Types of Rigging
- Black tracer on one side

Material: Nylon

1"

Weight:.....37 g/yd **MBS:** 18 kN (4000 lbf)

<p>Red ● WB59059 \$1.57 / yd WB59058 \$170.00 115 yd</p>	<p>OD Green ● WB59061 \$1.57 / yd WB59060 \$170.00 115 yd</p>
---	--

COMPLIANT: MIL W 5625



FLAT WEBBING MADE IN THE USA

For your really tough webbing applications, flat webbing is thicker and stronger than 2" seatbelt webbing. Applications for flat webbing are endless, from sewn products to rigging.

Key Features:

- Create slings, anchorages, even hasty seats
- Available in 1"
- Spool may contain splices

Material: Nylon

1"

Weight:.....36 g/yd **MBS:** 27 kN (6000 lbf)

<p>Blue ● WB59036 \$1.85 / yd WB59035 \$88.00 50 yd</p>	<p>Black ● WB59038 \$1.85 / yd WB59037 \$88.00 50 yd</p>	<p>Red ● WB59040 \$1.85 / yd WB59039 \$88.00 50 yd</p>	<p>Yellow ● WB59046 \$1.85 / yd WB59045 \$88.00 50 yd</p>
--	---	---	--



SEWN WEBBING LOOPS MADE IN THE USA

Pre-sewn webbing loops prepare you for any rigging situation. Made from 1" tubular webbing, these sewn loops are strong and ready for use.

Key Features:

- For all rigging uses
- Standard colors for rigging
- Made with 1" tubular webbing

MBS: 32 kN (7194 lbf)

2.5 FT LOOP

Width:..... 1.00" (2.5 cm)
Length:..... 30.00" (76.2 cm)
Weight:..... 2 oz (64 g)

Green ●
 SG51141 \$18.00 5 ft

7.5 FT LOOP

Width:..... 1.00" (2.5 cm)
Length:..... 90.00" (228.6 cm)
Weight:..... 6 oz (182 g)

Blue ●
 SG51143 \$24.00 15 ft

12.5 FT LOOP

Width:..... 1.00" (2.5 cm)
Length:..... 150.00" (381.0 cm)
Weight:..... 10 oz (292 g)

Black ●
 SG51145 \$32.00 25 ft

6 FT LOOP

Width:..... 1.00" (2.5 cm)
Length:..... 72.00" (182.9 cm)
Weight:..... 5 oz (144 g)

Yellow ●
 SG51142 \$22.00 12 ft

10 FT LOOP

Width:..... 1.00" (2.5 cm)
Length:..... 120.00" (304.8 cm)
Weight:..... 8 oz (236 g)

Red ●
 SG51144 \$28.00 20 ft



PMI® MULTI STRAP

The Multi Strap is a multiple use, easy to use, and low cost tool for rescue and rigging. This one tool has over 20 uses; a pick off strap, litter bridle, adjustable footloop, multi point anchor, and patient drag just to name a few. The Multi Strap is an invaluable tool to add to any gear cache. Now made with the SMC Rigging Ring.



Key Features:

- Fast connection
- Extra layer of webbing for protection
- Supporting loads up to 22 kN (5000 lbf)
- Always select an anchor that is capable of supporting 22 kN (5000 lbf) per person attached

MBS: 22 kN (5000 lbf)
Weight:..... 5.2 oz (148 g)

Orange ●
 SG51236 \$24.00

Material: Nylon



PMI® SHORT LINK MADE IN THE USA

These sewn polyester Short Links are built with super 18 mm webbing for optimum carabiner loading while maintaining a high 22kN breaking strength.

Key Features:

- Lightweight
- Perfect for Rope Access connection point
- Sold individually

MBS: 22 kN (5000 lbf) **Size:** 19×100 mm

SG51159 \$5.00



PMI® GEAR DAISY

Constructed of 3/4" (19.05 mm) tubular webbing, this multi-loop daisy chain helps organize your rigging gear. While not rated for life safety, each loop on our gear daisy will hold 2 kN (450 lbf) because of the "double back" construction.

OUTDOOR CLIMBING

Key Features:

- Single length of webbing
- Hand loop at one end
- Organize your gear
- Made from 3/4" (19.05 mm) tubular webbing

MBS: 2 kN (450 lbf)

3 FT – 9 GEAR LOOPS


Weight: 4 oz (112 g)

Red ●
SG51035 \$19.95

4 FT – 13 GEAR LOOPS

Weight: 5 oz (155 g)

Blue ●
SG51041 \$19.95

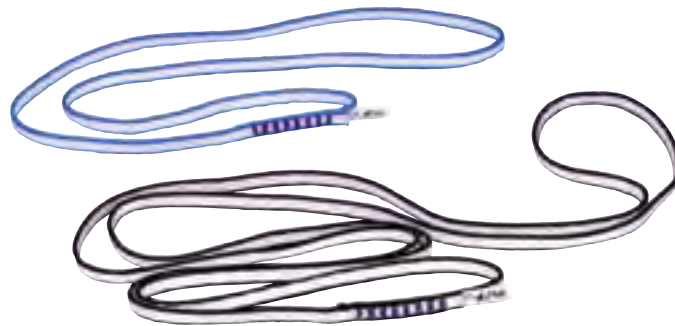

POWER SLING

These ultra high strength sewn slings are made of lightweight, abrasion resistant Dyneema®. Only 10 mm in width, these slings are as strong as thicker nylon counterparts, but have less elongation.

- GLOBAL**
- ROPE RESCUE**
- OUTDOOR CLIMBING**
- ROPE ACCESS**
- ARBORIST**
- TACTICAL**

Key Features:

- Lightweight
- Great for non dynamic anchors
- 10 mm width
- Abrasion resistant

MBS: 22 kN (5000 lbf)


60 CM

SG51157 \$9.25 1.0 oz (27 g)
Best Seller

120 CM

SG51158 \$18.00 2.0 oz (51 g)
Best Seller

COMPLIANT: UIAA CE EN 566, EN 795B, EN 354

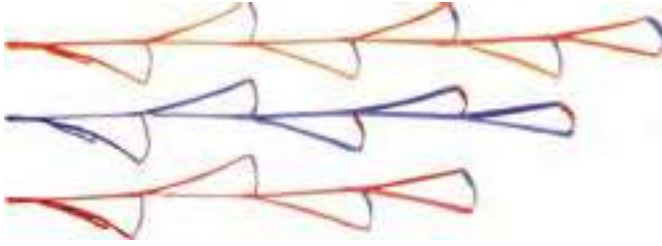

PMI® ETRIER

Use the sturdy PMI® Etrier when climbing in, on, or around structures, or anywhere you need an extra boost. Attach Etrier to an anchorage by top loop and ascend steps like a soft "stapladder."



Key Features:

- Reinforced steps in contrasting colors
- 3/4" (19.05 mm) tubular webbing
- MBS of each loop is 2 kN (450 lbf)
- Loop width 5"

MBS: 2 kN (450 lbf)

4-STEP

Height: 1.00" (2.5 cm) **Length:** 51.00" (129.5 cm)
Width: 5.00" (12.7 cm) **Weight:** 7.0 oz (201 g)

Red ●
 SG51040 \$34.95

5-STEP

Height: 1.00" (2.5 cm) **Length:** 63.00" (160.0 cm)
Width: 5.00" (12.7 cm) **Weight:** 8.0 oz (239 g)

Blue ●
 SG51034 \$37.95

6-STEP

Height: 1.00" (2.5 cm) **Length:** 72.00" (182.9 cm)
Width: 5.00" (12.7 cm) **Weight:** 9.9 oz (280 g)

Orange ●
 SG51096 \$39.95



PMI® 1-ZTEP

Adjustable, heavy-duty footloop for use in ascending.



Key Features:

- Adjustable: 28 - 46"
- Reinforced foot loop
- Heavy 3/4" (19.05 mm) flat webbing

Weight: 4.0 oz (113 g) **MBS:** 2 kN (450 lbf)

Black ●
 SG51049 \$22.00

BERRY COMPLIANT



CAVER'S COWS TAIL

Use this personal connection/positioning strap in ascending systems, or as a safety on a traverse line, or at a belay station. Requires carabiners for proper use.

Key Features:

- Made from 1/2" nylon webbing.
- Short leg: 11"
- Long leg: 21"

Static Load Limit: 589 lbf **MBS (fully extended):** .. 3890 lbf"
Shock Load: .. Factor 2, short leg: 1984 lbf
 Factor 2, long leg: 2860 lbf

Blue ●
 SG51048 \$28.00



PERSONAL GEAR

Form meets function in PMI's well-thought-out personal equipment. From harnesses to helmets to gloves and more, you'll find gear that meets the specifications and comfort you need.

Understanding Harness Standards

NFPA's standard on Life Safety Rope and Equipment for Emergency Services classifies harnesses into two groups:

Class II:

A seat harness meant for heavy duty work by one person or in rescue situations in which another person's weight may be added in the course of the rescue. (Harness must pass Upright Static, Horizontal Static, and Dynamic Drop Test of a 300 lb test dummy)

Class III:

A full body harness meant for protection and for use in rescues in which inversion might occur. (Harness must pass all 3 tests for Class II plus a 4th Head Down Static Test)



PMI® AVATAR CONTOUR FULL BODY HARNESS STND

This lightweight version of the PMI® Avatar Rescue Harness is designed for those who only need front waist and sternum attachment points. It avoids the weight and bulk of heavier harnesses that have additional attachment buckles.

Key Features:

- Waist and sternal attachments
- Fully adjustable rear leg risers and chest harness
- Adjusts to fit 31"–52" waists
- Ergonomic padding
- Non-removable chest harness
- Storage bag included

Waist:..... 31"–52" **Weight:**..... 4.19 lbs (1.900 kg)
Leg: 19"–34"

Black ●
 SG51155 \$260.00

COMPLIANT: CLASS III NFPA 1983 (2017), CLASS III

PMI® AVATAR DELUXE HARNESS

The Avatar Deluxe builds on the outstanding reputation of our traditional Avatar harness with enhancements that satisfy the most demanding applications. The Avatar Deluxe is designed to give you years of performance and comfort. Meeting both NFPA 1983 and ANSI Z359.1 standards, our newest harness is at home in rescue, rope access, or fall-arrest applications.

- ROPE ACCESS
- ROPE RESCUE
- TOWER WORK
- FIRE RESCUE
- CONFINED SPACE
- FALL PROTECTION

Key Features:

- Patented AustriAlpin COBRA™ quick release buckles; color coded for ease of use
- Waist, Sternum, Shoulder and Dorsal Attachment points
- All steel D-rings
- One piece unit for strength
- One piece shoulder padding for added comfort
- Adjustable, integrated upper and lower harness sections
- New spring loaded buckle at the dorsal and waist attachments
- Comes in two sizes Standard and Large
- Durable storage bag included

STANDARD

Waist:..... 31"–54"
Leg: 20"–33"
Weight:..... 6.00 lbs (2.722 kg)

Black ●
 SG51263 \$425.00

LARGE

Waist:..... 37"–55"
Leg: 23"–37"
Weight:..... 6.20 lbs (2.812 kg)

Black ●
 SG51264 \$425.00

COMPLIANT: NFPA 1983 (2017), CLASS III, ANSI Z359.1



CS TECH HARNESS MADE IN THE USA

PMI®'s one-piece, full-body harness was designed with the needs of the Confined Space worker in mind. Separating buckles on the leg loops and shoulder strap make this harness easy to put on and take off.

- FIRE RESCUE
- ROPE RESCUE
- CONFINED SPACE

Key Features:

- Dorsal, sternal, waist, and shoulder attachment points
- Adjustable dorsal and shoulder rings
- Break-apart buckles on legs and right shoulder
- Ergonomic shoulder straps
- Quick adjusting low profile buckles on waist
- Storage bag included

Waist: 31"–52" **Weight:** 5.06 lbs (2.300 kg)
Leg: 19"–34"

Grey ●
 SG51156 \$300.00

COMPLIANT: NFPA 1983 (2017), CLASS III

PMI® SYMPATICO HARNESS

This harness is well-suited to your every adventure, balancing the minimalist style of recreational harnesses with the extraordinary support of industrial use harnesses. It's modular design permits it to be used as just a seat, or as a seat-chest combination, making it a perfect choice for ropes course use, mountain rescue, sport rappelling, and other suspension-intensive activities. With or without the chest harness, the high attachment point at the waist means that the harness sits more deeply than a climbing harness, while the light-weight, wide waistbelt offers superior comfort, hip D-rings for positioning, and a rear waist attachment for secure restraint. Chest harness attaches quickly and securely to provide sternal and dorsal attachment points, chest-ascender link, and soft loop connection points at the shoulders for vertical lift. Quick-release adjustable buckles at waist and legs make it easy to get in and out of the harness, while low profile D-rings offer full functionality in a lightweight package. For maximum compatibility think Sympatico!

- GLOBAL
- ROPE RESCUE
- ROPE ACCESS

Waist: 34–55" **Weight:** 5.75 lbs (2.605 kg)
Leg: 22–33"

SG51289 \$225.00 **Best Seller**

COMPLIANT: CE, ASTM F1772, EN 361, EN 358, EN 813

PMI® SYMPATICO GRANDE HARNESS

The new PMI Sympatico Grande is the answer for your big and tall customers along with workers who are dressed in bulky clothing to fight the cold. No other harness can fit your biggest customer as comfortably and safely as the Sympatico Grande. This harness can accommodate waist sizes from 44 inches to 65 inches and leg diameters of 25 inches to 39 inches, big men indeed can wear this generously sized harness.

- GLOBAL
- ROPE RESCUE
- ROPE ACCESS

Waist: 44–65" **Weight:** 6.75 lbs (3.062 kg)
Leg: 25–39"

SG51283 \$225.00

COMPLIANT: CE, ASTM F1772, EN 361, EN 358, EN 813



PMI® AVATAR DIAMOND CHEST HARNESS

Providing maximum versatility for Fall Arrest or Confined Space Operations, the Diamond features sternal and dorsal attachment points as well as shoulder lifting rings. Includes a 10mm Delta Maillon screw link. Not for use without PMI® Avatar Seat Harness.

INDUSTRIAL RESCUE

Weight:..... 2.10 lbs (953 g)

Black ●
SG51045 \$195.00



PMI® AVATAR SEAT HARNESS

The Avatar Seat harness is the Cadillac of harnesses. If you spend a lot of time in a seat harness, choose the Avatar for comfort.

FIRE RESCUE ROPE RESCUE INDUSTRIAL RESCUE

Key Features:

- Front waist and lumbar attachment points
- Ergonomic padding
- Adjustable leg loops and rear risers

STANDARD

Waist:..... 30"- 55"
Leg:..... 19"- 34"
Weight:..... 4.10 lbs (1.860 kg)

Black ●
SG51043 \$335.00

LARGE-XL

Waist:..... 35"- 61"
Leg:..... 24"- 40"
Weight:..... 4.25 lbs (1.928 kg)

Black ●
SG51044 \$335.00

COMPLIANT: NFPA 1983 (2017), CLASS II



PMI® BACKCOUNTRY RESCUE HARNESS

This fully adjustable mountaineering harness is perfect for Search and Rescue professionals who require light weight comfort and adjustability. Buckles at the waist and legs allow the user to quickly adapt to different layers of clothing, whatever the weather. Reinforced polyester offers exceptional abrasion resistance, with reflective trim for nighttime visibility.

GLOBAL WILDERNESS RESCUE ROPES COURSE
 OUTDOOR CLIMBING

Waist:..... 26"-56" **Weight:**..... 1.44 lbs (473 g)
Leg:..... 18"-33"

Green/Grey ●
SG51271 \$63.00

COMPLIANT: CE, ASTM F1772, EN 12277 TYPE C

WHAT DOES ANSI Z359 COVER?

ANSI Z359 establishes performance criteria for the key equipment used in fall protection, fall restraint, and rescue after a fall.

ANSI Z359 addresses the overall fall protection program rather than just equipment. ANSI Z359.2 describes the Comprehensive Managed Fall Protection Program, while subsequent chapters are concerned with specific components and equipment.

ANSI Z359

Keeping your high work teams safe and compliant can be a full time job. Let us help!

With PMI's full line of ANSI Z359 compliant products, your crews can stay safe and meet all the latest regulatory requirements.

WHAT IS ANSI?

ANSI stands for American National Standards Institute. The Institute oversees the creation, promulgation, and use of thousands of standards and guidelines that directly impact businesses in nearly every sector, including work at height in General Industry and Construction. ANSI is the official U.S. representative to the International Organization for Standardization (ISO).





PMI® BRAVO TACTICAL HARNESS

PMI's Bravo Seat Harness is a lightweight and comfortable seat harness that provides a low-profile ideal for tactical operations, theatrical use, and any rigging or rescue applications. The black color finish keeps this harness discreet and sleek. The Bravo comes with a custom kit that can add multiple gear loops for supporting additional equipment if needed.



Key Features:

- Lightweight
- Black in color and low-profile
- Quick adjust cam buckle on adjustable waist belt
- Elastic rear straps keep leg loops positioned correctly
- Comfortable padding
- Quick clip front attachment point
- Quick release buckles on adjustable leg loops
- Sewn vertical webbing attachment points for custom gear loops

Waist: 81–137 cm (32"–54")

Leg: 56–79 cm (22"–31")

Weight: 1.1 Kg (2.43 lbs)

Black ●
SG51301 \$250.00

COMPLIANT: EN358:99; EN813:08



PMI® SPECTRUM GROUP HARNESS MADE IN THE USA

A simple yet comfortable and versatile sport harness designed to adjust to a variety of users. Perfect choice for use on a ropes course or climbing wall. Available in full-body or seat only style.



Key Features:

- Adjustable waist (24" to 48") and adjustable leg loops (up to 34")
- The Standard size adjusts to fit sizes Small, Medium, and Large

Waist: 24"–48"

Leg: Up to 34"

Weight: 15.1 oz (426 g)

Green/Red ●
SG51112 \$98.00 Full Body

Green/Red ●
SG51112 \$72.00 Seat Only



PMI® PIT VIPER CAVING HARNESS MADE IN THE USA

This caving harness features a low profile and very low frontal attachment point, making it an excellent choice for cave exploration or cave rescue. Designed to work with the Frog chest harness.



Key Features:

- Adjustable waist and leg loops
- Abrasion guards over the backs of each leg loops
- Two gear loops
- Add your own 10 mm screw link to close the front

STANDARD

Waist: 27"–39"

Leg: 20"–26"

Weight: 1.00 lbs (454 g)

Red ●
SG51038 \$111.00

LARGE

Waist: 32"–55"

Leg: 24"–30"

Weight: 1.06 lbs (476 g)

Red ●
SG51046 \$118.81



PMI® FROG CHEST HARNESS

Designed for use with a PMI® Pit Viper seat harness as part of a "Frog" climbing system used by many cavers. Add a Climbing Technology Chest Ascender EVO between the seat and chest harness, Quick-Up handled ascender, foot loop and double cow's tail slings and connectors to complete the system.

CAVE RESCUE RECREATIONAL CAVING

Weight:.....3.4 oz (96 g)

Black ●
SG51047 \$23.50



CT SEATBOARD



An evolution in comfort seat technology for rope access and work at height. This robust, adjustable positioning seat offers a broad, padded platform with raised, rigid edges to prevent straps from pressing on the technician's thighs. Sturdy gear loops on both sides, as well as underneath. Maximum stability with unsurpassed comfort and function.

- Key Features:**
- Broad, padded seat for comfort and stability;
 - Adjustable side straps with autoblocking buckles
 - Sturdy gear loops on sides and beneath
 - Gear loop connections offer convenient distribution of loads.

HD26284 \$195.00



SPREADER BAR

A spreader bar should be used any time someone is being lifted by shoulder attachment points such as those on the PMI® Avatar or the PMI® CS Tech. Lifting without using a spreader bar will cause the shoulder straps to pinch at the neck.

INDUSTRIAL RESCUE

- Key Features:**
- Nylon web Y lanyard
 - Center D ring
 - 3/4" (1.2 cm) snap hooks on both ends

Length:.....20.50" (52.1 cm) Weight:..... 1.88 lbs (853 g)
Width:.....12.00" (30.5 cm)

Black ●
HD26050 \$80.25



PMI® GEAR POCKET

This Cordura® gear pocket is designed to organize pulleys, gloves, carabiners, prusiks or any small sized gear without overloading your gear loops. It is also excellent for emergency kit use. Internal mesh divider keeps gear organized and internal adjustable loops secure gear and prevents it falling out even while inverted. The creative attachment system fits over the waistbelt of any PMI harness and allows for snug security, while the top loading design makes for easy access.


INDUSTRIAL RESCUE

- Key Features:**
- Attaches to any harness with sleek padded Velcro straps
 - 2 mesh pockets inside to keep gear in place
 - Perfect size for gloves, headlamp, food, or even a small hydration bladder

Length:.....27.00" (17.8 cm) Height: 1.50" (3.8 cm)
Width:.....10.00" (25.4 cm) Weight:.....3.5 oz (99 g)

Red ●
SG51150U \$34.95

Black ●
SG51168U \$34.95

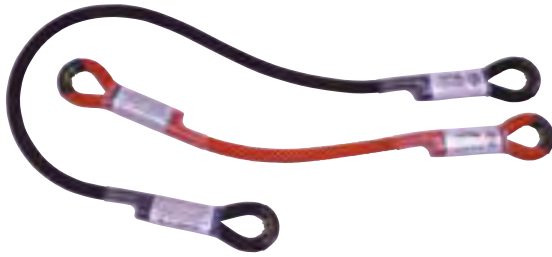

PMI® DYNAMIC

SEWN LANYARD MADE IN THE USA

The PMI® Dynamic Cows Tail Sewn Lanyard is intended for personal use such as fall arrest, fall prevention, and work positioning. Ideal for fall prevention when ascending or descending in rope access work. This lanyard has PMI® sewn eyes on each end creating a permanent, sewn termination that is stronger than any knot. Requires carabiners for proper use.

- ROPE ACCESS
- CAVE RESCUE
- RECREATIONAL CAVING

Key Features:

- Made from 11 mm PMI Dynamic™ rope
- Includes PMI Sewn Eye terminations
- Available in 4 lengths
- Quick identification while in use: red rope is shorter, black rope is longer

MBS: 22 kN (5000 lbf) Diameter:..... 7/16" (11 mm)

17.50" (44.5 CM)

Weight:..... 2.7 oz (76.5 g)

Rojo (Red) ●
SG51250 \$24.00

24.0" (60.0 CM)

Weight:..... 3.2 oz (91.3 g)

Black ●
SG51261 \$26.00

32.5" (82.6 CM)

Weight:..... 3.9 oz (110.7 g)

Black ●
SG51251 \$28.00

39.4" (100.0 CM)

Weight:..... 4.4 oz (126.0 g)

Black ●
SG51262 \$30.00

COMPLIANT: ANSI Z359.1

PMI® PICK OFF STRAP MADE IN THE USA

This traditional pick off strap has a metal D ring at the rescuers end for a metal-on-metal connection. Once connected, slack can be removed simply by pulling on the free end of the strap.

Key Features:

- Fast connection
- Hook and loop keeper
- Adjustable length:..... 8" to 50"

MBS: 20 kN (4496 lbf) Weight:..... 11.0 oz (312 g)

Black ●
SG51032
\$39.95



PMI® EASY PICK OFF STRAP

This high performance pick off strap is designed to weigh less and be less bulky, but still perform when you need it. With a sewn anchor loop on the load end and a hand loop on the haul end, this strap allows for quick weight transfer from one system to another.

INDUSTRIAL RESCUE

Key Features:

- Lightweight
- Sewn anchor loop on one end
- Hand loop
- Hook and loop keeper
- Adjustable length: 7" to 42"

MBS: 9.4 kN (2100 lbf) Weight:..... 9 oz (255 g)
Length:..... 42.00" (106.7 cm)

Black ●
SG51180M \$54.00



PMI® DELTIC ADJUSTABLE LANYARD

For positioning and restraint, nothing beats PMI's Deltic, constructed of 11.5mm low stretch rope and reinforced eye at the sewn termination. Micro-clutch rope adjuster offers security and easy adjustment without adding unnecessary weight or bulk.

- GLOBAL
- TOWER WORK
- ARBORIST
- ROPE ACCESS
- UTILITIES SAFETY

2 M (6.6 FT)

Weight:..... 1.26 lbs (570 g)

SG51275 \$98.00

COMPLIANT: CE EN 358



PMI® INTERCEPT SINGLE LANYARD

The PMI Intercept is constructed of durable kernmantle rope with durable abrasion protectors inside the sewn eye and an integral energy absorber to meet EN 355 and EN 362 standards. Removable cover is designed to accommodate thorough inspection, and a unique serial number offers maximum traceability.

- GLOBAL
- ROPES COURSE

Length:..... 1.8 m (5.9 ft) **Weight:**..... 2.07 lbs (937 g)

SG51274 \$126.00

COMPLIANT: CE EN 355, EN 362



PMI® EXTENDER

Protect your tools (up to 1 lb) from dropping with this spiral cord extendible leash. Three separate tool cords are provided to be used interchangeably with the leash, each with a retainer loop for securing tools between use.

Key Features:

- Extends up to 300%
- Mini carabiner connection
- Pairs well with GRUNT BUCKET
- Removable tool attachment loop
- 1 lb Tool Capacity
- Prevents dropped tools

Minimum length:..... 7.1"

Maximum length:..... 52.4"

Weight:..... 3.0 oz (85 g)

AC10019 \$25.00 **Best Seller**



PMI® INTERCEPT TWIN LANYARD

This V-shaped fall arrest lanyard incorporates an integral energy absorber, and complies with European fall arrest standards EN 355 and EN 362. It offers maximum protection for passing intermediate anchors on a fixed line. Sewn terminations are protected by a removable cover to permit complete inspection.

- GLOBAL
- ROPE RESCUE
- FALL PROTECTION

0.75 M

Weight:..... 3.00 lbs (1.357 kg)

SG51272 \$162.00

COMPLIANT: CE EN 355, EN 362

1.50 M

Weight:..... 3.24 lbs (1.469 kg)

SG51273 \$164.00



PMI® ADVANTAGE

For classic styling, maximum comfort and minimum impact, PMI® Advantage offers industrial Kevlar® head protection and plenty of detail oriented comfort. Fully adjustable ratchet headband and straps make this a helmet for almost any size head. Meets NFPA 1951 as a Utility Technical Rescue Protective Helmet Standard.

- GLOBAL
- TOWER WORK
- CONFINED SPACE
- ROPE ACCESS
- FIRE RESCUE
- INDUSTRIAL RESCUE

Key Features:

- Fully adjustable
- Three point chinstrap
- Headlamp retainer
- Goggle mount
- Clips to attach earmuffs

Size: One Size **Weight:**..... 1.25 lbs (567 g)
Head Circumference: 52–64 cm

- | | | |
|--|---|---|
| Orange ●
Best Seller
HL33011 \$210.00 | Red ●
Best Seller
HL33012 \$210.00 | Blue ●
Best Seller
HL33013 \$210.00 |
| White ●
Best Seller
HL33014 \$210.00 | Matte Black ●
HL33035 \$210.00 | Fluorescent Green ●
Best Seller
HL33018 \$236.00 |

COMPLIANT: ANSI Z89.1 | TYPE 1 CLASS G (2200V) TYPE 1 & 2
 NFPA 1951 EN 397

KIWI USAR HELMET

PMI is proud to offer this unique rescue helmet, compliant with the newest NFPA 1951: Standard on Protective Ensembles for Technical Rescue Operations as a Rescue and Recovery Technical Rescue Protective Helmet.

- GLOBAL
- ROPE RESCUE
- CONFINED SPACE
- FIRE RESCUE

Key Features:

- Ventilated Kevlar® RTM™
- Full head polyurethane impact liner
- Leather ratchet headband
- Leather crown comfort cap
- Nomex® chinstrap

Size: One Size **Weight:**..... 2.0 lbs (907 g)
Head Circumference: 52–64 cm

- | | | | |
|------------------|------------------|------------------|------------------|
| White ● | Red ● | Yellow ● | Black ● |
| HL33037 \$399.00 | HL33038 \$399.00 | HL33039 \$399.00 | HL33041 \$399.00 |

COMPLIANT: ANSI Z89.1 | TYPE 2 CLASS G (2200V) CE NFPA 1951 EN 443



PMI® POD

Excellent for vertical work and confined space operations, the POD is versatile, lightweight, and features a built in light pod that accepts the intrinsically safe UK4AA Light

- GLOBAL
- TOWER WORK
- CONFINED SPACE
- ROPE ACCESS
- FIRE RESCUE

Key Features:

- Three point chinstrap
- Flash light POD
- Goggle mount

Size: One Size **Weight:**..... 1.25 lbs (567 g)
Head Circumference: 52–64 cm

- | | |
|------------------|------------------|
| Red ● | White ● |
| HL33025 \$245.00 | HL33026 \$245.00 |

COMPLIANT: ANSI Z89.1 | TYPE 1 CLASS G (2200V) TYPE 1 & 2 EN 397





PMI® BRIGADE RESCUE HELMET

With classic European styling, this reinforced Kevlar® composite shell helmet offers greater comfort and protection for professional rescuers than thermoplastic climbing helmets. High-gloss, UV resistant painted exterior is safe for stickers.

- GLOBAL
- ROPE RESCUE
- CONFINED SPACE

FIRE RESCUE

Key Features:

- Lightweight Kevlar® and fiberglass composite shell.
- Nape strap with ratchet size adjustment between 52-64cm for comfortable fit.
- UV-resistant hi-gloss or matte paint finish.
- Nylon webbing cradle system for optimal comfort.
- Headband with removable merino wool for cleaning and replacement.
- 4-point polyester chinstrap with quick release buckle.

Size: One Size **Weight:** 1.52 lbs (690 g)
Head Circumference: 52–64 cm

- | | | |
|------------------|------------------|------------------|
| Red ● | White ● | Black ● |
| HL33085 \$350.00 | HL33086 \$350.00 | HL33087 \$350.00 |

COMPLIANT: ANSI Z89.1 | TYPE 1 CLASS G (2200V)
 TYPE 3 EN 397 NFPA 1951 (2013)



PMI® IMPACT

A high performance helmet offering maximum impact and penetration resistance, this helmet is the best choice for technical rescuers and rope access technicians working in demanding environments.

Key features:

- Increased Side-impact protection
- High visibility colors
- Micro-Peak brim deflects debris
- Optional stickers (included)
- Electrostatic resistance
- Custom colors available (MOQ applies)

- | | | | |
|---------------------------|---------------------------|---------------------------|---------------------------|
| White ● | Red ● | Hi-Viz Orange ● | Hi-Viz Yellow ● |
| Vented Best Seller | Vented Best Seller | Vented Best Seller | Vented Best Seller |
| HL33092 | HL33099 | HL33093 | HL33094 |
| \$107.00 | \$107.00 | \$107.00 | \$107.00 |

MEETS EN50635 LOW VOLTAGE & ANSI189.1-2014 CLASS C



PMI® E-GO

Designed to help protect workers who may be exposed to high voltage environments, this comfortable helmet carries E-rating certifications for USA (ANSI), Europe (CE), and Canada (CSA). A ratchet headband and 4-point quick release chinstrap offer stability and comfort.

Key features:

- Value-priced E-rated helmet
- Electrostatic resistance
- Non-ventilated for electrical protection
- Optional stickers (included)
- Ergonomic shell design
- Custom colors available (MOQ applies)

- | | |
|-------------------------------|-------------------------------|
| Yellow ● | Blue ● |
| Non-Vented Best Seller | Non-Vented Best Seller |
| HL33095 \$79.00 | HL33096 \$79.00 |

MEETS EN397:2012+A1:2012 (IND. HELMETS)
 EN50635 LOW VOLTAGE & ANSI Z89.1-2014 CLASS E



PMI® AIR-GO

Modern styling and certified protection at an economical price, this helmet complies with USA, Canadian, and European safety standards. This is a helmet that you'll be happy to wear.

Key features:

- Comfortable ventilated design
- Replaceable headband & strap
- Stylish ABS shell
- Optional stickers (included)
- Fast, easy adjustment from 53–64cm
- Custom colors available (MOQ applies)

- | | |
|---------------------------|---------------------------|
| White ● | Red ● |
| Vented Best Seller | Vented Best Seller |
| HL33097 | HL33098 |
| \$79.00 | \$79.00 |

MEETS EN397:2012 (INDUSTRIAL HELMETS) EN503.65 (LOW VOLTAGE)



X-TRICATOR GOGGLES

Primary eye protection intended to supplement a face shield. Mount to PMI® Advantage with preinstalled snap mount system, or use the optional mounting brackets for attachment to other helmets.

- GLOBAL
- ROPE RESCUE
- CONFINED SPACE
- FIRE RESCUE

Key Features:

- Durable comfortable face padding around eyes
- Includes on tear off lens
- Impact requirements of US MIL-V-43511C

W/MOUNT

Weight:..... 8.5 oz (176 g)

Screw, snap on mount
HL33021 \$49.50

W/O MOUNT

Weight:.....5 oz (142 g)

HL33022 \$46.00

COMPLIANT: CE EN 166 (B) ANSI Z87.1-03



STRIKETEAM XTO GOGGLES

Exclusive tech features make these the goggle of choice for wildland firefighting, technical rescue, and EMT personnel. Fully ventilated frame with buffered airflow for powerful fog resistance and high filtration of airborne particles and smoke.

- FIRE RESCUE
- ROPE RESCUE
- CONFINED SPACE

Key Features:

- 2.4 mm thick
- High impact polycarbonate lenses
- Closed cell foam padding for a perfect fit
- Anti-scratch & anti fog lenses

Weight:..... 5.0 oz (142 g)

HL33023 \$49.50

COMPLIANT: ANSI Z87.1-03

PELTOR HI VIZ EAR MUFFS

Peltor helmet mount ear protectors mount firmly to the PMI® Advantage and many other helmets for comfortable, unparalleled hearing protection. Low profile construction fits close to the head, with no protruding parts. (Mounting Clips needed for PMI Helmets.)

- ARBORIST
- INDUSTRIAL RESCUE

Weight:..... 11.0 oz (312 g)

Orange ●
HL33042 \$38.00

MOUNTING CLIPS

Key Features:

- Ear Muff Mounting Clip Set
- Pair
- Fits All Helmets
- Black Polycarbonat

Weight:.....0.4 oz (12 g)

HL33045 \$38.25



UK4AA LIGHT

The unbreakable UK4AA Light is the perfect hand held light and it works with the PMI® Pod Helmet. A bright Xenon bulb provides brilliant, long lasting light.



INDUSTRIAL RESCUE

Key Features:

- Waterproof Push-button thumb switch
- Virtually indestructible
- Powered by 4 AA batteries included

Weight:.....7,0 oz (198 g)

Yellow ●
HG32006 \$35.00

ICON

Whether you're rappelling an alpine route or 50 miles into an overnight trail run, the Black Diamond Icon Headlamp provides an unparalleled 500-lumen output, making it our most powerful light. Waterproof to 1 meter, it's fortified for mishaps, and with red, green and blue night-vision modes, its versatile for any mission and easily protects your night vision. Now with a removable battery pack that can be easily stowed in a pocket to preserve battery life and programmable brightness memory, the Icon can be customized to fit any adventure



Key Features:

- One QuadPower LED spotlight and 1 DoublePower white LED emit 500 lumens (max. setting)
- Programmable Brightness Memory gives you the option to set the brightness level when first turned on
- Removable battery pack (longer cable included)
- Red, Green and Blue night vision modes cover the spectrum of night vision needs
- Settings include full strength (in proximity and distance modes), dimming, strobe, RGB night vision options and lock mode
- Three-level power meter shows remaining battery life for three seconds after switching on headlamp
- IP67: Waterproof and dust proof—Best for saltwater and extremely wet or dusty environments. Unit is completely sealed and tested to operate up to 1 meter underwater for 30 minutes. Requires no maintenance after submersion.

Weight:.....8,1 oz (230 g)

Black ●
HG32032 \$99.95

Providing more than the latest technology, Black Diamond headlamps anticipate your needs, function flawlessly, and offer real innovation.

Reliable and lightweight, these headlamps meet the needs of anyone who accidentally - or intentionally - winds up in the dark.

Here are some considerations when choosing a light:

- Lumens — all lights below have a lumen output rating—these headlamps throw bright light far and wide.
- SuperBright LED — Providing brilliant, close-range light for reading and other handy tasks.
- Hybrid power — Mixing Xenon Bulbs with a SuperBright LED creates versatile headlamps that excel at work and play.

COSMO

After-dark dinners on the tailgate, mid-week dawn patrols or late hikes out from the crag are easily handled by the Black Diamond Cosmo headlamp, a sleek, super-bright headlamp for any outdoor pursuit that runs short on daylight. The Cosmo features 225 lumens of power and six different lighting modes, including red night vision, that all adjust with a single push-button switch. And with a sleek and modern water resistant construction, the Cosmo keeps shining the way through unexpected storms, afternoon precip and accidental dunkings.



Key Features:

- 1 TriplePower LED, 1 DoublePower LED and 1 DoublePower red LED emit 160 lumens (max setting)
- Red night-vision mode has proximity and strobe settings, and activates without cycling through the white mode
- Sleek, modern design with tiltable housing uses 3 AAA batteries
- Settings include proximity and distance modes, dimming, strobe, red night vision and lock mode
- IPX4: Storm proof—Tested to withstand rain and sleet from any angle.

Weight:.....3.0 oz (87 g)

Aluminum ● Matte Black ●
HG32029 \$39.95 HG32030 \$39.95

SPOT

Our most popular headlamp for everything from pre-work dawn patrols to late-night rappels after a long day, the Black Diamond Spot Headlamp now features 300 lumens of power in a waterproof package. Featuring PowerTap Technology, easy on-the-fly brightness adjustments are literally at the tip of your fingers. At first touch, the proximity light is illuminated, eliminating the headlamp shuffle when transitioning from camp tasks to low-light activities. With a handy lock mode, the Spot is safe from accidental battery drain while in your pack or pocket.



Key Features:

- One TriplePower LED, one SinglePower white LED and one SinglePower red LED emits 200 lumens (max setting)
- PowerTap Technology allows fast and simple transitioning between full and dimmed power in order to instantly increase illumination in distance or proximity modes
- Red night-vision mode has proximity and strobe settings, and activates without cycling through the white mode
- Sleek, low profile design uses three AAA batteries and three-level power meter shows remaining battery life for three seconds after switching on headlamp
- Settings include: full strength in proximity and distance modes, dimming, strobe, red night vision and lock mode
- IPX8: Waterproof—Tested to operate up to 1.1 meters underwater for 30 minutes. If submerged, water may enter the battery compartment and it will still operate, and it should be dried out completely afterwards.

Weight:.....3.2 oz (90 g)

Aluminum ●
HG32028 \$39.95

FORCE 6 RESCUER PFD

The Force 6 Rescue vest is equipped with a strong swimmers belt and quick-release system; providing superior safety and versatility in a streamlined version of the top of the line Swift Water Rescue Technician Force 6 Instructor's PFD.

- FIRE RESCUE
- ROPE RESCUE
- WATER RESCUE

Key Features:

- Integrated 1" nylon tape structural harness
- Foam shoulders for added strength
- Knife & scissors and strobe light attachments on both sides
- Under the arm adjustment straps
- Reflective tape over the shoulder front pockets
- Three part waist belt
- Two front mesh pockets

MED-LARGE

Weight:..... 3.4 lbs (1.500 kg)
Chest Circumference: ...32"-52"

Red ●
 SG51223 \$275.00

X-LARGE

Weight:..... 4.1 lbs (1.900 kg)
Chest Circumference: ...44"-62"

Red ●
 SG51224 \$275.00

COMPLIANT: IRIA



FORCE 6 RESCUETEC PFD

Force 6 Swift Water RescueTec PFD is a UL listed and United States Coast Guard approved Type 5 Professional Swiftwater Rescue PFD. The RescueTec PFD is feature loaded including a removable left-front pocket, dual 1 1/2 in QR belts for throw bag attachment, waist belt with Gripp-Loc to prevent ride up. Adjustable shoulders with dual AustriAlpin anodized aluminum buckles, Molded extraction handle, 4 inch Velcro® name attachment back-band, Heavy duty YKK front entry zipper, 12 elastic strap container bands, rear hydration attachment points, neoprene neck water dam, lapel strap tunnels, and reflective material on both the front and the back.

- WATER RESCUE

Key Features:

- UL listed and United States Coast Guard approved Type 5 Professional Swiftwater Rescue PFD
- Gripp-Loc on waist belt to reduce ride up
- 22 lbs. minimum flotation on both the S/M and L/XL models
- Left Front Pocket
- Shell Fabric - High tenacity 420 Denier Fabric

SMALL-MEDIUM

Weight:..... 5.00 lbs (2.268 kg)
Chest Circumference: ...28"-40"

Red ●
 SG51266 \$406.00

LARGE-XLARGE

Weight:..... 6.00 lbs (2.722 kg)
Chest Circumference: ...42"-52"

Red ●
 SG51267 \$406.00

COMPLIANT: USCG TYPE 5 PROFESSIONAL



MESH PANEL THROW BAG WITH ECONOMY THROW ROPE

Lightweight nylon throw bags stuffed with PMI®'s Economy Throw Rope.



Key Features:

- Lightweight nylon bag
- Pre-tied loop terminations
- Bag includes a flotation disc
- Rigged and ready for use

Material: Polypropylene

10 MM

15 M (49 FT)

MBS: 8 kN (1798 lbf)
Weight: 1.3 lbs (590 kg)
Height: 6.00" (15.2 cm)
Length: 13.00" (33.0 cm)
Width: 6.00" (15.2 cm)

KT36024 \$34.50

10 MM

23 M (75 FT)

MBS: 8 kN (1798 lbf)
Weight: 1.8 lbs (816 g)
Height: 6.00" (15.2 cm)
Length: 13.00" (33.0 cm)
Width: 6.00" (15.2 cm)

KT36020 \$42.50



MESH PANEL THROW BAG WITH PMI® WATER RESCUE ROPE

Lightweight nylon throw bags stuffed with PMI® Water Rescue Rope.



Key Features:

- Lightweight nylon bag
- Pre-tied loop terminations
- Bag includes flotation disc
- Rigged and ready to go
- Bags also sold separately

Material: Nylon/Polypropylene

7 MM

23 M (75 FT)

MBS: 8 kN (1798 lbf)
Weight: 1.7 lbs (789 g)
Height: 6.00" 15.2 cm
Length: 13.00" (33 cm)
Width: 6.00" (15.2 cm)

KT36021 \$62.00 **Best Seller**

10 MM

15 M (49 FT)

MBS: 16 kN (3597 lbf)
Weight: 2.31 lbs (1.043 kg)
Height: 6.00" 15.2 cm
Length: 13.00" (33 cm)
Width: 6.00" (15.2 cm)

KT36023 \$53.00 **Best Seller**



10 MM

23 M (75 FT)

MBS: 16 kN (3597 lbf)
Weight: 3.63 lbs (1.656 kg)
Height: 6.00" 15.2 cm
Length: 13.00" (33 cm)
Width: 6.00" (15.2 cm)

KT36019 \$70.00



PMI® FINGERLESS BELAY GLOVES - WHITE/TAN

PMI's famous Rappel Glove, re-engineered. Fingerless design constructed of pliable goatskin and an extra layer of durable cowhide across the palm. Goatskin is used because it has a short break-in period and it also naturally contains lanolin which keeps the gloves supple. An original innovative designed leather pull tab between the fingers makes removal easy.

Key Features:

- Lightweight
- Soft leathers provide easy movement
- Fingers covered just enough for protection
- Quick removal

Material: . Goatskin and Cowhide

X-SMALL

Weight:..... 4.3 oz (121 g)
Circumference: 7.0"-7.5"

GL22401 \$36.50

MEDIUM

Weight:..... 4.7 oz (133 g)
Circumference: 8.0"-8.75"

GL22403 \$36.50

X-LARGE

Weight:..... 5.7 oz (162 g)
Circumference: 9.50"-10.50"

GL22405 \$36.50

SMALL

Weight:..... 4.7 oz (133 g)
Circumference: 7.5"-8.0"

GL22402 \$36.50

LARGE

Weight:..... 5.3 oz (150 g)
Circumference: 8.75"-9.50"

GL22404 \$36.50

GLOVE CINCH

Simply girth onto any gear loop or webbing strap to tightly secure gloves while not in use. Fits any size gloves.

Key Features:

- Made with PMI® Niteline for easy visibility in low light conditions or nighttime work
- Easy to use and attach

Weight:.....0.3 oz (9 g)

AC10014 \$5.20

Glove Name	Weight	Material	Circumference	Max Length
------------	--------	----------	---------------	------------

X-SMALL

Fingerless	4.3 oz (121 g)	Goatskin, Cowhide	7.0"-7.5"	
Rope Tech	7.9 oz (224 g)	Synthetic Leather, Cowhide	7.0"-7.5"	7.25"

SMALL

Fingerless	4.7 oz (133 g)	Goatskin, Cowhide	7.5"-8.0"	
Rope Tech	7.9 oz (224 g)	Synthetic Leather, Cowhide	7.5"-8.0"	7.5"
Lightweight Rappel	4.7 oz (133 g)	Goatskin, Cowhide	7.5"-8.0"	7.5"
Heavyweight	7.9 oz (224 g)	Cowhide	7.5"-8.0"	7.5"
Tactical	7.9 oz (224 g)	Cowhide	7.5"-8.0"	7.5"

MEDIUM

Fingerless	4.7 oz (133 g)	Goatskin, Cowhide	8.0"-8.75"	
Rope Tech	9.0 oz (255 g)	Synthetic Leather, Cowhide	8.0"-8.75"	7.75"
Lightweight Rappel	4.7 oz (133 g)	Goatskin, Cowhide	8.0"-8.75"	7.75"
Heavyweight	9.3 oz (264 g)	Cowhide	8.0"-8.75"	7.75"
Tactical	9.0 oz (225 g)	Cowhide	8.0"-8.75"	7.75"

LARGE

Fingerless	5.3 oz (150 g)	Goatskin, Cowhide	8.75"-9.50"	
Rope Tech	9.1 oz (258 g)	Synthetic Leather, Cowhide	8.75"-9.50"	8.0"
Lightweight Rappel	5.3 oz (150 g)	Goatskin, Cowhide	8.75"-9.50"	8.0"
Heavyweight	9.5 oz (269 g)	Cowhide	8.75"-9.50"	8.0"
Tactical	9.1 oz (258 g)	Cowhide	8.75"-9.50"	8.0"

X-LARGE

Fingerless	5.7 oz (162 g)	Goatskin, Cowhide	9.50"-10.50"	
Rope Tech	10.1 oz (286 g)	Synthetic Leather, Cowhide	9.50"-10.50"	8.25"
Lightweight Rappel	5.7 oz (162 g)	Goatskin, Cowhide	9.50"-10.50"	8.25"
Heavyweight	9.6 oz (272 g)	Cowhide	9.50"-10.50"	8.25"
Tactical	10.1 oz (286 g)	Cowhide	9.50"-10.50"	8.25"

XX-LARGE

Rope Tech	10.5 oz (298 g)	Synthetic Leather, Cowhide	10.50"-12.0"	8.50"
Lightweight Rappel	5.7 oz (162 g)	Goatskin, Cowhide	10.50"-12.0"	8.50"



PMI® ROPE TECH GLOVES – TAN

Hand protection and finger dexterity at its best. This ultra-lightweight design is great for belaying, knot tying and other rigging work. It is not suitable hand protection for fast rope or other body rappel techniques.



Key Features:

- Synthetic leather (palm base layer)
- Cowhide layer (finger wear points and palm)
- Ergonomically shaped for maximum protection and durability
- Two-Way stretch spandex on top and fingers for greater mobility and breathability
- Elastic cuff with pull-tab and Velcro® closure
- Carabiner loop stores inside for snag free operations

XX-SMALL

Weight:..... 7.9 oz (224 g)
Circumference: Up to 7.5"
Max Length: 7.0"

GL22300 \$42.00

X-SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.0"-7.5"
Max Length: 7.25"

GL22301 \$42.00

SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.5"-8.0"
Max Length: 7.5"

GL22302 \$42.00

MEDIUM

Weight:..... 9.0 oz (255 g)
Circumference: 8.0"-8.75"
Max Length: 7.75"

GL22303 \$42.00

LARGE

Weight:..... 9.1 oz (258 g)
Circumference: 8.75"-9.5"
Max Length: 8.0"

GL22304 \$42.00

X-LARGE

Weight:..... 10.1 oz (286 g)
Circumference: 9.5"-10.5"
Max Length: 8.25"

GL22305 \$42.00

XX-LARGE

Weight:..... 10.5 oz (298 g)
Circumference: ... 10.50"-12.00"
Max Length: 8.50"

GL22306 \$42.00

PMI® STEALTH TECH GLOVES – BLACK

An all black version of the PMI® Rope Tech Glove. Superior protection without the compromise of dexterity.



Key Features:

- Synthetic leather (palm base layer)
- Cowhide layer (finger wear points and palm)
- Ergonomically shaped for maximum protection and durability
- Two-Way stretch spandex on top and fingers for greater mobility and breathability
- Elastic cuff with pull-tab and Velcro closure
- Carabiner loop stores inside for snag free operations

Material: Synthetic Leather and Cowhide

X-SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.0"-7.5"
Max Length: 7.25"

GL22501 \$42.00

SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.5"-8.0"
Max Length: 7.5"

GL22502 \$42.00

MEDIUM

Weight:..... 9.0 oz (255 g)
Circumference: 8.0"-8.75"
Max Length: 7.75"

GL22503 \$42.00

LARGE

Weight:..... 9.1 oz (258 g)
Circumference: 8.75"-9.5"
Max Length: 8.0"

GL22504 \$42.00

X-LARGE

Weight:..... 10.1 oz (286 g)
Circumference: 9.5"-10.5"
Max Length: 8.25"

GL22505 \$42.00

XX-LARGE

Weight:..... 10.5 oz (298 g)
Circumference: 10.5"-12.0"
Max Length: 8.5"

GL22506 \$42.00



PMI® HEAVYWEIGHT GLOVES – TAN

Split cowhide offers more finger protection and wear resistance for rope work and rappelling. Two extra layers of cowhide protect the main wear area.

INDUSTRIAL RESCUE

Key Features:

- 3 layers of cowhide across the palm
- PMI® Heavyweight gloves have thicker layers of leather for added protection from abrasion and puncture

SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.5"–8.0"
Max Length: 7.5"

GL22100 \$36.00

MEDIUM

Weight:..... 9.3 oz (264 g)
Circumference: 8.0"–8.75"
Max Length: 7.75"

GL22101 \$36.00

LARGE

Weight:..... 9.5 oz (269 g)
Circumference: 8.75"–9.5"
Max Length: 8.0"

GL22102 \$36.00

X-LARGE

Weight:..... 9.6 oz (272 g)
Circumference: 9.5"–10.5"
Max Length: 8.25"

GL22103 \$36.00

PMI® TACTICAL GLOVES – BLACK

This all black version of the PMI® Heavyweight glove is very popular for tactical rope operations.

TACTICAL

INDUSTRIAL RESCUE

Key Features:

- All Black for Tactical operations
- 3 layers of cowhide across the palm
- PMI® Heavyweight gloves have thicker layers of leather for added protection from abrasion and puncture

Material: Cowhide

SMALL

Weight:..... 7.9 oz (224 g)
Circumference: 7.5"–8.0"
Max Length: 7.5"

GL22200 \$36.00

MEDIUM

Weight:..... 9.0 oz (255 g)
Circumference: 8.0"–8.75"
Max Length: 7.75"

GL22201 \$36.00

LARGE

Weight:..... 9.1 oz (258 g)
Circumference: 8.75"–9.5"
Max Length: 8.0"

GL22202 \$36.00

X-LARGE

Weight:..... 10.1 oz (286 g)
Circumference: 9.5"–10.5"
Max Length: 8.25"

GL22203 \$36.00



PMI® LIGHTWEIGHT RAPPEL GLOVES – WHITE/TAN

The original PMI rope work and rappel glove, still the most popular glove on the market. Lightweight, pliable goatskin provides excellent finger dexterity while two extra layers of cowhide across the palm maximize protection where you need it most.

Key Features:

- Soft leathers provide easy movement
- No exposed seams on the palm

Material: Goatskin and Cowhide

SMALL

Weight:..... 4.7 oz (133 g)
Circumference: 7.5"–8.0"
Max Length: 7.5"

GL22002 \$39.00

MEDIUM

Weight:..... 4.7 oz (133 g)
Circumference: 8.0"–8.75"
Max Length: 7.75"

GL22003 \$39.00

LARGE

Weight:..... 5.3 oz (150 g)
Circumference: 8.75"–9.5"
Max Length: 8.0"

GL22004 \$39.00

X-LARGE

Weight:..... 5.7 oz (162 g)
Circumference: 9.5"–10.5"
Max Length: 8.25"

GL22005 \$39.00

XX-LARGE

Weight:..... 5.7 oz (162 g)
Circumference: 10.5"–12"
Max Length: 8.5"

GL22006 \$39.00



PMI® Tactical Gloves – Black



PMI® AVATAR RADIO HARNESS

This simple and sleek harness is designed to attach to the Avatar Diamond chest harness, keeping your radio accessible and out of the way. This lightweight harness takes the place of an additional radio harness, making the setup more comfortable and breathable.

- Key Features:**
- Sleek and lightweight
 - Attaches to PMI® Avatar Diamond chest harness (not included)
- Weight:**.....2.4 oz (68 g)

Black ●
SG51189 \$26.00



PMI® RADIO HARNESS

An indispensable uniform component for any rescuer, the PMI® Radio Harness adjusts instantly to comfortably fit any size person. Radio compartment also adjusts to fit all models of radios, old or new, and keeps antenna upright for optimum performance.

- FIRE RESCUE
- ROPE RESCUE
- WILDERNESS RESCUE
- INDUSTRIAL RESCUE

- Key Features:**
- Large capacity bellows cargo pouch
 - Pen pocket
 - Twin antenna keepers
 - Cordura® construction

Weight:..... 9.5 oz (269 g)

Black ●
SG51001 \$59.00

PMI® STEALTH RADIO HARNESS

You won't even know you are wearing the Stealth Radio Harness. The no-bulk design stores all of your gear while maintaining a snug fit.

- FIRE RESCUE
- TACTICAL
- WILDERNESS RESCUE
- INDUSTRIAL RESCUE
- ROPE RESCUE

- Key Features:**
- Antenna keeper
 - Large pocket w/Velcro closure
 - Pen pocket
 - Side grommets for adjustable lanyard
 - Adjustable radio pocket
 - GPS/cell phone pocket
 - Reflective tabs
 - 1 snap lock buckle for an easy fit
 - 4 small adjustable buckles

Weight:..... 6.4 oz (181 g) **Torso Strap:**...48" circumference
..... (stretchy elastic)

Black ●
SG51185 \$55.00



PMI® UNIFORM BELT MADE IN THE USA

PMI's Uniform Belt comes in two different versions. The Basic model is one size fits most and can be trimmed by the user to fit. The second version has hook and loop tape to fasten down the free tail of the belt and is available in two size ranges. Not intended as an emergency harness, but as a backup or "last resort". Made of 1 3/4" black webbing with a 7000 lbf MBS.



STANDARD

Waist:.....up to 48" Weight:..... 9.0 oz (255 g)

Black ●
SG51039 \$43.25



PMI® CRAWLER ELBOW PADS MADE IN THE USA

These elbow pads are rugged while being comfortable enough to wear even against bare skin. Cut out flexion points won't bind or pinch.



• Measured around bicep with clothes

X-SMALL 6"– 10"

Weight:..... 6.4 oz (181 g)
Length:..... 11" (27,9 cm)

SG51179 \$32.00

SMALL 8"–12"

Weight:..... 6.4 oz (181 g)
Length:..... 11" (27,9 cm)

SG51176 \$32.00

MEDIUM 11"–15"

Weight:..... 7.2 oz (204 g)
Length:..... 11" (27,9 cm)

SG51177 \$32.00

LARGE 13"–18"

Weight:..... 7.2 oz (204 g)
Length:..... 11" (27,9 cm)

SG51178 \$32.00



HOOK & LOOP MADE IN THE USA

Similar features as our basic uniform belt, but the hook and loop fastener holds the free end of the webbing against belt.

STANDARD

Waist:.....27"–40"
Weight:..... 9.5 oz (269 g)

Black ●
SG51139 \$47.25

LARGE

Waist:.....36"–56"
Weight:..... 10.5 oz (298 g)

Black ●
SG51140 \$48.00



PMI® CRAWLER KNEE PADS MADE IN THE USA

The toughest knee pads you'll ever wear. Made from Cordura® packcloth and Neoprene padding, they are comfortable enough to wear all day but sturdy enough for the dirtiest job.



Key Features:

- Supplex nylon back
- Tabbed webbing for a secure fit

Length:.....17.00" (43.2 cm) Weight:..... 12.3 oz (349 g)

SG51130 \$51.50

HARDWARE

Just as rope provides the foundation of your system, hardware drives the functionality. PMI selects the finest tools available, balancing the qualities of innovative design with reliability, and long term durability. Our commitment to relationships with quality manufacturers like SMC, ISC, Pensafe, and Climbing Technologies are based on their commitment to the industry and, ultimately, to your safety. When you choose hardware from PMI, you are choosing the best.

CARABINER SELECTION

Find the right carabiner that meets all of your work and rescue specifications.

Carabiner	Rope Rescue	Conf. Space	Fire Rescue	Wild. Rescue	Rope Access	Tower Work	Utilities Safety	Fall Protec.	Rec. Climbing	Rec. Caving	Cave Rescue	Arborist	Challenge Course	Page
PMI Paragon Auto Lock	●			●	●				●	●	●	●	●	72
PMI Paragon Twist Lock	●			●	●				●	●	●	●		72
PMI Prosaic	●			●	●				●	●	●	●	●	72
SMC Lite Steel	●	●	●	●	●					●	●		●	67
SMC ANSI Safety Lock	●					●	●	●					●	66
SMC Autolocking Lite Steel	●	●	●										●	66
SMC FP Lite	●				●	●	●	●				●		65
SMC Kinetic	●	●		●	●				●	●	●	●	●	68
SMC Mountain D, Non-Locking	●			●					●	●				69
SMC Aluminum Locking D	●	●		●	●				●	●	●	●		67
SMC Oval, Non-Locking	●								●	●				69
SMC CrossOver	●		●	●	●			●				●		65
SMC Large Steel Locking	●	●	●	●				●			●			66
SMC Large D, Aluminum	●	●	●	●					●	●	●	●		68
Pensafe KwikLock	●	●	●		●	●	●	●				●	●	69
Pensafe LockSafe	●	●	●		●	●	●	●					●	69

SMC CROSSOVER SERIES



These carabiners feature a new ergonomic single hand frame geometry allowing easy single hand operations. The CrossOvers have been specifically designed to meet all your work environment safety needs. Easy to use Dual or Triple Auto-Locking sleeves allow for single hand operations while working in mission critical environments. A traditional Screw-Lock version is also available.

- ARBORIST**
- ROPE RESCUE**
- ROPE ACCESS**
- FIRE RESCUE**

Key Features:

- Choice of three gate options
- Lightweight design
- New frame and gate design
- Dual-Lock and Tri-Lock versions meet ANSI Z359.1

Width:.....3.35" (8.5 cm) **Minor Axis MBS:**16 kN (3600 lbf)
Length:.....5.53" (14.0 cm) **Gate Open MBS:**18 kN (4046 lbf)
Major Axis MBS:40 kN (8992 lbf) **Gate Opening:**... 1.00" (25.4 mm)

TRI-LOCK

Weight:.....5,5 oz (156 g)

Blue ● SM205700N \$39.00
 Black ● SM205707N \$39.00

DUAL-LOCK

Weight:.....5,5 oz (156 g)

Blue ● SM205600N \$39.00
 Black ● SM205607N \$39.00

BERRY COMPLIANT

COMPLIANT:NFPA 1983, G (2017)

BERRY COMPLIANT

COMPLIANT:NFPA 1983, G (2017)

SCREW-LOCK

Weight:..... 5.1 oz (145 g)

Blue ● SM205500N \$36.00 Black ● SM205507N \$36.00

BERRY COMPLIANT

COMPLIANT:NFPA 1983, G (2017)

SMC FP LITE ALLOY



The SMC FP Lite Alloy has been specifically designed for all your fall protection needs. Built from the ground up giving you the best of the best in carabiner functionality, the FP features an easy opening Auto Locking gate. You don't have to sacrifice strength for weight when working at height all day long.

- FALL PROTECTION**
- ROPES COURSE**
- UTILITIES SAFETY**
- ROPE ACCESS**
- TOWER WORK**
- ROPE RESCUE**

Width:.....2.91" (7.1 cm) **Major Axis MBS:**45 kN (10116 lbf)
Length:.....4.61" (11.7 cm) **Minor Axis MBS:**16 kN (3600 lbf)
Height:..... 0.80" (2 cm) **Gate Open MBS:**11 kN (2473 lbf)
Weight:..... 9.0 oz (255 g) **Gate Opening:**.... 1.0" (25.4 mm)

Bright SM102100 \$36.00 **Best Seller**

BERRY COMPLIANT

COMPLIANT: NFPA 1983





SMC AUTO-LOCKING LITE ALLOY STEEL



A Lite Alloy steel carabiner featuring double or triple action gates. Easily opened with one hand, but once released, the gate closes to a fully locked position. The carabiner gate and sleeve are stainless steel for problem-free operation. An offset "D" shape provides a smooth transfer of the Munter hitch when used as a belay and has ample volume to clip in large diameter ropes and over the rails of most litters.

- FIRE RESCUE
- CONFINED SPACE
- ROPE RESCUE

Key Features:

- Lite Alloy Steel Body
- Stainless Steel spring, pin, and sleeve

Width:.....2.76" (7.0 cm)
Length:.....4.52" (11.5 cm)
Weight:..... 7.0 oz (199 g)
Major Axis MBS:.....45 kN
 (10116 lbf)
Minor Axis MBS:12 kN (2697 lbf)
Gate Open MBS:11 kN (2473 lbf)
Gate Opening:.. 0.88" (22.4 mm)

DUALGUARD

SM102200N \$44.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983, G (2017)

TRIGUARD

SM102300N \$44.00



SMC ANSI SAFETY LOCK

The SMC ANSI Safety Lock is manufactured using High Strength Zinc Plated Alloy Steel to maximize the strength to weight ratio and is ideal for any situation where security is critical. Locking the sleeve on the gate rather than the body of the carabiner provides greater overall strength and smooth action.

- FALL PROTECTION
- TOWER WORK
- ROPE RESCUE
- ROPE ACCESS
- UTILITIES SAFETY

Width:.....2.97" (7.5 cm)
Length:..... 5.04" (12.8 cm)
Weight:..... 11.5 oz (325 g)
Major Axis MBS:46 kN (10341 lbf)
Minor Axis MBS:16 kN (3600 lbf)
Gate Open MBS:11 kN (2473 lbf)
Gate Opening:.. 1.20" (30.5 mm)

SM21501 \$59.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983, ANSI Z359.12 (2009)



SMC LARGE STEEL



Large size locking carabiners developed by SMC especially for the needs of the fire and rescue communities. Available in several different metal finishes, as well as in both NFPA (Class G) and non-NFPA versions. Black zinc coated models are ideal for tactical operations and stainless steel model is best for corrosive environments. Large gate opening fits easily over litter rails. All models have stainless gates and locking sleeves for greater strength and reliability.

- CONFINED SPACE
- FIRE RESCUE
- ROPE RESCUE

Key Features:

- Original US made steel rescue carabiner
- Large gate opening
- Stainless steel gate and sleeve

NFPA VERSIONS

Width:.....2.97" (7.5 cm)
Length:..... 5.04" (12.8 cm)
Weight:..... 10.6 oz (300 g)
Major Axis MBS:46 kN (10341 lbf)
Minor Axis MBS:16 kN (3600 lbf)
Gate Open MBS:11 kN (2473 lbf)
Gate Opening:.. 1.20" (30.5 mm)

NFPA ZINC

Plated Steel
 SM21001N \$39.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983, G (2017)

NFPA BLACK

Zinc Plated Steel
 SM21007N \$45.00

NFPA – HEAT TREATED

Width:.....2.97" (7.5 cm)
Length:..... 5.04" (12.8 cm)
Weight:..... 10.6 oz (300 g)
Major Axis MBS:65 kN (14613lbf)
Minor Axis MBS:16 kN (3600 lbf)
Gate Open MBS:18 kN (4046 lbf)
Gate Opening:.. 1.20" (30.5 mm)

Treated Steel ●
 SM21002 \$49.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983

STANDARD

Width:.....2.97" (7.5 cm)
Length:..... 5.04" (12.8 cm)
Weight:..... 10.9 oz (309 g)
Major Axis MBS:.....46 kN
Minor Axis MBS:18 kN (4046 lbf)
Gate Open MBS:11 kN (2473 lbf)
Gate Opening:.. 1.20" (30.5 mm)

Stainless Steel Black Stainless Steel
 Natural Black
 SM24001 \$61.00 SM24007 \$66.00

BERRY COMPLIANT



SMC LITE STEEL

SMC Lite Steel locking carabiners are for those situations where the high strength and durability of SMC Steel Carabiners is desired but the size and weight is not. Increasingly popular among cave and mountain rescuers for providing most of the benefits without the weight and bulk typically associated with steel biners.

- CONFINED SPACE**
- FIRE RESCUE**
- ROPE RESCUE**

Key Features:

- Stainless steel model available
- Stainless steel gate and sleeve

STANDARD

STAINLESS STEEL

Width:.....2.70" (6.9 cm)
 Length:.....4.52" (11.5 cm)
 Weight:.....6.0 oz (170 g)
Major Axis MBS:33 kN (7418 lbf)
Minor Axis MBS:10 kN (2248 lbf)
Gate Open MBS: 8 kN (1798 lbf)
Gate Opening: .. 0.94" (23.9 mm)

Stainless ●
 SM100003 \$44.00

Black ●
 SM100007 \$51.50

NFPA VERSIONS

LITE ALLOY STEEL

Width:.....2.76" (7.0 cm)
 Length:.....4.52" (11.5 cm)
 Weight:.....6.6 oz (187 g)
Major Axis MBS:.....45 kN (10116 lbf)
Minor Axis MBS:12 kN (2697 lbf)
Gate Open MBS:11 kN (2473 lbf)
Gate Opening: .. 0.94" (23.9 mm)

Bright ●
 SM100001N \$39.00

Black ●
 SM100007N \$42.00

BERRY COMPLIANT



BERRY COMPLIANT

COMPLIANT: NFPA 1983, G (2017)



SMC EXTRA LARGE STEEL

Offset "D" shape fits easily over a standard 1.25" ladder rung, making this carabiner an indispensable tool for the rescue professional. This product is more suited for extra wide clipping than for tight rigging.

- CONFINED SPACE**
- FIRE RESCUE**
- ROPE RESCUE**

Key Features:

- Stainless steel gate and sleeve
- Material Zinc Plated Steel
- Finish Zinc Plated

Width:.....3.50" (8.9 cm)
 Length:.....5.70" (14.5 cm)
 Weight:.....12.2 oz (346 g)

Major Axis MBS:54 kN (12139 lbf)
Minor Axis MBS:13 kN (2922 lbf)
Gate Open MBS:14 kN (3147 lbf)
Gate Opening: .. 1.45" (36.0 mm)

Bright ●
 SM20003N \$47.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983, G (2017)



SMC ALUMINUM

LOCKING D

This carabiner sets the standard in climbing, mountaineering, and rescue applications. Extremely lightweight, it offers high strength and a large gate opening for functional versatility. The locking sleeve engages the gate rather than the frame to prevent jamming.

- CAVE RESCUE**
- WILDERNESS RESCUE**
- RECREATIONAL CAVING**
- FIRE RESCUE**
- OUTDOOR CLIMBING**
- ROPE RESCUE**

Key Features:

- Modified "D" shape
- Locking screw gate
- Aluminum
- Stainless steel springs and pins
- NFPA 1983 models available

STANDARD

Width:.....2.56" (6.5 cm)
 Length:.....4.37" (11.1 cm)
 Weight:.....2.6 oz (74 g)

Bright ●
 SM18501 \$18.95

Black ●
 SM18502 \$20.95

Red ●
 SM18505 \$19.95

Major Axis MBS:27 kN (6070 lbf)
Minor Axis MBS: 7 kN (1574 lbf)
Gate Open MBS: 7 kN (1574 lbf)
Gate Opening: .. 0.82" (20.8 mm)

BERRY COMPLIANT

NFPA VERSIONS

Width:.....2.56" (6.5 cm)
 Length:.....4.37" (11.1 cm)
 Weight:.....2.6 oz (74 g)

Bright ●
 SM18501N \$22.00

Black ●
 SM18502N \$24.00

Red ●
 SM18505N \$24.00

Major Axis MBS:27 kN (6070 lbf)
Minor Axis MBS: 7 kN (1574 lbf)
Gate Open MBS: 7 kN (1574 lbf)
Gate Opening: .. 0.82" (20.8 mm)

BERRY COMPLIANT

COMPLIANT: NFPA 1983



SMC LARGE D

ALUMINUM **MADE IN THE USA**



Specially designed for rescue work, the large "D" fits easily over litter rails and has the strength to hold up to any job.

FIRE RESCUE **ROPE RESCUE** **WILDERNESS RESCUE**

Width:.....2.97" (7.5 cm) **Minor Axis MBS:**11 kN (2473 lbf)
Length:.....5.04" (12.8 cm) **Gate Open MBS:**10 kN (2248 lbf)
Weight:..... 3.8 oz (108 g) **Gate Opening:** .. 1.20" (30.5 mm)
Major Axis MBS:34 kN (7643 lbf)

Bright ● Black ●
 SM25001 \$37.50 SM25002 \$42.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983, T (2017)



SMC CARABINER CAPTIVE

EYE CLIP **MADE IN THE USA**



Turn any SMC carabiner into a Captive Eye carabiner. Made from strong stainless steel, the SMC Captive Eye Wire Keeper, when installed correctly will hold your rope in place on the carabiner. Comes in two sizes to fit any SMC Carabiner.

Note: Small Clip fits all SMC Standard Aluminum, Lite Alloy, Lite Steel series carabiners. Large Clip fits all SMC Large Aluminum, Large Stainless Steel and Large Steel series carabiners

Material:Stainless Steel

Small Large
 SM11803 \$3.50 SM11804 \$3.50

BERRY COMPLIANT



SMC KINETIC SERIES

MADE IN THE USA



The SMC Kinetic Series has been specifically designed to meet all your personal protection requirements. Built from the ground up this carabiner gives you the best of the best in carabiner functionality. The Kinetic Series features a key lock nose, 0.98" gate opening, and screw or Auto-Locking gates. Weighing in at 2.8 oz. (Screw Gate) and 3.2 oz. (Twist Gate) you don't have to sacrifice strength for weight when working at height all day long.

FIRE RESCUE **ROPES COURSE** **WILDERNESS RESCUE**
ROPE RESCUE

Key Features:

- Lightweight
- Single hand operation
- Bright easy to see color
- NFPA certified

SCREW LOCK

Width:.....2.83" (7.2 cm) **Minor Axis MBS:** 9 kN (2023 lbf)
Length:.....4.57" (11.6 cm) **Gate Open MBS:** 8 kN (1798 lbf)
Weight:.....2.8 oz (79 g) **Gate Opening:** 1.0" (25.4 mm)
Major Axis MBS:28 kN (6294 lbf)

Blue ● Orange ● Black ●
 SM103000N \$19.95 SM103004N \$19.95 SM103007N \$19.95

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), T

TWIST-LOCK

Width:.....2.85" (7.2 cm) **Minor Axis MBS:** 9 kN (2023 lbf)
Length:.....4.57" (11.6 cm) **Gate Open MBS:** 8 kN (1798 lbf)
Weight:.....3.2 oz (91 g) **Gate Opening:** .. 0.98" (24.9 mm)
Major Axis MBS:28 kN (6294 lbf)

Blue ● Orange ● Black ●
 SM103100N \$22.00 SM103104N \$22.00 SM103107N \$22.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2012)



SMC MOUNTAIN D MADE IN THE USA

This easy handling carabiner is a must for all around use. Large enough to organize and manage your rigging.

OUTDOOR CLIMBING **RECREATIONAL CAVING**

Key Features:

- Aluminum
- Non-Locking
- Available in 5 colors

Width:.....2.56" (6.5 cm) **Major Axis MBS:**27 kN (6070 lbf)
Length:.....4.37" (11.1 cm) **Minor Axis MBS:** 7 kN (1574 lbf)
Weight:.....2.4 oz (68 g) **Gate Open MBS:** 7 kN (1574 lbf)
Gate Opening: .. 0.95" (24.1 mm)

Bright ● Black ● Purple ● Orange ●
 SM18001 \$14.50 SM18002 \$18.50 SM18003 \$18.50 SM18004 \$18.50

Red ●
 SM18005 \$18.50

BERRY COMPLIANT



PENSAFE A333PS KWIKLOCK

This auto-locking carabiner with lightweight offset-D aluminum is ideal for a variety of rigging applications.

GLOBAL **ROPE RESCUE** **RECREATIONAL CAVING**
OUTDOOR CLIMBING **ROPE ACCESS**

Key Features:

- Ideal for use with munter or clove hitch
- I-Beam construction
- Material Aluminum
- Excellent strength-to-weight ratio
- Double-action gate

Width:.....2.61" (6.6 cm) **Major Axis MBS:**30 kN (6730 lbf)
Length:.....4.46" (11.3 cm) **Minor Axis MBS:**16 kN (3600 lbf)
Weight:.....3.5 oz (99 g) **Gate Opening:** .. 0.65" (16.5 mm)

Grey/Green ●
 HD26274 \$28.00

COMPLIANT: NFPA 1983 (2017), G ANSI Z359.12 (2009) CSA Z259.12 (2016)



SMC OVAL MADE IN THE USA

Keep your gear in order with the traditional SMC Oval. A traditional biner, an excellent choice.

OUTDOOR CLIMBING **RECREATIONAL CAVING**

Key Features:

- Aluminum
- Non-Locking

Width:.....2.21" (5.6 cm) **Major Axis MBS:**20 kN (4496 lbf)
Length:.....4.26" (10.8 cm) **Minor Axis MBS:** 7 kN (1574 lbf)
Weight:.....2.2 oz (63 g) **Gate Open MBS:** 6 kN (1349 lbf)
Gate Opening: .. 0.71" (18.0 mm)

Bright ● Black ●
 SM19001 \$8.50 SM19002 \$10.50

BERRY COMPLIANT



PENSAFE A847PS LOCKSAFE

This offset-D aluminum carabiner features an extra-large internal volume and gate clearance, making it ideal for rope access and other rigging applications.

GLOBAL **ROPE RESCUE** **ROPE ACCESS**
FALL PROTECTION

Key Features:

- Ideal for use with munter or clove hitch
- Material Aluminum
- I-Beam Construction
- Triple-action gate

Width:.....3.03" (7.7 cm) **Major Axis MBS:**30 kN (6744 lbf)
Length:.....4.62" (11.7 cm) **Minor Axis MBS:**16 kN (3600 lbf)
Weight:.....4.1 oz (116 g) **Gate Opening:** .. 0.81" (20.6 mm)

Grey/Gold ●
 HD26275 \$30.00

COMPLIANT: ANSI Z359.12 (2009) CSA Z259.12 (2016)



SMC LIGHT D



There's nothing better than a symmetrical carabiner for rigging pulleys in haul systems, and with other components that feature a swiveling side plate. This full strength oval carabiner keeps things smooth with a keylock nose, and offers ultimate security with it's triple action locking gate.



Key Features:

- Aluminum
- Non-Locking
- Available in 5 colors

Width:.....2.21" (5.6 cm)

Length:.....3.96" (10.1 cm)

Weight:.....1.7 oz (48 g)

MBS: 20 kN 4496 lbf

Major Axis MBS:20 kN (4496 lbf)

Minor Axis MBS: 8 kN (1800 lbf)

Gate Open MBS: 5 kN (1124 lbf)

Gate Opening: .. 0.74" (18.8 mm)

Black ●
SM17002 \$13.50

BERRY COMPLIANT



ISC ALUMINUM WIZARD KARABINER



The "Wizard" range represents the strongest carabiners we manufacture in both Steel & Aluminium, with minimum breaking strengths (MBS) ranging from 40kN to 70kN. The Aluminium Wizard is a high strength, light-weight Carabiner. Its shape is designed to bias the load towards the spine- the strongest part of the Carabiner. The Aluminium Wizard has a blind nose, to help to reduce snagging. Available in standard (CE & NFPA G) Screwgate, Twistlock & Supersafe models, or ANSI (Z359.12) compliant Twistlock & Supersafe versions.



Key Features:

- Aluminum (Anodized)

Width:.....73 mm (2 7/8")

Height:128 mm (5")

Weight:.....113 g (4 oz)

Gate Opening: ... 29 mm (1 1/8")

SCREWGATE

Bright ●
HD26302 \$26.63

COMPLIANT: CE EN 362:04B MEETS: NFPA1983 (17ED)G

TWISTLOCK

Bright ●
HD26301 \$28.25



ISC ALUMINUM WIZARD KARABINER ANSI SUPERSAFE MADE IN THE USA

The "Wizard" range represents the strongest carabiners we manufacture in both Steel & Aluminium, with minimum breaking strengths (MBS) ranging from 40kN to 70kN. The Aluminium Wizard is a high strength, light-weight Carabiner. Its shape is designed to bias the load towards the spine- the strongest part of the Carabiner. The Aluminium Wizard has a blind nose, to help to reduce snagging. Available in standard (CE & NFPA G) Screwgate, Twistlock & Supersafe models, or ANSI (Z359.12) compliant Twistlock & Supersafe versions.



Key Features:

- Aluminum (Anodized)

Width:..... 73 mm (2 7/8") **Weight:**..... 240 g (5.5 oz)
Height:128 mm (5") **Gate Opening:** . 27 mm (1 1/16")

SUPERSAFE

Bright ●
 HD26304 \$35.47

COMPLIANT: CE EN 362:04B MEETS: NFPA1983 (17ED)G



ISC ALUMINUM WIZARD KARABINER ANSI SUPERSAFE MADE IN THE USA

The "Wizard" range represents the strongest carabiners we manufacture in both Steel & Aluminium, with minimum breaking strengths (MBS) ranging from 40kN to 70kN. The ISC Aluminum Wizard Karabiner ANSI Twistlock is a high strength, light-weight Carabiner. Its shape is designed to bias the load towards the spine- the strongest part of the Carabiner. The ISC Aluminum Wizard Karabiner ANSI Twistlock has a blind nose, to help to reduce snagging. Available in standard (CE & NFPA G) Screwgate, Twistlock & Supersafe models, or ANSI (Z359.12) compliant Twistlock & Supersafe versions.



Key Features:

- Aluminum (Anodized)

Width:..... 73 mm (2 7/8") **Weight:**..... 240 g (5.5 oz)
Height:128 mm (5") **Gate Opening:** . 27 mm (1 1/16")

TWISTLOCK

Bright ●
 HD26311 \$33.06

COMPLIANT: CE EN 362:04B MEETS: NFPA1983 (17ED)G



PMI® PROSAIC

There's nothing better than a symmetrical carabiner for rigging pulleys in haul systems, and with other components that feature a swiveling side plate. This full strength oval carabiner keeps things smooth with a keylock nose, and offers ultimate security with its triple action locking gate.



Key Features:

- Keylock design
- Material Aluminum
- Triple action locking gate

Width:.....2.40" (6.1 cm)

Length:.....4.33" (11.0 cm)

Weight:.....2.9 oz (82 g)

Major Axis MBS:22 kN (5000 lbf)

Minor Axis MBS: 8 kN (1798 lbf)

Gate Open MBS: 8 kN (1798 lbf)

Gate Opening: .. 0.67" (17.0 mm)

Silver/Green ●
HD26259 \$18.00

COMPLIANT: UIAA CE EN 362-B, EN 12275



PMI® PARAGON TWIST-LOCK

The ergonomic shape of this aluminum screw gate connector fits nicely in the hand and is easy to open. The wide gate opening and maximum capacity loading area make this a great all-around carabiner.



Key Features:

- Works well with munter hitch or clove hitch
- Generous loading surface
- Ergonomic shape
- Manually-locking gate
- Material Aluminum

Width:.....2.60" (6.6 cm)

Length:.....4.21" (10.7 cm)

Weight:.....2.3 oz (65 g)

Major Axis MBS:26 kN (5845 lbf)

Minor Axis MBS: 8 kN (1798 lbf)

Gate Open MBS: 6 kN (1349 lbf)

Gate Opening: .. 0.81" (20.7 mm)

Grey/Green ●
HD26258 \$15.95

COMPLIANT: UIAA CE EN 362-B, EN 12275



PMI® PARAGON AUTO-LOCK

The ergonomic shape of this auto-locking connector offers a wide gate opening and offers maximum capacity in the loading area, while the autolocking gate maintains maximum security.



Key Features:

- Works well with munter hitch or clove hitch
- Generous loading surface
- Ergonomic shape
- Auto-locking gate
- Material Aluminum

Width:.....2.60" (6.6 cm)

Length:.....4.21" (10.7 cm)

Weight:.....2.3 oz (65 g)

Major Axis MBS:26 kN (5845 lbf)

Minor Axis MBS: 8 kN (1798 lbf)

Gate Open MBS: 6 kN (1349 lbf)

Gate Opening: .. 0.81" (20.7 mm)

Grey/Green ●
HD26257 \$16.95

COMPLIANT: UIAA CE EN 362-B, EN 12275

COMPLIANCE

Compliance is important: that's why PMI strives to offer products to meet existing NFPA, ANSI, CE, and other standards.

For those working in industrial fall protection, we offer a variety of harnesses, helmets and connectors that are compliant to ANSI standards.

For the professional rescuer, NFPA certification is of course the way to go. And for global certification, CE labeled products would likely meet your needs. Remember to always consult with the certification organization that is most applicable to both your industry and the location where you are rescuing/working.

GATES

Carabiner gates are available in Non-Locking, Manual Locking, and Auto-Locking varieties.

Non-Locking close with a simple spring action and can easily be opened with just a push against the hinged gates. They are NOT recommended for critical application use.

Manual Locking are most often locked with a screw gate sleeve. It requires the user to screw the sleeve closed to lock the gate which then prevents the gate from swinging open accidentally pressed on.

Auto-Locking gates have a spring loaded locking sleeve that turns into place once the gate swings shut. There are two common styles, one that simply twists the sleeve to unlock and then the gate can swing open. The other style requires 3 steps to lift up or pull down on the locking sleeve prior to twisting it to the unlocked position allowing the gate to be swung open.



SCREW LINKS

Screw links stand up to multi-directional forces better than carabiners and allow ample room for multiple pieces of gear to be attached. Ideal harness attachment in ascending systems or for joining anchor straps.



Note: Links are stamped with a Working Load Limit (WLL) that is about 1/5 of its rated breaking strength.

DELTA

7 MM

Height: 0.28" (7.0 mm)
Width: 2.0" (5.1 cm)
Length: 2.48" (6.3 cm)
WLL: 4 kN (880 lbf)

Gate Opening: .. 1 1/32" (8.5 mm)
MBS: 20 kN (4400 lbf)
Weight: 2.0 oz (58 g)
Major axis: 20 kN (4400 lbf)

Galvanized Steel
 HD26079 \$8.24

10 MM

Height: 0.44" (10.0 mm)
Width: 2.61" (6.6 cm)
Gate Opening: 15/32" (12.0 mm)
Length: 3.42" (8.7 cm)

MBS: 17 kN (3860 lbf)
Weight: 2.0 oz (55 g)
WLL: 3 kN (770 lbf)
Major axis: 17 kN (3860 lbf)

MBS: 42 kN (9525 lbf)
Weight: 5.0 oz (153 g)
WLL: 9 kN (1985 lbf)
Major axis: 42 kN (9525 lbf)

Aluminum
 HD26023 \$27.71

Galvanized Steel
 HD26044 \$12.67

HALF-MOON

10 MM

Height: 0.44" (10.0 mm)
Width: 2.75" (7.0 cm)
Length: 3.39" (8.6 cm)

Gate Opening: 13/32" (10.0 mm)
MBS: 44 kN (9920 lbf)
Weight: 5.0 oz (153 g)
Major axis: 44 kN (9920 lbf)

Galvanized Steel
 HD26061 \$19.26

COMPLIANT: UIAA CE EN 362, EN 12275

OVAL

5 MM

Height: 0.19" (5.0 mm)
Width: 1.0" (2.5 cm)
Length: 1.95" (4.9 cm)
Gate Opening: 1/4" (6.5 mm)
MBS: 22 kN (5000 lbf)
Weight: 1.0 oz (21 g)
Major axis: **22 kN (5000 lbf)**
WLL: 4 kN (990 lbf)

Stainless Steel
 HD26150 \$14.32

10 MM

Height: 0.44" (10.0 mm)
Width: 1.75" (4.4 cm)
Length: 3.50" (8.9 cm)
Gate Opening: 15.32" (12.0 mm)
MBS: 54 kN (12125 lbf)
Weight: 5.0 oz (137 g)
Major axis: 54 kN (12125 lbf)
WLL: 11 kN (2425 lbf)

Galvanized Steel
 HD26022 \$12.46

COMPLIANT: UIAA CE EN 362, EN 12275

7 MM

Height: 0.28" (7.0 mm)
Width: 1.25" (3.2 cm)
Length: 2.61" (6.6 cm)
Gate Opening: .. 1 1/32" (8.5 mm)
MBS: 27 kN (6050 lbf)
Weight: 2.0 oz (51 g)
Major axis: **27 kN (6050 lbf)**
WLL: 5 kN (1210 lbf)

Galvanized Steel
 HD26045 \$7.83



PMI®/SMC GRIP MADE IN THE USA

This rope grab is a solid, compact performer that can be used as a ratchet or to grip a kernmantle rope whenever reliability and care are priorities. The compact curved body is easy to grip, and the secure, user friendly release mechanism makes putting this rope grab onto any rope - loaded or unloaded – a breeze. A specially designed cam protects your rope in the event of unexpected loading, but this unit is not designed as a belay or fall protection device.

- ARBORIST
- ROPE ACCESS
- CAVE RESCUE
- ROPE RESCUE
- FIRE RESCUE

Key Features:

- Ropes up to 13 mm
- Compact
- Anodized aluminum

Height:2.90" (7.4 cm) **Weight:**..... 6.7 oz (190 g)
Width:.....1.85" (4.7 cm) **MBS:** 5 kN (1124 lbf)
Length:.....3.87" (9.8 cm) **Sizing Info:**10–13 mm rope

Gold ●
 SM220500N \$79.00

COMPLIANT: NFPA 1983 (2017), T



ISC
 Solutions in Metal

ISC MINI ROPEGRAB MADE IN THE USA

The ISC Mini Ropegrab (10.5 mm to 13 mm rope) is fitted with a pip-pin axle, making it quick and easy to attach/detach mid-line. A thumb operated push-button is used to disengage the Pip-pin mechanism and the axle has a chamfered end, to allow for easy location of the pin. The ISC Mini Ropegrab model has a textile Pip-pin retention cord, (rather than a wire cord). The textile cord allows for easy maneuvering of the pin and does not snag, or wear with sharp edges.

- ARBORIST
- ROPE ACCESS
- CAVE RESCUE
- ROPE RESCUE
- FIRE RESCUE

Key Features:

- Ropes up to 13 mm
- Compact
- Anodized aluminum

Height:85 mm (3 11/32") **Weight:**..... 180 g (6oz)
Width:..... 65 mm (2 9/16") **MBS:**Dependent on rop
Pip-pin Length:62 mm (2 7/16") **Sizing Info:** 10.5–13 mm
(3/8–1/2")

Red ●
 HD26312 \$93.05

COMPLIANT: EN353-2



CT EASY MOVE



This lightweight Rope-Access Backup device is designed for maximum performance in the most demanding rope access environments. Certified to EN 353-2:2002 as a guided type fall arrester for flexible lifeline, as well as EN 12841:2006-A/B for rope access systems.

- GLOBAL
- ROPE ACCESS
- ROPES COURSE

Key Features:

- Lightweight
- Easy to place on and off rope
- Grips well on dirty or icy ropes
- Locking mechanism for stationary working

Weight:..... 5.0 oz (140g) **Sizing Info:**.....10.5–11 mm rope

HD26251 \$119.06

MIO ROPE GRAB

This highly effective self-trailing rope grab grips automatically in the event of a fall and dissipates the energy of the fall by slipping along the rope. When used within OSHA guidelines on approved ropes, the amount of slip is well within the OSHA requirements. Comes with lanyard and ANSI Snap Hook.

- UTILITIES SAFETY
- ROPE ACCESS
- TOWER WORK
- FALL PROTECTION
- ROPES COURSE

Key Features:

- Meets ANSI requirements
- Used for fall arrest
- Approved and tested with PMI® Classic Static
- Removable dual action pin for easy placement on rope
- Stainless steel
- Self-trailing

Height:2.75" (7.0 cm) **Length:**.....4.25" (10.8 cm)
Width:.....5.25" (13.3 cm) **Weight:**..... 1.38 oz (626 g)

1/2" ROPE

Blue ●
 HD26005 \$217.00

7/16" ROPE

Yellow ●
 HD26114 \$217.00 **Special Order**

COMPLIANT: EN 12278:2007 | EN 567:1997 | ANSI Z359.1 (2007)
 EN 353-2:2002, EN 12841:2006-A/B



CT QUICK ROLL

New ergonomic handle ascender, for greater efficiency when pulling. Cam opening lever usable with one hand. Steel cam, resists wear and tear.



RIGHT

HD26281 \$112.00

LEFT

HD26280 \$112.00



CT QUICK-UP HANDLED ASCENDERS

Left or right-hand light alloy ascender handle with ergonomic rubber grip for climbing ropes.



Key Features:

- Ergonomic grip with finger support
- Patented, one-handed cam release mechanism
- Durable steel cam with effective, non-destructive teeth
- Holes in frame accommodate multiple attachments, anti-inversion system

Weight:..... 7.6 oz (215 g)

Sizing Info: ..8 mm - 13 mm rope

RIGHT HAND

HD26255 \$72.00

LEFT HAND

HD26256 \$72.00

COMPLIANT: UIAA CE EN 567, EN 12841-B



CT SIMPLE ASCENDER

Multi-use light-alloy right-hand rope ascender for climbing ropes or as a clamp for hauling/rescue.



Key Features:

- Cam opening lever usable with one hand
- Patented, one-handed cam release mechanism
- Durable steel cam with effective, non-destructive teeth
- Two attachment holes for various possible uses, anti-inversion cam system
- New steel cam, manufactured with technology that implements the resistance to wear and tear. Equipped with a set of teeth that protects the wear of the rope, but it is equally effective in blocking and ascending the rope. It also has three slots to prevent the accumulation of mud and reduce the effort needed to slide the device up the rope under any condition (muddy rope, frozen etc.)

Weight:..... 5.3 oz (150 g)

Sizing Info: ..8 mm - 13 mm rope

HD26254 \$71.00

COMPLIANT: UIAA CE EN 567, EN 12841-B



ISC ROCKER FOR ROPE 10.5–12.7MM

The ISC Rocker™ can be fitted to the rope at any point and can be used hands-free as a self-tailing device when travelling up or down the rope. The ISC Rocker™ Ropegrab for Rope Access back up is designed for use without a shock-absorber and can be used as a Rope Adjuster or on a work positioning lanyard/Flipline, (In accordance with EN358). Use 10.5 mm to 11.5 mm rope with the ISC Rocker™.

Key Features:

- Body Material: Aluminium
- Finish: Anodized

Height: 115 mm (4 1/2")

Width:..... 64 mm (2 1/2")

Weight:..... 170g (6oz)

Sizing Info: 10.5–12.7mm
..... (3/8"–1/2")

HD26293 \$111.49

COMPLIANT EN353-2;358;12841-A



CT QUICK STEP-A

Ascender for the right or left foot, when used in conjunction with an ascender handle (e.g. QUICK'UP) or a chest ascender (e.g. CHEST ASCENDER EVO), makes it easier and speeds up the ascent of a rope.



Key Features:

- Fully adjustable boot harness
- Reinforced foot-strap
- Easy-to-operate, integrated camlever
- Secure insertion mechanism prevents accidental opening

Weight:..... 5.8 oz (165 g)

Sizing Info:8–13 mm rope

RIGHT

Orange ●
HD26267 \$75.50

LEFT

Grey ●
HD26266 \$75.50



ISC STRYDER™ FOOT ASCENDER



The ISC STRYDER™ Foot Ascender has been designed following extensive feedback from industry users. During the development of STRYDER™, durability and functionality were at the top of the priority list. STRYDER™ utilizes tried & tested geometry, to provide a smooth upward movement and positive engagement on the rope.



Key Features:

- Fully adjustable boot harness
- Reinforced foot-strap
- Easy-to-operate, integrated camlever
- Secure insertion mechanism prevents accidental opening

Weight:..... 7 oz (198g)

Sizing Info:8–13 mm rope

MBS: 2.5 kN (562 lbf)

RIGHT

Green ●
HD26308 \$80.45

LEFT

Red ●
HD26309 \$80.45

CT CHEST ASCENDER EVO

Light alloy right-hand chest ascender for climbing up ropes, to use together with the ascender handle QUICK UP.



Key Features:

- External profile for the opening lever, which makes climbing up the rope smoother and more effective
- Shape for the hole in the opening lever, to facilitate use even when wearing gloves
- Lower hole design, so that the device always stays parallel to the user
- Patented system for unlocking the cam, with just one downwards movement necessary
- Anti-inversion cam system
- New steel cam, manufactured with technology that implements the resistance to wear and tear. Equipped with a set of teeth that protects the wear of the rope, but it is equally effective in blocking and ascending the rope. It also has three slots to prevent the accumulation of mud and reduce the effort needed to slide the device up the rope under any condition (muddy rope, frozen etc.)

Max Rope Size: 13 mm

Weight:..... 5.0 oz (140 g)

Sizing Info:8–13 mm rope

HD26253 \$70.00

COMPLIANT: UIAA CE EN 567, EN 12841-B





CT ROLLNLOCK

Ultra-light pulley / rope clamp (only 80 g!) designed for work, rope climbing maneuvers, rescue and self-rescue situations.



Key Features:

- Mobile side plates for the rope or on sling placement
- Spring operated cam for use as a rope ascender
- Sliding lock for use as a pulley
- Deal for the crevasse rescue
- It allows the hauling of light loads
- Developed to work also on wet or dirty ropes
- It can be used to adjust the positioning on webbing or daisy chain

MBS: 20 kN (4496 lbf)
Weight: 2.8 oz (80 g)

Sizing Info: 8–13 mm rope /
 10–16 mm webbing

HD26250 \$84.00

COMPLIANT: UIAA 127 CE EN 12278, EN 567



SMC ADVANCE TECH HX PULLEY

MADE IN THE USA



The new Advance Tech HX is ideal for all rescue applications where a small mechanical advantage system is being used. The HX is a double pulley with an integrated cam that provides immediate progress capture.



Key Features:

- Made from high quality aluminum
- Anodized to help prevent corrosion
- Supports rope diameters from 7 mm up to 12.5 mm
- Stainless steel pins retain the rope when a rigged system is pre-packed

Height: 1.97" (5.0 cm)
Width: 2.74" (6.9 cm)
Length: 5.08" (12.9 cm)
Weight: 9.5 oz (270 g)

MBS: 34 kN (7644 lbf)
Tread: 1.00"
Sheave: 1.37" Aluminum
Becket Strength: 18 kN

Double Pulley-Capture
 Orange/Grey
 SM154900N \$158.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), T



CT UP-LOCK COMPACT DOUBLE PULLEY

Double pulley with locking cam, designed for use as a ratchet pulley in a lightweight haul system with the UP ROLL pulley.

Key Features:

- Anodized light alloy side plates
- Cast stainless steel cam
- Alloy pulleys with ball bearings
- Free-lock system allows one-handed cam action

HD26279 \$105.90



SMC ADVANCE TECH MATE

MADE IN THE USA



The new SMC Advance Tech Mate is a double pulley specifically designed to work with the new Advance Tech HX Pulley in a mini haul system. This new pulley frame design is ideal for using in a compact haul kit. Integrated stainless steel pins help retain the rope when a rigged system is pre-packed in order that the system can be pulled out and used immediately.



Key Features:

- Made from high quality aluminum
- Anodized to help prevent corrosion
- Supports rope diameters from 7 mm up to 12.5 mm
- Stainless steel retaining pins
- NFPA 1983 T Technical Use

Height: 1.81" (4.6 cm)
Width: 2.40" (6.1 cm)
Length: 2.97" (7.5 cm)
Weight: 5.4 oz (154 g)

MBS: 34 kN (7644 lbf)
Tread: 1.00"
Sheave: 1.37" Aluminum

Orange/Grey
 SM154801N \$87.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), T



SMC 3" PRUSIK

MINDING PULLEY **MADE IN THE USA**



The unique shape of SMC's aluminum side plates allow the efficient use of Prusik hitches as a belay or progress capture device. Constructed with a 3" diameter sheave running on a high efficiency ball bearing. Low profile fasteners help eliminate the possibility of the pulley snagging. Pulley will accommodate up to 13 mm rope.

- ARBORIST**
- FIRE RESCUE**
- ROPES COURSE**
- ROPE ACCESS**
- CAVE RESCUE**
- WILDERNESS RESCUE**
- ROPE RESCUE**

Key Features:

- Ball bearing
- Precision machined aluminum side plates and 3" sheaves
- Large top hole easily accepts 3 large carabiners
- Sealed bearings
- Designed for 11 mm to 13 mm ropes
- Double pulleys include a becket

SINGLE PULLEY

Tread:.....2.46"
Sheave:.....2.97"
Weight:..... 12.5 oz (354 g)
MBS: 38 kN (8542 lbf)
Height: 1.38" (3.5 cm)
Width:.....4.17" (10.6 cm)
Length:.....5.85" (14.9 cm)

Red ●
 SM158000N \$99.00

DOUBLE PULLEY

Tread:.....2.46"
Sheave:.....2.97"
Weight:..... 1.30 lbs (590 g)
MBS: 48 kN (10790 lbf)
Height: 2.20" (5.6 cm)
Width:.....4.17" (10.6 cm)
Length:.....7.10" (18 cm)

Gold ●
 SM158500N \$147.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2012)**

SMC 2" PRUSIK

MINDING PULLEY **MADE IN THE USA**



This mid-sized PMP is the perfect choice for rigging with 11 mm (7/16") rope or when you don't have room for a 3" PMP. Pulley will accommodate up to 13 mm rope.

- ARBORIST**
- FIRE RESCUE**
- WILDERNESS RESCUE**
- ROPE ACCESS**
- CAVE RESCUE**
- ROPE RESCUE**

Key Features:

- Precision machined aluminum side plates and 2" sheaves
- Sealed Bearings
- Double pulleys include a becket

SINGLE PULLEY

Sheave:.....2.00"
Tread:..... 1.49"
Weight:..... 6.3 oz (179 g)
MBS: 36 kN (8093 lbf)
Height: 1.37" (3.5 cm)
Width:.....2.90" (7.4 cm)
Length:.....3.97" (10.1 cm)

Green/Black ●
 SM152700N
 \$72.00

Black ●
 SM152701N
 \$72.00

DOUBLE PULLEY

Sheave:.....2.00"
Tread:..... 1.49"
Weight:..... 10.4 oz (295 g)
MBS: 46 kN (10341 lbf)
Height: 2.20" (5.6 cm)
Width:.....2.90" (7.4 cm)
Length:.....5.10" (13.0 cm)

Green/Grey ●
 SM152800N
 \$112.00

Black ●
 SM152801N
 \$112.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2012)**



SMC SWIFTWATER PULLEY

MADE IN THE USA



In recognition of the unique requirements found in Swift Water Rescue, this aluminum pulley features a series of holes in the side plates to help to minimize any hydroplaning.

- WATER RESCUE
- FIRE RESCUE
- WILDERNESS RESCUE
- ROPE RESCUE

Key Features:

- Lightweight aluminum
- Sealed bearings
- 2" Aluminum sheave
- Accepts ropes up to 1/2" t

Height: 1.37" (3.5 cm)	Material: Aluminum
Width: 3.00" (7.6 cm)	Axle Ball Bearing
Length: 4.00" (10.2 cm)	Sheave Material: Aluminum
Weight: 6.0 oz (170 g)	Sheave: 2.00"
MBS: 34 kN (7786 lbf)	Max rope size: 13 mm

SINGLE PULLEY

Red ●
SM147000 \$49.00

BERRY COMPLIANT **COMPLIANT: UIAA 127 CE EN 12278**

ISC RESQ PULLEY DBL BUSHED – RED



ISC Double Rescue Pulley has a Bushed, standard free-running wheel (non-locking). The ISC Progress Capture Pulleys feature a new lightweight center plate, re-positioned wheel to reduce rope friction and a rated Becket, through which even an ANSI carabiner can be fully rotated. The ISC Double Rescue Pulley is fitted with tamper-proof rivets and is individually serial numbered.

Key Features:

- Wheel material: Aluminum
- Finish: Anodized

Height: 154 mm (6")	Depth: 62 mm (2 7/16")
Width: 74 mm 2 15/16")	Weight: 660g (23 oz)

Red ●
HD26310 \$100.73

COMPLIANT: EN 12278



SMC MICRO PRUSIK MINDING PULLEY

MADE IN THE USA



Just the thing for smaller ropes and lighter loads, SMC's Micro PMP's are ideal for building a mini haul rig or anywhere that a compact lightweight system is needed. Double version is designed with a becket to accommodate compound and complex pulley systems. Max rope diameter 13 mm.

- ARBORIST
- CAVE RESCUE
- CONFINED SPACE
- FIRE RESCUE
- RECREATIONAL CAVING
- WILDERNESS RESCUE

Key Features:

- Precision machined aluminum side plates and 1.38" sheaves
- Sealed Ball Bearings
- Double pulleys include a becket

SINGLE PULLEY

Sheave: 1.37"
Tread: 1.0"
MBS: 22 kN (5000 lbf)
Weight: 3.5 oz (99 g)
Height: 1.12" (2.8 cm)
Width: 2.55" (6.5 cm)
Length: 3.75" (9.5 cm)
Becket Strength: 20 kN

Red/Grey ●
SM153000N
\$47.50

Black ●
SM153001N
\$47.50

Gold/Grey ●
SM154000N
\$94.00

Black ●
SM154001N
\$94.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2012), T**





SMC JR PULLEY MADE IN THE USA



These SMC Pulleys are the mini of minis. Efficient and lightweight, its solid strength and efficiency tests to greater strengths than other pulleys in the same size and price range. It has the required prusik minding capability for use in a haul system (JRB Pulleys are now incorporated in our 4:1 Kit. A 1.20" nylon sheave and zinc-coated axle make any system run smooth. Simple to use and easy to carry into the field. Max Rope diameter for the CR is 13 mm. Max rope diameter for the JR and JRB is 9 mm. The CR pulley is a single pulley, while the JR and JRB pulleys are double pulleys



Key Features:

- Nylon sheave
- Precision machined aluminum side plates
- Zinc coated axle
- Rotating side plates
- JRB becket MBS: 2,298 lbf (13 kN)

DOUBLE PULLEY JRB

Tread:.....0.83" **Height:**.....1.56" (4.0 cm)
Weight:.....3.3 oz (94 g) **Length:**.....3.57" (9.1 cm)
MBS:..... 22 kN (5000 lbf) **Width:**.....1.75" (4.4 cm)
Sheave:.....1.20"

Blue ● Black ●
 SM159200 \$34.95 SM159201 \$34.95

DOUBLE PULLEY JR

Tread:.....0.83" **Height:**.....1.56" (4.0 cm)
Weight:.....3.2 oz (89 g) **Length:**.....2.84" (7.2 cm)
MBS:..... 22 kN (5000 lbf) **Width:**.....1.75" (4.4 cm)
Sheave:.....1.20"

Blue ● Black ●
 SM159300 \$34.95 SM159301 \$34.95

BERRY COMPLIANT **COMPLIANT: UIAA 127 CE EN 12278**



SMC CRX PULLEY MADE IN THE USA



The new SMC CRx (Crevasse Rescue) Pulley is a full featured pulley specifically designed to be diminutive in size and weight, yet extremely strong and efficient. This new pulley is ideal for use in a 2-to-1 C-system or as a 3-to-1 Z-system and includes prusik minding capability. Ideal for rescue use by those who demand the lightest, strongest pulley available. Easy to use and easy to carry, this pulley also has color-contrasting aluminum rotating side plates for simple rope insertion and removal.



Key Features:

- Made from high quality aluminum
- Anodized side plates help prevent corrosion
- Supports rope diameters up to ½ inch (13 mm)
- Stainless steel rivet axle
- Nylon sheave

Tread:.....0.83" **Length:**.....2.70" (6.9 cm)
Height:.....1.07" (2.7 cm) **Weight:**.....1.8 oz (52 g)
Width:.....1.75" (4.4 cm) **MBS:**..... 22 kN (5000 lbf)
Sheave:.....1.20"

SINGLE PULLEY

Blue ●
 SM157300 \$16.95

BERRY COMPLIANT **COMPLIANT: UIAA 127 CE EN 12278**



SMC SHUTTLE



One of the lightest, fastest, and most versatile shuttles available for ropes course and adventure park use, this sealed ball-bearing shuttle is available with stainless steel sheaves for use with cable, or aluminum sheaves for use with rope-based systems.

ROPE RESCUE ROPES COURSE

Key Features:

- Four Independent Sealed Ball Bearings
- Aluminum 1 3/8" Sheaves
- Multiple Attach Points
- Lightweight Design
- Fits up to 13 mm Rope

Tread:..... 1.0"
Height:..... 4.25" (10.8 cm)
Width:..... 1.07" (2.7 cm)
Length:..... 3.21" (8.2 cm)
MBS:..... 26 kN (5845 lbf)
Sheave:..... 1.32"

ROPE

Weight:..... 8.0 oz (227 g)

Blue ●
 SM156302 \$82.00

BERRY COMPLIANT

CABLE

Weight:..... 8.0 oz (227 g)

SMC SHUTTLE CABLE XTREME



The SMC Shuttle Cable Xtreme is ideal for high-use environments where users push their gear to the limit. It is designed for extreme or continuous service in permanently rigged challenge courses, commercial zip lines, and for eco-tourism applications. Designed for the commercial operator, the ball bearings may be replaced to extend the overall useful life of the pulley. This pulley is designed to be used with cable.


ROPE RESCUE ROPES COURSE

Key Features:

- Twin Independent Sealed Ball Bearings
- Zinc Plated Stainless 1 3/8" Sheave
- Multiple Attach Points
- Fits up to 13 mm Cable
- Field Rebuildable using the Xtreme Service Kit

Tread:..... 1.0"
Height:..... 4.25" (10.8 cm)
Width:..... 1.07" (2.7 cm)
Length:..... 3.21" (8.2 cm)
MBS:..... 26 kN (5845 lbf)
Weight:..... 7.6 oz (215 g)
Stainless Sheave:..... 1.37"
Sheave:..... 1.32"

Green ●
 SM156304 \$115.00



SMC XTREME REBUILD PACK

To maintain peak performance the bearing assemblies on the Shuttle Xtreme can be replaced by the user in just 4 steps with the new Cable Xtreme Service Kit or Rebuild Pack. The Xtreme Service Kit (SKU SM156309) comes with all the necessary parts and tools needed to rebuild a single unit. The Xtreme Rebuild Pack (SKU SM156308) comes with all the parts needed to rebuild up to 10 pulleys (tools not included).

Key Features:

- QTY 20 - Axle
- QTY 20 - Axle Spacer
- QTY 20 - Snap Ring
- QTY 20 - Ball Bearing Assemblies
- QTY 40 - Lock Washer
- QTY 40 - Button Screw
- Tools NOT included

SM156308 \$235.00

SMC XTREME SERVICE KIT

To maintain peak performance the bearing assemblies on the Shuttle Xtreme can be replaced by the user in just 4 steps with the new Cable Xtreme Service Kit or Rebuild Pack. The Xtreme Service Kit (Part# SM156309) comes with all the necessary parts and tools needed to rebuild a single unit. The Xtreme Rebuild Pack (Part# SM156308) comes with all the parts needed to rebuild up to 10 pulleys (tools not included).

Key Features:

- QTY 2 - Axle
- QTY 2 - Axle Spacer
- QTY 2 - Snap Ring
- QTY 2 - Ball Bearing
- Snap Ring Pliers
- Assemblies
- QTY 4 - Lock Washer
- QTY 4 - Button Screw
- Tools: Hex Wrench
- Xtreme Wrench

SM156309 \$35.00

BERRY COMPLIANT



SMC KOOTENAY

HX PULLEY MADE IN THE USA



The Kootenay HX from SMC is the most advanced Knot Passing Pulley on the market. This is an entirely new and more compact design and lives up to its "HX" (High Strength) name as the lightest, strongest, most efficient, and durable pulley of its kind available. Sealed ball bearings provide optimal efficiency and help to reduce the performance-robbing resistance that is inherent in most multiple component systems. Adding to its versatility, the Kootenay HX may also serve as an edge roller for rope protection.



Key Features:

- Sealed Ball bearings
- High-strength aluminum sheave
- Primary carabiner hole accepts numerous rescue carabiners
- Secondary carabiner holes for use with tag or belay lines
- Solid aluminum side plates
- Two quick-release pins included for conversion to a high-strength tie off
- For use with 10 mm to 13 mm rope

Height: 3.40" (8.6 cm)

Width: 4.34" (11.0 cm)

Length: 8.67" (21.6 cm)

MBS: 38 kN (8542 lbf)

Weight: 1.65 lbs (750 g)

Sheave: 3.46"

Max Rope Size: 13mm

Axle Ball Bearing

Sheave Material: Aluminum

Tread: 2.22"

Gold ●

SM125500 \$224.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), G



SKEDCO RESCUE HAULER



Designed to lift heavy rescue loads under demanding conditions, this double 3" pulley with integrated cam prevents accidental lowering and possible shock-loading of the rescue system. With the cam in the disengaged position, the Rescue Hauler functions as a double pulley. With cam engaged, the rope can travel in only one direction. Use the Rescue Hauler with the matching double 3" pulley to create a 4:1 mechanical advantage. Both products are anodized aluminum, red in color with one black sideplate.

Axle Bushing

Sheave: 3.00"

Height: 2.50" (6.4 cm)

Width: 4.25" (10.8 cm)

Length: 10.50" (26.7 cm)

Tread: 2.22"

Max Rope Size: 13mm

MBS: 53 kN (11915 lbf)

Weight: 2.31 oz (1.040 kg)

SK710 \$355.15

BERRY COMPLIANT

COMPLIANT: CE



SMC/RA 2" ALUMINUM

PULLEY MADE IN THE USA



SMC revives their original 2" Aluminum sideplate pulley. Sealed ball bearing, 1 1/2" sheave tread diameter, 2" sheave, 1/2" rope max.

Height: 1.34" (3.4 cm)

Width: 2.50" (6.4 cm)

Length: 4.60" (11.7 cm)

MBS: 27 kN (6070 lbf).

Weight: 6.3 oz (179 g)

Material: Aluminum

Axle Ball Bearing

Sheave material: Aluminum

Sheave: 2.00"

Tread: 1.49"

Max Rope Size: 13mm

Green ●

SM130500 \$66.00

COMPLIANT: NFPA 1983 (2017), T



SMC/RA STAINLESS

STEEL PULLEYS **MADE IN THE USA**



Based on Russ Anderson's original design, these pulleys are essential equipment for the serious rigger. Rotating side plates allow attachment of the pulley anywhere on the rope and the 3" and 4" models will accept multiple carabiners. Axle nuts are marked with a blue witness line to indicate if the axle nut has been turned or tampered with.

- CONFINED SPACE**
- FIRE RESCUE**
- ROPE RESCUE**

Key Features:

- Stainless steel side plates

SINGLE PULLEY

2" NFPA-T

MBS: 29 kN (6519 lbf)
Height: 1.40" (3.6 cm)
Length: 4.60" (11.7 cm)
Width: 2.50" (6.4 cm)
Weight: 8.6 oz (244 g)
Sheave: 2.00"
Tread: 1.49"

Oilite	Ball
SM150000 \$53.00	SM150500 \$76.00

3" NFPA-G

MBS: 51 kN (11465 lbf)
Height: 1.50" (3.8 cm)
Length: 6.6" (16.8 cm)
Width: 3.6" (9.1 cm)
Weight: 1.0 oz (454 g)
Sheave: 3.00"
Tread: 2.34"

Oilite	Ball
SM151000 \$95.00	

4" NFPA-G

MBS: 51 kN (11465 lbf)
Height: 1.50" (3.8 cm)
Length: 7.7" (19.6 cm)
Width: 4.6" (11.7 cm)
Weight: 1.44 oz (652 g)
Sheave: 4.00"
Tread: 3.33"

Oilite	Ball
SM152000 \$107.00	SM152500 \$140.00

DOUBLE PULLEY

2" NFPA-T

Height: 2.0" (5.1 cm)
Length: 6.6" (16.8 cm)
MBS: 41 kN (9217 lbf)
Sheave: 2.00"
Tread: 1.49"

Oilite	Ball
SM155000N \$120.00	

3" NFPA-G

Width: 2.5" (6.4 cm)
Weight: 1.01 oz (460 g)
Weight: 1.06 oz (482 g)

Ball	
SM155500N \$120.00	

4" NFPA-G

MBS: 63 kN (14163 lbf)
Height: 2.40" (6.1 cm)
Length: 9.9" (25.1 cm)
Width: 4.60" (11.7 cm)
Weight: 2.52 oz (1.142 kg)
Sheave: 4.00"
Tread: 3.33"

Oilite	Ball
SM157000N \$213.00	SM157500N \$242.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2017), T**

SMC TR PULLEY **MADE IN THE USA**



The TR Pulley is strong, reliable compact, and lightweight. It is reasonably priced but doesn't sacrifice efficiency. Great performance for its size and cost. The TR Pulley has a true Oilite Bearing on a zinc coated axle for reliable performance.

- ARBORIST**
- CAVE RESCUE**
- ROPE RESCUE**
- WATER RESCUE**
- WILDERNESS RESCUE**
- RECREATIONAL CAVING**
- CONFINED SPACE**

Key Features:

- Lightweight aluminum
- Oilite bearings
- 1.20" Aluminum sheave
- Accepts ropes up to 1/2"

Tread: 0.83"	MBS: 26 kN (5845 lbf).
Height: 1.07" (2.7 cm)	Weight: 2.3 oz (66 g)
Width: 1.75" (4.4 cm)	Sheave: 1.20"
Length: 3.0" (7.6 cm)	

SINGLE PULLEY

Green/Grey
 SM159500 \$39.00

BERRY COMPLIANT

ISC D4PRO WORK/RESCUE DESCENDER WITHOUT PANIC BRAKE

ISC
Solutions in Metal

The standard D4™ Work/Rescue Descender has proven to be a popular Descender among Rope Access & Rescue users, all over the world. Many users value the extra peace of mind of having a panic-brake function. Feedback gathered from highly qualified and experienced 'Pro' users highlighted a demand for a device which does not incorporate a panic-brake function. Enter the D4PRO! The ISC D4PRO Work/Rescue Descender is the same great Work/Rescue Descender, but without the panic brake. This can be particularly useful on longer descents and in rescue/belay applications, where a broader 'sweet spot' is welcomed. As the D4PRO does not incorporate a panic-brake, it is not possible for the device to fully meet the criteria of NFPA and ANSI Standards.

 GLOBAL

 ROPE RESCUE

 ARBORIST

 FIRE RESCUE

 ROPE ACCESS

 WILDERNESS RESCUE

Key Features:

- Panic brake: No
- Number of persons: 2
- ANSI compliant version: No
- Body Material: Aluminium
- Finish: Anodized

Rated Load: 240kg (529lb)
Weight:..... 676g (24oz)

Sizing Info: . 10.5–11.5 mm rope

HD26289 \$247.80

COMPLIANT: EN12841



ISC D4™ WORK/RESCUE DESCENDER WITH PANIC BRAKE

ISC
Solutions in Metal

The D4™ Work/Rescue Descender features a unique and innovative cam action, which offers precise control at slow or fast speeds. The progressive cam works by way of one cam operating inside another cam. The D4™ has a 240kg (500lbs) Working load limit which means it is suitable for two-man rescue, without the need for the creation of extra friction. The handle mechanism is designed to rotate through 360° making its use easier and simpler. The handle itself is made from aluminum rather than plastic and is coated in a specially chosen paint which provides extra grip. Cleverly, the handle rotation is accompanied by audible clicks which help the user identify the correct position of the handle.

 GLOBAL

 ROPE RESCUE

 ARBORIST

 FIRE RESCUE

 ROPE ACCESS

 WILDERNESS RESCUE

Key Features:

- Finish: Anodized
- Body Material: Aluminium

Height: 200 mm (7 7/8")
Width:..... 83 mm (3 1/4")
Depth: 80 mm (3 1/8")

Weight:..... 678 g (24 oz)
Sizing Info: . 10.5–11.5 mm rope

HD26268R \$247.80

COMPLIANT: EN 12841M, ANSI Z359, NFPA 1983



ISC D5PRO WORK/RESCUE DESCENDER WITHOUT PANIC BRAKE



The standard D5TM Work/Rescue Descender has proven to be a popular Descender for the North American Fire & Rescue and Tower Climbing markets, which typically use 1/2" (12.7mm) ropes. Feedback gathered from highly qualified and experienced 'Pro' users highlighted a demand for a device which does not incorporate a panic-brake function. The D5PRO Work/Rescue Descender is the same great Work/Rescue Descender, but without the panic brake. This can be particularly useful on longer descents and in rescue/belay applications, where a broader 'sweet spot' is welcomed



Key Features:

- Compatible with rope diameter (12.7mm)
- Number of persons: 2
- ANSI compliant version: No
- Body Material: Aluminium
- Finish: Anodized

Weight:..... 818g (29oz) **Sizing Info:** 12.7mm (1/2")
Rated Load: 240kg (529lb)

HDHD26290 \$278.75

COMPLIANT: EN12841



ISC D5™ WORK/RESCUE DESCENDER WITH PANIC BRAKE



The ISC D5™ Work/Rescue Descender has been designed for use on 1/2" (12.5mm) rope. The D5™ Descender is EN12841:2006/C and is compliant with NFPA G and ANSI Z359.4:2013 and developed for the North American fire & rescue and tower climbing markets, which typically use 1/2" ropes. The D5™ is a double-stop device with an auto-lock function, which is activated whenever the operator releases the handle; and a panic-brake function, which is not overly sensitive in normal use. The ISC D5™ Work/Rescue Descender also has a double-locking safety mechanism. In addition to the locking button, the side plates are designed such that the plates cannot be rotated open, whilst under load, due to the position of the carabiner. The ISC D5™ is easy to attach/detach from the rope, without having to detach from the harness, therefore eliminating the risk of accidental dropping of the device. The ISC D5™ features a progressive cam action, which offers precise control during low or high speeds. The cam is made from high grade, solid Stainless Steel, for maximum durability, even in harsh environments, such as geotech work. Designed to accommodate ropes from 12.5 mm to 13.0 mm.



Length:..... 114.7 cm (5 3/4") **Weight:**..... 818 g (29 oz)
Width:..... 9.4 cm (3 11/16") **Sizing Info:** 12.7 mm (1/2")

HD26270R \$278.75

COMPLIANT: CE






CT SPARROW 200R

Developed specifically for rescue loads, the Sparrow 200R excels with heavy workloads. It may be used for descending, ascending, and lowering operations with 11mm rope. Internal brake spur is designed for smooth, effective control with a range of loads, light to heavy. Brake lever is designed to return to stop when released, and the EBS Safety System reduces speed if the lever is accidentally fully opened.

Key Features:

- Able to load the device mid-line
- Multifunction control lever
- EBS Safety System
- Built-in braking spur for extra friction

Silver/Orange 
 HD26282 \$225.00

COMPLIANT EN 341:2011-2A 200KG/180M // EN 12841:2006-C 210 KG



SMC SPIDER MADE IN THE USA



The SMC Spider is an Auto Braking NFPA T Rated Descender designed for work positioning and personal descent. The Spider provides persons working at height the ability to easily maneuver and secure themselves while on the fly. Allowing users to easily load and unload from the device without having to unclip from their harness, it is an ideal descender for window washers, fire fighters, and industrial workers who need a device that provides them with optimal strength and performance.

-  FIRE RESCUE
-  ROPE ACCESS
-  ROPE RESCUE

Designed to accommodate ropes from 11 mm to 12.5 mm.

Height: 1.55" (3.9 cm) **MBS:** 13 kN (3174 lbf)
Length: 8.64" (21.9 cm) **Sizing Info:** ..11.0 mm - 12.5 mm
Width: 3.35" (8.5 cm) rope
Weight: 1.24 lbs (562 g)

SM220300N \$181.00

COMPLIANT: NFPA 1983 (2017), T

NFPA

How NFPA Certification Works:

Ropes and components that meet the NFPA's 1983 Standard for Fire Service Life Safety Rope and Equipment for Emergency Services 2017 Edition also carry special markings for class of intended use. The three major classes are: Escape, Technical, and General. Each of these classes have different performance requirements when the product is tested for certification.

Most ropes and auxiliary equipment products covered by NFPA 1983 use the Escape, Technical, and General classifications. Product categories that do not use these nomenclatures include Harnesses, Victim Extrication Devices, Water Rescue Throwlines, and Moderate Elongation Laid Life Safety Rope. All of these exceptions have their own specific classes of use or are for a singular, specific type of use. Escape use products are marked with the words "Escape-Use"; where space is limited on the product, this class can be designated simply by the letter "E".

**Technical use products are marked with the words "Technical-Use"; where space is limited on the product, this class can be designated simply by the letter "T".*


General use products are marked with the word "General-Use"; where space is limited on the product, this class can be designated simply by the letter "G".

For example:

Carabiners are marked, "Meets NFPA 1983, 2017 ED." They also must carry the name or logo of the manufacturer, along with the label of the third party that certifies that the product meets the standard. NFPA-certified carabiners also have either a T or a G stamped into the frame. The letter T indicates that the carabiner is for technical users and designed for when actual system loading is well known and within the performance standards of a T carabiner. The letter G indicates that the carabiner is for general rescue use as per the performance standards in NFPA 1983.

**Note: in editions of NFPA 1983 prior to 2012 the T rating was known as L. The performance requirements have not changed significantly, only the name. Many users felt the term "Technical" was more accurately descriptive than the term "Light". The most up-to-date version of NFPA 1983 is NFPA 1983-2017. Look for gear marked to the most current version of the standard.*



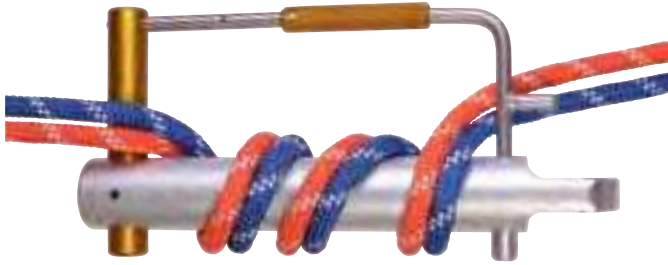

ALPINE BRAKE TUBE MADE IN THE USA

The best device hands down for passing knots in ropes easily and efficiently. Bead blasted and anodized for long wearing friction this lowering device offers tie-off capability. Special risers on the bottom keep it off the ground while in use. Works with virtually any size life safety rope. Not to be used for rappelling.

- ROPE RESCUE
- ROPE RESCUE
- WILDERNESS RESCUE

Key Features:

- Aluminum tubing and stainless steel
- Runs multiple ropes
- Passes knots
- Ties off any rescue load

Height: 2.0" (5.1 cm) **Width:**..... 6.0" (15.2 cm)
Length:..... 13.0" (33.0 cm) **Weight:**..... 2.90 lbs (1.310 kg)

HD26048 \$265.00

BERRY COMPLIANT



SMC COMPACT U RACK MADE IN THE USA

SMC's Compact U Rack has many advantages over other small U racks beyond SMC's quality manufacturing. The ingenious design prevents the bars from sliding around the bottom of the rack. The standard rack width allows it to be rigged on two ropes. The upper and lower tie off bars provide a greater variability of friction and secure tie off.

- ROPE RESCUE
- CAVE RESCUE
- RECREATIONAL CAVING
- WILDERNESS RESCUE
- FIRE RESCUE

Key Features:

- Stainless steel body and bars
- Can be rigged with 2 ropes
- Compact Size
- Two opposed tie off bars

Height: 1.00" (2.5 cm) **Length:**..... 9.60" (24.4 cm)
Width:..... 3.60" (9.1 cm) **Weight:**..... 1.66 lbs (754 g)

SM14400N \$133.00

COMPLIANT: NFPA 1983 (2017), G(FOR ROPES 11MM-16MM)
 NFPA 1983(2012),T(FOR ROPES 9MM-12.5MM)



SMC NFPA RACK ASSEMBLY MADE IN THE USA



The NFPA rack is sold as a complete un-assembled kit so you can arrange it for right-hand or left-hand use. SMC has also added a 17.9" long rack to complete the line.

- ROPE RESCUE
- CAVE RESCUE
- FIRE RESCUE
- WILDERNESS RESCUE
- RECREATIONAL CAVING

Key Features:

- 1 six-bar rappel rack
- 1 anodized aluminum grooved straight slot bar
- 1 stainless steel tie-off bar
- 4 aluminum angled brake bars

Height: 1.00" (2.5 cm) **Weight:**..... 1.83 lbs (828 g)
Width:..... 3.75" (9.5 cm) **MBS:** 44 kN (10000 lbf)
Length:..... 14.40" (36.6 cm) **Material:** Stainless Steel / Aluminum

STRAIGHT EYE

SM14001N \$139.00

90 DEGREE EYE

SM14002N \$134.00

17.9" LONG RACK

Height: 1.00" (2.5 cm) **Length:**..... 17.9" (45.5 cm)
Width:..... 3.75" (9.5 cm) **Weight:**..... 2.06 lbs (833 g)

SM14003N \$142.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), G(FOR ROPES 11MM-16MM)
 NFPA 1983 > (2012),T(FOR ROPES 9MM-12.5MM)



SMC NFPA U RACK MADE IN THE USA

With the same overall dimensions as SMC's NFPA long rappel rack but in a U style rack. Available with aluminum bars and a stainless tie-off bar. What makes this rack different than most other U racks is a proprietary design that allows the aluminum bars to unlatch for ease of use yet not pass around the bend of the rack and thereby become misaligned.

Key Features:

- Hinged bars for easier/faster rigging
- Strong secure connection
- Stainless steel tie-off bar
- 5 Aluminum Bars

Height: 1.00" (2.5 cm) **Length:** 14.0" (35.6 cm)
Width: 3.60" (9.1 cm) **Weight:** 1.86 lbs (842 g)
Height: 0.78" (2.0 cm)

SM14600N \$133.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), G(FOR ROPES 11MM-16MM)
 NFPA 1983 (2012), T(FOR ROPES 9MM-12.5MM)



SMC MICRO U-RACK MADE IN THE USA

The SMC Micro U-Rack assembly is the smallest and lightest of all SMC Rappel Racks. The design is based on the same principles of our proven NFPA Rappel Racks but more suited for sport climbing and caving expeditions. This device is ideal for either a long rappel or lowering as it evenly distributes the weight between both sides of the rack and does not allow the rope to twist.

* The Micro Rack MBS range is dependent on rope diameters tested from 7 mm to 12.5 mm

ROPE RESCUE

CAVE RESCUE

WILDERNESS RESCUE

RECREATIONAL CAVING

Key Features:

- Designed for reliability
- Rack frame and bars are polished Stainless Steel
- Supports rope diameters from 7mm up to 12.5 mm
- Designed for long lasting service

Height: 0.78" (2.0 cm) **Weight:** 16.08 oz (399 g)
Width: 2.75" (7.0 cm) **MBS:** 8–22 kN
Length: 8.65" (21.6 cm) (1798–5000 lbf)
Max Rope Size: 12.5mm

SM13700 \$92.75

BERRY COMPLIANT



SMC RACK KITS MADE IN THE USA

Brake racks can be customized for your specific application. The following kits are designed based upon the preferences of frequent rack users. To determine which rack kit best fits your need, review the following:

1. Choose from "straight" or "90 degree" harness attachment eye. Most users prefer to orient the rack's short leg pointing down. Most harnesses with a sewn-in "D" ring that lays flat against the user's stomach (like our Avatar) need a 90 degree twist eye rack.
2. Select Aluminum or Stainless Steel bars. SS bars are cleaner on the rope and last longer, but have less friction and thus are faster rides with the same number of bars. Select a model number with an A at the end for aluminum bars (including an aluminum top bar) or an S for stainless steel bars.
3. The addition of a stainless steel top bar with an extension (hyper-bar) accommodates easy lock off and extra control - more money but worth it, especially with stainless steel bars. Select a model with an S-2 at the end. (SM13006S2 & SM13506S2 do not include hyper-bar)

Key Features:

- Allows user to adjust friction, even under load
- Welded eye is very strong
- Can be used as a lowering device
- Does not twist rope
- Can be easily attached to rope while still attached to the seat harness
- May be used with a variety of rope diameters
- Allows use of two ropes at the same time
- Kits are created with SMC parts and come un-assembled

STRAIGHT EYE J RACK

Height: 1.0" (2.5 cm) **Length:** 14.40" (36.6 cm)
Width: 3.75" (9.5 cm)

1 ss top bar, 1 ss grooved bar, 4 regular ss bars
Weight: 1.69 oz (780 g)

1 tie off bar, 1 ss grooved bar, 4 regular ss bars
Weight: 1.79 oz (810 g)

SM13006S2 \$174.50

SM13007S2 \$152.00

90 DEGREE EYE J RACK

1 ss top bar, 1 ss grooved bar, 4 regular ss bars
Weight: 1.69 oz (780 g)

1 tie off bar, 1 ss grooved bar, 4 regular ss bars
Weight: 1.79 oz (810 g)

SM13506S2 \$174.50

SM13507S2 \$152.00

BERRY COMPLIANT



RACK FRAME MADE IN THE USA

Type #304 stainless steel construction, with a welded eye for extra strength. Each eye weld is inspected for dye penetration before shipping. Average tensile of material used is over 10,000 lbf.

- Key Features:**
- Stainless Steel

STRAIGHT EYE, 6 BAR CAPACITY

Height:.....0.38" (1 cm)
Width:.....2.0" (5.1 cm)
Length:.....14.4" (36.6 cm)
Weight:.....14.5 oz (397 g)

SM13002 \$55.00

90 DEGREE EYE, 6 BAR CAPACITY

Height:.....0.38" (1 cm)
Width:.....2.13" (5.4 cm)
Length:.....14.4" (36.6 cm)
Weight:.....14.5 oz (397 g)

SM13502 \$55.00

BERRY COMPLIANT

BUILD YOUR OWN BRAKE RACK

1. Choose a Rack Frame

Open rack frames are the most common, and facilitate ease of adding/subtracting friction during use. Choose a straight-eye or twisted-eye configuration depending on your harness style – the open leg should face down and away from the user during use. A U frame will typically be stronger than an open frame.

2. Choose your Brake Bars

Aluminum vs steel is a matter of use and personal preference. Aluminum bars provide greater friction, but will also build up more heat during use. Bars with straight slots can make it easier to determine whether the rack is rigged incorrectly.

3. Select a Top Bar

Using the optional top bar with greater mass can help to dissipate heat during use. These bars also often feature a groove to help keep the rope centered on the rack.

4. Optional: Tie-off bar (Hyperbar)

The hyperbar makes it easier to add friction during use, and to tie off. This is an optional addition, but is a good idea for long, variable drops and fluctuating loads.



ALUMINUM TOP BAR W/ GROOVE MADE IN THE USA

7/8" diameter aluminum bar for one of your first or top bars. The extra mass acts as a heat sink and the training groove helps keep the rope centered in your rack. Use only one top bar per rack.

- Key Features:**
- Aluminum

Height:.....0.88" (2.2 cm) **Length:**.....2.50" (6.4 cm)
Width:.....0.88" (2.2 cm) **Weight:**.....1.8 oz (51 g)
Max Rope Size:.....13 mm **MBS:**.....14 kN (3147 lbf)

Red ●
 SM12605 \$12.95

BERRY COMPLIANT



STAINLESS STEEL TOP BAR W/ GROOVE MADE IN THE USA

The 7/8" top bar is designed to stay on your rack and virtually last forever. Has machined groove to keep the rope centered. Core drill out keeps this bar cool and lightweight. Use only one top bar per rack.

- Key Features:**
- Stainless Steel

Height:.....0.88" (2.2 cm) **Length:**.....2.47" (6.3 cm)
Width:.....0.88" (2.2 cm) **Weight:**.....4.1 oz (120 g)

SM11000 \$62.00

BERRY COMPLIANT



STAINLESS STEEL STRAIGHT SLOT BAR MADE IN THE USA

Straight slot "stupid bar" of 1" tubular stainless steel.

- Key features:**
- Brake Bar straight slot
 - Tubular stainless steel

Height:.....1.0" (2.5 cm) **Weight:**.....2.8 oz (80 g)
Width:.....1.0" (2.5 cm) **Length:**.....2.45" (6.2 cm)

Black ●
 SM12020 \$19.95

BERRY COMPLIANT



STEEL TIE OFF BAR MADE IN THE USA

Large 1" diameter hyper-bar with extension and pin to make locking off easier as well as providing additional friction when needed. Use as a top bar.

- Key Features:**
- Stainless Steel

Height: 1.0" (2.5 cm) **Length:**.....3.65" (9.3 cm)
Width:.....2.0" (5.1 cm)

1" U RACK TOP BAR **1" TIE OFF BAR**
Weight:..... 5.3 oz (150 g) **Weight:**..... 5.1 oz (145 g)
 SM12110 \$36.50 SM12301 \$38.00

BERRY COMPLIANT



ALUMINUM BRAKE BARS MADE IN THE USA

Solid aluminum gives these bars maximum friction and good wear characteristics. Lighter than the stainless bars and available in a straight slot configuration. 7/8" diameter models fit all SMC racks.

- Key Features:**
- Aluminum

Height: 0.88" (2.2 cm) **Length:**..... 2.50" (6.4 cm)
Width:.....0.88" (2.2 cm)

REGULAR, ANGLED SLOT **GROOVED, STRAIGHT SLOT**
Weight:.....1.9 oz (54 g) **Weight:**.....1.8 oz (51 g)
 SM12201 \$10.95 SM12401 \$12.95

BERRY COMPLIANT



STEEL BRAKE BARS MADE IN THE USA

This 1" Tubular Stainless Steel Brake Bar features an angled slot. Using stainless steel means that the bar will last longer and will not leave the residual aluminum streaks on your rope like the aluminum alternatives. The angled slot helps keep bars still once it has been snapped in place.

- Key Features:**
- Stainless Steel

Height: 1.0" (2.5 cm) **Length:**.....2.45" (6.2 cm)
Width:..... 1.0" (2.5 cm) **Weight:**.....2.8 oz (80 g)

1" ANGLED BRAKE BAR

SM12010 \$19.95

Angled slot brake bars formed in a "U" shape. Stainless steel bars will not leave aluminum streaks on your rope and will last longer than aluminum bars. Available with or without training groove.

Height: 0.86" (2.2 cm) **Length:**.....2.70" (6.9 cm)
Width:.....0.86" (2.2 cm) **Weight:**.....1.7 oz (48 g)

BRAKE BAR, ANGLED SLOT

SM12500 \$13.50

BERRY COMPLIANT

BRAKE BAR ANGLED SLOT W/TRAINING GROOVE

SM12501 \$13.50



PMI® BAR TENDER MADE IN THE USA

Store your brake bar rack in this handy pouch to keep bars together and minimize the jingle factor when not in use. The PMI® Bar-Tender fits any size rack, with or without a hyper bar.

- Key Features:**
- Fits any size rack • 4" x 8"
 - Quick release buckle and cinch tight
 - Velcro® closure
 - Cordura® sheath

Width:.....4.0" (10.2 cm) **Weight:**.....1.5 oz (42 g)
Length:.....8.0" (20.3 cm)

Red ●
 SG51167 \$14.00



SMC/RA RESCUE 8

One of the most popular full-sized descenders used by professionals throughout the rescue, fire service, and police/tactical markets for years. Solid aluminum, this heat treated 8 is a staple in your rescue bag.

- FIRE RESCUE
- ROPES COURSE
- WILDERNESS RESCUE
- ROPE RESCUE

Key Features:

- Solid heat treated aluminum
- Hard-anodized finish
- Choose from grey or black
- Carabiner hole functions as a sticht plate for 1/2" rope

NFPA (WITH EARS)

Height: 0.50" (1.3 cm) **Weight:** 6.5 oz (184 g)
Width: 5.25" (13.3 cm) **Max Rope Size:** 16 mm
Length: 6.16" (15.6 cm) **MBS:** 32 kN (7194 lbf)

Black ● SM128701N \$62.00 Grey ● SM128702N \$62.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017), G (FOR ROPES 11 MM - 16 MM)
 NFPA 1983 (2012), T (FOR ROPES 9.5 MM - 12.5 MM)



PMI® LARGE STEEL

RESCUE 8

The classic descender for ropework, the figure 8 is perhaps the most widely recognized component of all vertical gear. This XL steel version from PMI® is designed for maximum wear and versatility. You can expect it to provide hundreds of hours of impeccable performance in just about any environment.

- FIRE RESCUE
- ROPE RESCUE

Key Features

- Accepts single or double wrapping braking
- Works with rope diameters up to 16 mm (5/8"). Bottom hole can be used as a sticht plate

Height: 0.50" (1.3 cm) **Weight:** 1.5 lbs (680 g)
Width: 6.75" (17.1 cm) **Max Rope Size:** 16 mm
Length: 6.75" (17.1 cm) **MBS:** 28 kN (6295 lbf)

HD26100 \$85.50

BERRY COMPLIANT



SMC MOUNTAINEERING 8

Easy to rig and handle when wearing gloves, this descender has smooth action on belay or rappel. Works well with either single or double ropes from 8 mm to 12.5 mm. Additional friction is gained by increasing the number of wraps.

- ARBORIST
- ROPES COURSE
- OUTDOOR CLIMBING

Key Features:

- Effective for either single or double wrap braking
- Works with 8 mm to 12.5 mm
- Bottom hole can be used as a sticht plate
- High quality aircraft grade 6061 aluminum

Height: 0.38" (9.0 mm) **Weight:** 2.8 oz (79 g)
Width: 2.96" (7.5 cm) **MBS:** 27 kN (6070 lbf)
Length: 4.62" (11.7 cm)

Black ● SM81700 \$15.95 Blue ● SM81702 \$15.95

BERRY COMPLIANT



SMC/RA LARGE FIGURE 8

Larger version of the popular Rescue 8 with “ears”. Made for ropes up to 5/8” (16 mm).

Key Features:

- Ears to prevent girth hitching

Max Rope Size: 16 mm **Length:**.....7.15” (18.2 cm)
Height: 0.50” (1.3 mm) **Weight:**..... 8.0 oz (227 g)
Width:.....6.40” (16.3 cm) **MBS:** 32 kN (7194 lbf)

Grey ●
 SM142000 \$79.00

BERRY COMPLIANT



SMC ESCAPE 8

When easy application and removal of an escape descender is desired, the SMC Escape 8 is a convenient choice. Familiar figure 8 shape is modified and optimized for descending on small diameter ropes.

Key Features:

- Compact
- Lightweight

Max Rope Size: 13 mm **Length:**.....2.80” (7.1 cm)
Height:0.38” (9 mm) **Weight:**.....1.7 oz (48 g)
Width:.....2.73” (6.9 cm) **MBS:** 14 kN (3147 lbf)

Gold ● Black ●
 SM126501N \$25.00 SM126502N \$25.00

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2012),E (FOR ROPES 7.5MM-9.5MM)



SMC DESCENT CONTROL 8



The Descent Control 8 provides exceptional control. This descender performs well in repetitive rappelling and descending environments. The unique shape prevents the un-weighted end of the rope from rubbing against the rope passing around the neck of the descender. As with all SMC products, welding is done by aircraft certified welders.

Key Features:

- Stainless steel wear-resistant surface
- Lightweight
- Works with 8 mm to 12.5 mm

Height:0.38” (9 mm) **Weight:**..... 7.5 oz (213 g)
Width:.....3.61” (9.2 cm) **MBS:** 89 kN (20000 lbf)
Length:.....5.18” (13.2 cm)

Bright ●
 SM113000 \$75.00

BERRY COMPLIANT

SELECTING A LOWERING DEVICE/DESCENDER

1. Confirm compatibility of descender with rope diameter.
2. The descender should create sufficient friction to provide absolute control.
3. Test the descender with hardware, equipment, and gloves typically worn.
4. Know how to lock the descender off so that you can secure yourself and remain stopped on the rope with hands off the device.
5. Be sure the descender is strong enough to have an adequate safety factor.
6. Select a descender with variable friction for long descents.
7. Ideally, a descender should be able to also function as a lowering device.



TERRADAPTOR™ TRIPOD SYSTEM

The complete TerrAdaptor™ Tripod System (SM230100N) includes everything you need to set up an NFPA configuration. All of the revolutionary parts come divided into three bags to make transport into the field easy for your whole Team. The bags are also great for storing on any rescue rig.

TERRADAPTOR™ TRIPOD SYSTEM MADE IN THE USA

Multiple configurations of the TerrAdaptor™ Portable Anchor System can be built from various standard system components. The primary system revolves around the TerrAdaptor™ Tripod System (SM230100N). This system includes all of the necessary parts to assemble a standard symmetric tripod that provides the ability to reach a height of approximately 10 ft, and can be used in a Gin Pole or Bi-Pod configuration. The system comes packaged in three compact packable bags to make it easy to "grab your bags and go" as well as store the System together in an organized manner.

To transition your Tripod to a Quadpod System, you can purchase the TerrAdaptor™ Quadpod Attachment Kit (SM230105). This kit provides the fourth leg and attachment pieces necessary to transition your tripod into a Quadpod.

If your needs are fairly simple and a single gin pole is the best solution for your situation, you can purchase the TerrAdaptor™ Gin Pole Kit (SM230106). This kit includes a full leg kit to reach approximately 10 feet in height adjustability.

For those who typically encounter environments that require more than 10 feet of height, additional leg extension pieces (apprx 4 ft in length) can be individually purchased for this use. This piece can also be used to provide one extra long leg if a tall "lazy leg" configuration, if desired.

-  GLOBAL
-  ROPE RESCUE
-  CONFINED SPACE
-  FIRE RESCUE
-  UTILITIES SAFETY
-  ROPE ACCESS

Key Features:

- TerrAdaptor™ Tripod Head
- 2 Offset Leg Clamps with 3 Load Locking Pins each
- Center Leg Clamp with 3 Load Locking Pins each
- Main Attachment Pin
- 3 Leg Kits complete with Modular Adaptor and Rocker Foot
- 3 Rope Hobble Sections
- Cotter Pin Kit
- Leg Coupling Pin
- 2 Lash Ring with 1 Coupling Pin each
- TerrAdaptor™ Head/ Accessory Bag
- 2 TerrAdaptor™ Leg Bag
- TerrAdaptor™ User Guide


Weight:..... 90.00 lbs (40.823 kg)

SM230100N \$4895.00

COMPLIANT: NFPA 1983 (2017),G CE EN795



TERRADAPTOR™

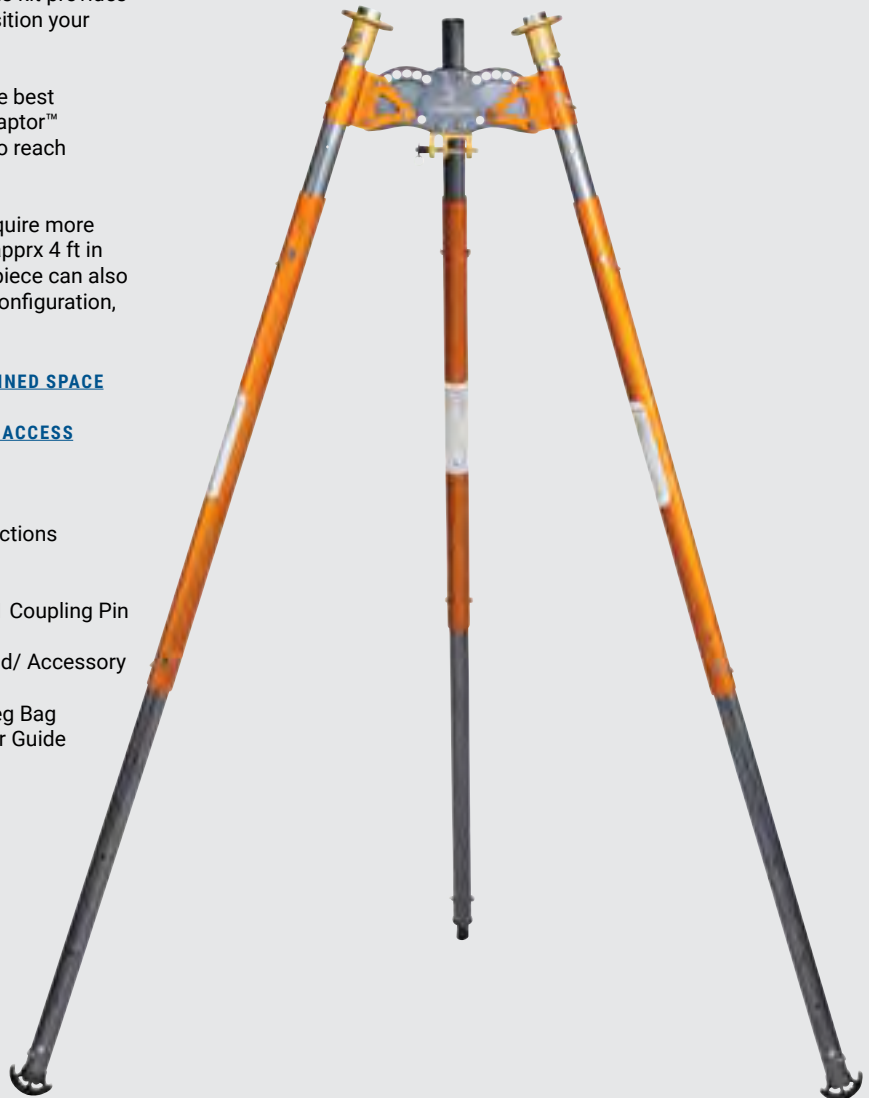

Rope

Webbing
and Cordage

Personal
Gear

Hardware

Solutions
and Kits

Patient
Care

Logistics and
Support Gear

Training and
Education



The TerrAdaptor™ includes one head bag and two leg bags



The exterior of the head bag has form fitting backpack straps for comfortable transport.



The interior of the head bag has dividers that protect the pieces from damage.



The TerrAdaptor™ legs are divided into two bags with backpack straps for easy transport.

What makes the TerrAdaptor unique?



Entirely unique to the TerrAdaptor™ is the ability to adjust the head angle in multiple directions.



Leg coupling pins provide a secure connection when the pin is fully inserted and the bail is properly secured.



The adaptability of the TerrAdaptor™ Tripod can be set up in any type terrain or environment.





TERRADAPTOR™ QUADPOD ATTACHMENT SYSTEM

Key Features:

- Quadpod Head Attachment
- Leg kit complete with Ball Foot, Hobble Plate & Basket, Center
- Leg Clamp with 3 Load Locking Pins each, Main Attachment Pin, Rope Hobble Section

SM230105 \$1429.00



TERRADAPTOR™ GIN POLE KIT

Key Features:

- 2 Lash Ring with Coupling Pins
- Leg kit complete with Ball Foot, Hobble Plate & Basket
- TerrAdaptor™ User Guide

SM230106 \$989.00

Rope

Webbing and Cordage

Personal Gear

Hardware

Solutions and Kits



TerrAdaptor™ Tripod System Configurations

Easy conversion of Tripod to multiple use formats.



A-Frame/Bipod
Great high directional for offsets and highlines.



Horizontal Span
Best for collapse or trench rescue.




Easel Leg Tripod
Easel leg provides extra support to A-Frame.

Patient Care

Logistics and Support Gear

Training and Education

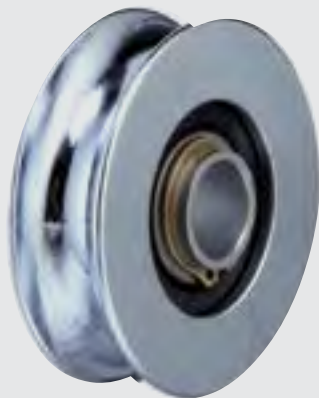

SHEAVE ASSEMBLY MADE IN THE USA

The TerrAdaptor™ Cable Sheave Assembly is specifically designed for use with the TerrAdaptor™ Portable Anchor System and the TerrAdaptor™ Cable Winch Bracket that allows you to utilize many of the commonly used cable winch systems. This Cable Sheave is a seamless connector maintaining the NFPA strength ratings while used in the multiple NFPA TerrAdaptor™ certified configurations.

Note: While this sheave may be used with either rope OR cable, it should not be used interchangeably. Once cable has been run through the sheave, it should not be used for rope.

Key Features

- Zinc Plated Hardened Alloy Steel Sealed Ball Bearings
- Supports up to 1/2" diameter cable or rope
- Compact and easy to use

Sheave: 2.00" **Max Rope Size:** 12.5 mm
Tread: 1.50" **Weight:** 4.2 oz (118 g)
Material: Zinc Plated **Axle Ball Bearing**

Bright ●
 SM230360 \$44.00



QUICKLASH MADE IN THE USA

The TerrAdaptor™ QuickLash has been designed to work exclusively on the TerrAdaptor™ grey tube as an anchor point. With the QuickLash, TerrAdaptor™ users will now be able to install an auxiliary anchor point before, during or after set up. Simply connect the QuickLash by inserting the quick release pin and you have a high strength single or multi direction tieback. This new QuickLash is ideal for attaching pulleys or other gear to assist with tie backs, redirects, and/or tie downs. Quick, easy and high strength make this TerrAdaptor™ accessory a must have for all rescue teams who have come to love the TerrAdaptor™.

Key Features:

- Attach to grey tubes before, during or after setting up TerrAdaptor
- Connection point for single or multi direction tieback
- Can be attached inside of leg and used to tie TerrAdaptor down for stability
- Can be used as attachment point for hanging pulleys or other gear
- Can be attached at the foot connection point
- 30 kN strength when loaded straight along major axis
- 15 kN when strength when pulled to side at 90 degrees

MBS: 30 kN (6744 lbf) **Height:** 0.75" (1.9 cm)
Major Axis: 30 kN (6744 lbf) **Width:** 2.94" (7.5 cm)
Minor Axis: 15 kN (3372 lbf) **Length:** 4.42" (11.2 cm)
Height: 0.75" (1.9 cm)

Gold ●
 SM230370 \$53.00

LASH RING KIT MADE IN THE USA


SM230230 \$64.00

TERRADAPTOR™ ORANGE MID-TUBE LEG EXTENSION MADE IN THE USA

The Orange Mid-Tube is the part you'll need to extend the lazy leg of the TerrAdaptor™ to maximize its length. You will also need additional Leg Coupling Pins (SM230301).

Width:..... 2.50" (6.4 cm) **Length:**..... 48.0"

SM230107 \$199.00

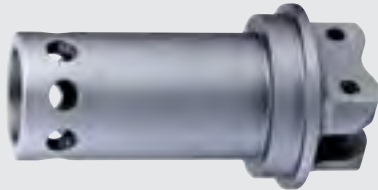

MODULAR ADAPTOR MADE IN THE USA

The new Modular Adaptor provides a secure platform for various new foot options. Tools to replace/interchange the feet are provided with the adaptor.

Key Features:

- Fully compatible with the existing TerrAdaptor™ leg tubes
- Tighter fit with the existing grey and orange TerrAdaptor™ leg tubes
- Rotates in 45 degree increments to achieve the best foot placement

MBS: 30 kN (6744 lbf) **Length:**..... 4.70" (11.9 cm)
Height: 2.50" (6.4 cm) **Weight:**..... 10.7 oz (302 g)
Width: 2.50" (6.4 cm)

Black ●
SM230540 \$83.00



TALON FOOT MADE IN THE USA

The new Talon Foot includes two spikes which allow the feet to be perched on edges of walls and catwalks, or they may also be lashed securely to pipes, beams, and rails. The steel tips of the foot may be sharpened or replaced.

Key Features:

- Lash points are still accessible when spikes are fully engaged
- Longer spike penetrates deeply for secure placement
- Shorter spike provides additional security against foot movement

MBS: 30 kN (6744 lbf) **Length:**..... 4.88" (12.4 cm)
Height: 0.50" (1.3 cm) **Weight:**..... 5.7 oz (161 g)
Width: 4.11" (10.4 cm)

Black ●
SM230510 \$42.00

BERRY COMPLIANT



ROCKER FOOT MADE IN THE USA

The new Rocker Foot is the next generation of the Ball Foot – it provides more surface area on the ground than the previous Ball Foot.

Key Features:

- Lean angles are greater
- Three full-size lash points are standard
- Lash points may be easily clipped at extreme lean angles

MBS: 30 kN (6744 lbf) **Length:**..... 4.54" (11.5 cm)
Height: 1.46" (3.7 cm) **Weight:**..... 6.7 oz (191 g)
Width: 2.40" (6.1 cm)

Black ●
SM230500 \$42.00



ARTICULATING FOOT MADE IN THE USA

The new Articulating Foot swivels on a stainless steel ball. For extreme wide leg angles, the foot can rotate 90 degrees to the flat position.

Key Features:

- Rubber pad allows use on surfaces such as concrete
- Foot may be lashed or clipped to other objects using three large holes
- Foot may be attached to a surface with screws, bolts, or spikes

MBS: 30 kN (6744 lbf) **Length:**..... 3.96" (10.1 cm)
Height: 4.40" (11.2 cm) **Weight:**..... 1.02 lbs (460 g)
Width: 3.96" (10.1 cm)

Black ●
SM230530 \$129.00

BERRY COMPLIANT

TERRADAPTOR™

WINCH SYSTEM MADE IN THE USA

The new SMC TerrAdaptor™ Capstan Winch System mounts on any grey leg tube section in any position on the TerrAdaptor™ multi pod. A stainless steel rope guide ensures that the rope enters the capstan at the correct angle for the greatest grip. Clip points on the front and rear of the bracket can be used for progress capture devices such as a rope grab or a prussik.

 FIRE RESCUE

 UTILITIES SAFETY

 CONFINED SPACE

 ROPE RESCUE

Key Features:

- Made from anodized aluminum
- Includes a Harken 40.2ST two speed, self-trailing capstan winch
- Stainless steel rope guide
- Designed to work with progress capture devices
- Engineered TerrAdaptor™ winch bracket

Height: 5.40" (13.7 cm)

Length: 11.25" (28.6 cm)

Width: 5.90" (15.0 cm)

Weight: 8.55 lbs (3.878 kg)

Black ●

SM230552 \$2169.00

[Special Order](#)



TERRADAPTOR™ CAPSTAN WINCH

BRACKET MADE IN THE USA

The new Capstan Winch Bracket is designed for use with the Harken 40.2ST Capstan Winch. This bracket is predrilled and includes all hardware for mounting the Capstan. It may be mounted on any grey leg tube section on the TerrAdaptor™.

Key Features:

- Stainless rope guide ensures rope enters capstan at the correct angle
- Clip points are included for use of progress capture devices
- Anodized Aluminum

MBS: 30 kN (6744 lbf)

Length: 11.25" (28.6 cm)

Height: 2.40" (6.1 cm)

Weight: 3.55 lbs (1.610 kg)

Width: 5.90" (15.0 cm)

Black ●

SM230551 \$172.00

TERRADAPTOR™ STANDARD WINCH

BRACKET MADE IN THE USA

The new Standard Winch Bracket is pre-tapped for mounting most Tractel and DBI/Sala cable work winches. In addition, other cable or rope winch models can be mounted per the manufacturer's instructions. It may be mounted on any grey leg tube section on the TerrAdaptor™.

Key Features:

- Clip points are included for use of progress capture devices
- Anodized Aluminum

MBS: 30 kN (6744 lbf)

Length: 11.25" (28.6 cm)

Height: 2.40" (6.1 cm)

Weight: 3.06 lbs (1.379 kg)

Width: 3.50" (8.9 cm)

Black ●

SM230550 \$122.00





VECTOR LOAD MANAGEMENT SYSTEM

The Vector Edge and Load Management System has been designed and engineered as a light-weight, portable tool for use in industrial, mountain and urban rescue environments. When combined with high strength - low stretch cord, quality lifesafety rope, lightweight pulleys and carabiners, the Vector provides rescuers with a versatile resource which can reduce risk and go virtually anywhere.

- GLOBAL
- ROPE RESCUE
- CONFINED SPACE
- FIRE RESCUE
- UTILITIES SAFETY

Length:.....37.74" (96.3 cm) **Material:**Aerospace-grade
Weight:..... 3.04 lbs (1.380 kg) Aluminum

SM290010 \$489.00

SKED® EVAC TRIPOD

The small head and extra-long aluminum legs make this tripod the perfect choice for simplicity and performance. When fully extended, the head is ten feet high and the tripod can support a load up to 5280 lbf. The load capacity increases as the leg extension is reduced.

- GLOBAL
- ROPE RESCUE
- CONFINED SPACE
- FIRE RESCUE
- UTILITIES SAFETY

Key Features:

- Legs are adjustable in 5" increments
- Tripod legs are secured with chains to prevent them from spreading under load
- 3 anchor points
- Winches and other attachments available
- Fully extended height of 10 ft at the anchors

TRIPOD

Weight:..... 71.00 lbs (32.200 kg)

SK700 \$1692.70 **Special Order**

COMPLIANT: CE EN 795

TRIPOD CASE

Weight:..... 4.00 lbs (1.810 kg)

SK701 \$111.40 **Special Order**

Vinyl transport bag for storing and carrying your Sked® Evac Tripod (SK700). Features heavy duty vinyl coated nylon material and an extra long zipper along its full length and across it's ends to facilitate easy repackaging. It has a pocket inside in the center to store the bag of chain which comes with the tripod, preventing the chain from sliding to one end when the tripod is carried. There are handles in the center and on each end of the bag. This bag has a 9" diameter and a 7'1" length, and will make nearly any brand of tripod easier to carry.



PMI® 1/2" RB ANCHOR MADE IN THE USA

This anchor can be removed and reused at any desired location. It features unmatched safety, ease of use, and speed. The RB Anchor works in horizontal, vertical, and overhead/ceiling surfaces. Costly engineering inserts are not required. This anchor can be used for restraint, work positioning and more. This product is designed for use in concrete or rock only.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- Spring is zinc plated steel
- Swage is zinc plated copper
- Trigger is aluminum alloy
- End termination, spoons, and stop sleeves are stainless steel
- Main cable is 7×19 galvanized cable
- Do not use for fall protection

MBS: 12 kN (2700 lbf)
Working Load Limit: 2.2 kN
 (500 ibf)
Height: 1.25" (3.2 cm)

Length:.....9.0" (22.9 cm)
Width:.....3.65" (9.3 cm)
Weight:.....3.2 oz (91 g)

HD26233 \$81.75



PMI® DROP THROUGH ANCHOR KIT MADE IN THE USA

An ANSI Z359 anchorage connector that be used with steel grates or holes in concrete.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- 3/16" Steel plate with a 8 1/2' cable attached to a swiveling D-Ring
- Drops through the opening in any 1 3/4"- 2" Substrate
- Used only as an overhead anchor in concrete floors, steel girders, steel grates, and other applications

MBS: 50 kN (11240 lbf)
Height: 0.50" (1.3 cm)

Length:.....7.00" (17.8 cm)
Weight:..... 11.4 oz (323 g)

HD26232 \$107.25



PMI® 3/4" MULTI-USE REMOVABLE CONCRETE ANCHOR MADE IN THE USA

Working Load Limit: 1000 lbf
Length:.....11.5" (29.3 cm)

Width:.....2.0" (5.1 cm)
Weight:..... 8.0 oz (226 g)

HD26242 \$130.75

COMPLIANT: EN 795



1" FALL PROTECTION RB ANCHOR

MBS: 12 kN (2700 lbf)
Working Load Limit: 2.2 kN
 (500 ibf)
Height: 1.25" (3.2 cm)

Length:.....9.0" (22.9 cm)
Width:.....3.65" (9.3 cm)
Weight:.....3.2 oz (91 g)

HD26224 \$270.00

COMPLIANT: EN 795 ANSI Z359.1 (2007)



PMI® 3/4" TOGGLE LOK ANCHOR MADE IN THE USA

This innovative anchor sets itself apart from the competition. It features unmatched safety, ease of use, and versatility. This anchor can be removed and used again. The Toggle works in horizontal, vertical, and overhead surfaces. It also works in either precast concrete or steel flanges. Costly engineering inserts are not required. This anchor can be used for fall protection, life line systems, restraint, work positioning, tie back anchors, and more.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features

- Works in both shear and tensile loads
- Spring is zinc plated steel
- Swage is zinc plated copper
- Hole plug is aluminum alloy
- Cable sheath is plastic
- Main cable is 7 × 19 galvanized cable

MBS: 50 kN (11240 lbf)
Height: 0.50" (1.3 cm)

Length:.....7.00" (17.8 cm)
Weight:..... 11.4 oz (323 g)

HD26225 \$142.25

COMPLIANT: EN 795 ANSI Z359.1 (2007)



STEEL O RING

Simple, low cost focal point for rigging. This is a “bombproof” forged steel ring that is ideal for any multi-directional loading situation.



MBS: 44 kN (10000 lbf) **ID:** 3.00” (7.6 cm)
Height: 0.50” (1.3 cm) **Weight:** 9.0 oz (256 g)
OD: 4.00” (10.2 cm)

HD26049 \$14.00



SMC DESCENDING RING MADE IN THE USA

This inexpensive aluminum ring is intended to be left at the top of a rappel in place of a carabiner to facilitate rope recovery. More creative applications abound in rescue rigging.



MBS: 15 kN (3372 lbf) **OD:** 2.00” (5.1 cm)
Height: 0.30” (8.0 mm) **ID:** 1.50” (3.8 cm)
Length: 2.0” (5.1 cm) **Weight:** 0.4 oz (11 g)
Width: 2.0” (5.1 cm)

Natural
 SM81600 \$3.75



SMC SWIVEL MADE IN THE USA

This rescue swivel is a high performance piece of gear with incredibly smooth action and a beautiful feel and finish. The holes are sized to work with rescue carabiners, and allow the lock sleeves to rotate through the holes. The heat-treated axle and a sealed high efficiency ball bearing ensures a smooth rotation. Compact for confined space and for awkward hauling situations. Smooth and rounded sides prevent catching on rocks, litters, or other components.



Key Features:

- Lightweight
- Anodized aluminum
- Sealed bearing
- Heat treated axle
- For ropes 9.5 mm–16 mm

MBS: 44 kN (10000 lbf) **Length:** 3.50” (8.9 cm)
Height: 1.30” (3.3 cm) **Weight:** 4.5 oz (128 g)
Width: 2.00” (5.1 cm)

Blue & Charcoal Black
 SM136000N \$99.00 SM136007N \$99.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2017), G**



SMC RIGGING RING MADE IN THE USA

The SMC Rigging Ring is the strongest aluminum ring of its size on the market. The SMC Rigging Ring was designed as the ultimate climbing accessory and can be used in conjunction with anchor systems, haul systems, or as a connection point, providing that missing link which is often needed. The inside diameter will accommodate three standard sized carabiners.



MBS: 32 kN (7194 lbf) **OD:** 1.70” (4.3 cm)
Height: 0.50” (1.3 cm) **ID:** 1.10” (2.8 cm)
Weight: 0.9 oz (26 g)

Grey Red
 SM81503 \$5.95 SM81505 \$5.95



SMC NFPA RIGGING

PLATE MADE IN THE USA



Half the size of the bigger plates on the market, yet just as strong and with oversized holes to accommodate more gear. Contoured edges are easy on ropes, webbing and carabiners. Each oval hole will easily accept 2 large carabiners while a large center hole accepts numerous connections.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- Anodized aluminum
- Holes are numbered for quick identification
- For ropes 9.5–16 mm

MBS: 50 kN (11240 lbf) **Length:**.....7.00" (17.8 cm)
Height: 0.50" (1.3 cm) **Weight:**..... 11.4 oz (323 g)
Width:.....5.30" (13.5 cm)

Red ●
 SM130005 \$62.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2017), G**

SMC MINI RIGGING

PLATE MADE IN THE USA



One of the lightest yet strongest mini-rigging plates on the market, built with high quality 6061 aircraft grade aluminum for strength, durability, corrosion resistance, and years of reliability. Designed to serve as either a belay device or a collection point for multiple anchors and/or rigging points - but that certainly doesn't exclude it from a host of other tasks.

- ARBORIST
- ROPE ACCESS
- WILDERNESS RESCUE
- FIRE RESCUE
- CONFINED SPACE
- ROPE RESCUE
- CAVE RESCUE


Key Features:

- Large carabiner holes

MBS: 36 kN (8093 lbf) **Length:**.....3.75" (9.5 cm)
Height:0.37" (9.4 cm) **Weight:**.....3.0 oz (80 g)
Width:.....2.93" (7.4 cm)

Black ● Blue ●
 SM130301N \$33.00 SM130302N \$33.00

BERRY COMPLIANT **COMPLIANT: NFPA 1983 (2012), G**

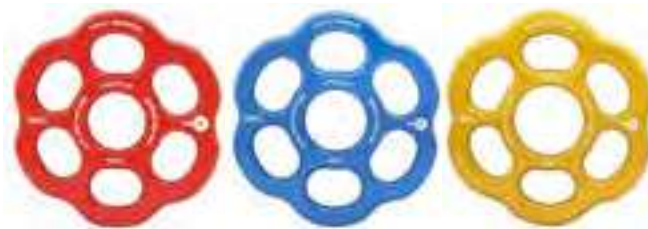

ISC HALO™ RIGGING

PLATE MADE IN THE USA



ISC HALO™ Rigging Plates form part of a compatible system and were developed to match the ratings on our Carabiners and Prusik pulleys, at 40kN/ (8992lbf), 50kN (11,240lbf) and 70kN (15,736lbf). If compatible components are used in a system it takes away some of the guesswork involved with deciding which is the 'weak link'. HALO™ Rigging Plates are machined from superior grade Aluminium. HALO™ Plates feature a central hole, surrounded by six equi-spaced apertures, each of which is capable of accommodating multiple carabiner connections. This allows the user multiple loading options. All holes have radiused edges, to reduce rope/webbing wear and also to reduce wear from loads which are applied by carabiners. Each plate is manufactured from aerospace grade Aluminium and feature uniquely shaped apertures which allow for loading with multiple Carabiners simultaneously. CNC machined radiused edges make the apertures rope and webbing friendly.

Key Features:

- Aerospace Grade Aluminum

SMALL

Outer Diameter:..... 115 mm
 (4 1/2")
Central Hole Diameter:..... 29 mm
 (1 2/16")
Aperture Size (approx.): .27×20 mm
 (11/16"×25/32")
Weight:..... 118g (4oz)

MEDIUM

Outer Diameter:..... 144 mm
 (5 10/16")
Central Hole Diameter:..... 39 mm
 (1 1/2")
Aperture Size (approx.): 36×24 mm
 (1 7/16"×15/16")
Weight:..... 221g (8oz)

LARGE

Outer Diameter:..... 165 mm
 (6 1/2")
Central Hole Diameter:..... 51.9 mm
 (1 1/32")
Aperture Size (approx.): .39×25 mm
 (1 1/2"×2 1/32")
Weight:.....377g (13oz)

Red ●
 HD26298 \$29.80

Blue ●
 HD26299 \$46.81

Yellow ●
 HD26300 \$97.24

COMPLIANT: CE 0120 AND NFPA 1983 (17ED)G





PMI® CHOKER SLING

Wrapped around a beam, the new PMI® Choker sling provides a quick and safe anchor. An extra piece of webbing is sewn on the entire length of the sling to protect it from sharp edges and prolong its life.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- Fast connection
- Extra layer of webbing for protection
- Cinch strap for easy closure

Basket (U):.....48.7 kN **Choker:**20.8 kN
End-to-end:22.2 kN **Material:**Nylon

2 FT (61 CM) Weight:14.4 oz (408 g) SG51282 \$24.00	3 FT (100 CM) Weight:15.2 oz (431 g) SG51213 \$37.50	4 FT (125 CM) Weight:1.05 lbs (476 g) SG51242 \$38.00
--	---	--

6 FT (200 CM) Weight:1.20 lbs (544 g) SG51214 \$48.00	8 FT (250 CM) Weight:1.35 lbs (612 g) SG51243 \$57.00
--	--

COMPLIANT: NFPA 1983 (2017), G ANSI Z359.18 (2017)



PMI® VARI-RIGGER

A simple adjustable strap with D-rings on each end. Double around a suitable anchor for a quick rigging point to use as a variable length tether.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- High strength D-rings on both ends
- Buckles slip at 22 kN (5000 lbf)
- Adjustable length:..... 24" to 96"
- Quick, adjustable rigging

MBS: 22 kN (5000 lbf) **Weight:**..... 1.50 lbs (680 g)
Material:Nylon

Black ●
 SG51033 \$87.00

PMI® ANCHOR SLING

Setting a strong and secure anchor is easy with the right tools. Adding PMI® Anchor Slings to your anchor kit gets the job done quickly and efficiently. Choose from 3 different lengths for all your rigging applications.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- 1 3/4" webbing
- Steel D-rings on both ends
- Fast connection
- 3 different lengths

Basket (U):.....49.2 kN **Choker:** 22.6 kN
End-to-end: 28.7 kN **Material:** Nylon

3 FT (100 CM) Width: 1.75" (4.4 cm) Length:..... 36.00" (100.0 cm) Weight:..... 11.0 oz (311 g)	4 FT (150 CM) Width: 1.75" (4.4 cm) Length:..... 48.00" (121.9 cm) Weight:..... 12.0 oz (354 g)	6 FT (200 CM) Width: 1.75" (4.4 cm) Length:..... 72.0" (182.9 cm) Weight:..... 14.0 oz (410 g)
---	---	--

SG51029 \$47.00 SG51030 \$50.00 SG51031 \$54.00

COMPLIANT: NFPA 1983 (2017), G ANSI Z359.18 (2017)



SKEDCO SOFT ANCHOR SLING



The Skedco Soft Anchor Sling is a perfect utility strap suitable for many purposes. With loops sewn on each end, this strap is lightweight and easy to use. The 6 ft model is constructed of 16,000 lbf tensile strength webbing and the 8, 12, and 20 ft long models are of 20,000 lbf webbing.

- ROPE RESCUE
- CONFINED SPACE
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- 3 lengths
- 3" high tensile strength webbing
- Lightweight

MBS: 22 kN (5000 lbf) **Weight:**..... 1.50 lbs (680 g)

8 FT Length:..... 96.0" (243.8 cm) Weight:..... 2.0 lbs (907 g)	12 FT Length:..... 144.0" (365.8 cm) Weight:..... 2.38 lbs (1.089 kg)	20 FT Length:..... 240.0" (609.6 cm) Weight:..... 2.63 lbs (1.179 kg)
--	--	--

SK9118 \$46.25
Special Order

SK91112 \$54.63
Special Order

SK91120 \$69.15
Special Order



PMI® WIRE ROPE SLING MADE IN THE USA

PMI® wire rope slings are excellent temporary and semi permanent ANSI certified anchors. They are available in 3 and 6 foot lengths with various terminations for versatility on the job or in a rescue kit.

- ROPE RESCUE**
- CONFINED SPACE**
- FALL PROTECTION**
- ROPE ACCESS**

Key Features:

- ANSI Z359 certified
- 5000 lbs breaking strength
- Iridescent blue tubing for easier cable inspections
- Available in 3 and 6 foot sizes

MBS: 22 kN (5000 lbf)

3 FT

Length:.....36.0" (91.4 cm)
Weight:..... 1.00 lbs (453 g)

HD26236 \$48.50

6 FT

Length:.....72.0" (182.9 cm)
Weight:..... 1.45 lbs (657 g)

HD26237 \$62.75

COMPLIANT: ANSI Z359.1 (2007)



PMI® ROLLER SLING MADE IN THE USA

ANSI Z359 certified anchorage connector with sealed ball bearing rollers and spaces for ease while working on bridges or around pipe where other anchor points aren't prevalent. Steel carabiner not included.

- ROPE RESCUE**
- CONFINED SPACE**
- FALL PROTECTION**
- ROPE ACCESS**

Key Features:

- ANSI Z359 certified
- 5000 lbs breaking strength
- Iridescent blue tubing for easier cable inspections
- Available in 3 and 6 foot sizes

MBS: 22 kN (5000 lbf)

HD26246 \$219.00

HD26247 \$277.50

COMPLIANT: ANSI Z359.1 (2007)



PMI® WIRE ROPE CHOKER SLING MADE IN THE USA

ANSI Z359 certified anchorage connector with iridescent blue tubing for easier cable inspections. Has offset thimbles so sling can be used in a choker configuration.

- ROPE RESCUE**
- CONFINED SPACE**
- FALL PROTECTION**
- ROPE ACCESS**

Key Features:

- ANSI Z359 certified
- 5000 lbs breaking strength
- Iridescent blue tubing for easier cable inspections
- Available in 3 and 6 foot sizes

MBS: 22 kN (5000 lbf)

3 FT

Length:.....36.0" (91.4 cm)
Weight:.....1.10 lbs (499 g)

HD26238 \$48.50

6 FT

Length:.....72.0" (182.9 cm)
Weight:..... 1.60 lbs (730 g)

HD26239 \$62.75

COMPLIANT: ANSI Z359.1 (2007)



TRACTEL BEAM CLAMP

This anchorage is designed to fit I-beams from 3" to 9.25". Simple installation, removable. Meets ANSI, CSA, and OSHA anchorage requirements.

Key Features:

- Rated for a one person load
- Removable
- Clamp is rated at 1 ton

MBS: 24 kN (5400 lbf) **Length:**..... 15.0" (38.1 cm)
Height: 6.0" (15.2 cm) **Weight:**..... 12.3 lbs (5.599 kg)
Width:..... 2.50" (6.4 cm)

HD26067 \$140.25

COMPLIANT: ANSI Z359.1 (2007) CSA



PMI® I BEAM TROLLEY

A removable and reusable rolling I-beam anchor, easy to place and remove. This anchor is designed to easily roll along the beam while trailing the worker.

- ROPE RESCUE
- UTILITIES SAFETY
- FALL PROTECTION
- ROPE ACCESS

Key Features:

- Works in both shear and tensile loads
- D-ring rotates 360 degrees
- D-ring flips 180 degrees
- Heavy gauge zinc plated, forged, heat treated alloy steel
- One concrete bolt included

MBS: 22 kN (5000 lbf)
Weight:..... 7,70 lbs (3,493 kg)

HD26243 \$375.95

COMPLIANT: ANSI Z359.1 (2007)



PMW HOOK MADE IN THE USA

Designed and precision-manufactured in the USA by veteran firefighter and craftsman Bill Pettey, the PMW Hooks are more than just simple window hooks. There are numerous ways to use the hook to make an anchorage, either over a window sill or around a secure point; it can also be used as a personal descender, or to make a rescue lower. *Discover the unique advantages of the PMW hook – now available in standard or compact dimensions.*

STANDARD

Weight:.....
Dimensions:
MBS: 5,000 lbf

Orange ●
 HD26285 \$90.00

COMPACT

Weight:.....
Dimensions:
MBS: 3,000 lbf

Orange ●
 HD26286 \$50.00



SOLUTIONS AND KITS

PMI offers complete pre-packaged solutions for Rescue at Height, Rope Access, and Fall Arrest. We take the guess work out of a situation and streamline your rescue and work life. Pre-packaged kits for Hauling, Emergency Bailout, and Personal Escape are also available to accommodate your needs.

Rescue and Evacuation Systems

All safety systems for work at height should include a plan for rescue. PMI Solutions offer a complete, ready-to-go kit for rescue in any industry or work situation.

The following criteria should be applied when evaluating a rescue system:

- 1) Rescuers should not be part of the anchor system.
- 2) In case of operator panic, the lowering or raising device must be "fail-safe".
- 3) Systems should be simple to deploy and operate.
- 4) Subject attachment should be secure.
- 5) Additional parts are not necessary for rope devices when changing from one mode of operation to another

Work at Height Solutions

Many work at height projects involve descending, ascending, horizontal traverses, or moving heavy equipment. Each of the PMI Solutions are ready to use, easy to adjust, and compatible with other equipment.

The following criteria should be applied when evaluating work at height systems:

- 1) Solution must include the required pieces for the job.
- 2) Each component must be compatible with other system components.
- 3) Solutions should be simple to operate and deploy.
- 4) Equipment attachment should be easy and effective.
- 5) Proper training (find out more at www.vertical-rescuesolutions.com).

PMI® RESCUE CACHE PRO

The PMI Rescue Cache Pro saves the professional rope rescuer the hassle of assembling components for a basic high angle rope rescue system. Featuring the SMC NFPA Brake Rack for the lowering component, this kit is packed into a custom bag for both easier storage and quick deployment. Rope not included.

 FIRE RESCUE
  ROPE RESCUE
  CONFINED SPACE

System Features:

- 1 – Bag with backpack straps
- 2 – 3 ft Supermantles
- 1 – SMC Flex
- 2 – 20 ft of 1" Tubular Webbing
- 2 – 6 ft PMI Anchor Slings
- 1 – Large PMI Rope Pad
- 5 – SMC 2" PMP Single Pulleys
- 2 – Radium Release Hitch Kits
- 16 – SMC FP Lite Alloy Carabiners
- 5 – 20" Sewn Prusik Cord Loops
- 1 – 26" Sewn Prusik Cord Loop
- 1 – SMC NFPA Straight Eye Rack Assembly
- 1 – SMC NFPA Rigging Plate
- 1 – SMC Oval Carabiner
- 5 – SMC Swivels

Height:6.50" (16.5 cm) **Width:**15.50" (39.4 cm)
Length:20.50" (52.1 cm) **Weight:**32.50 lbs (14.742 kg)

KT36178 \$2715.00



PMI® RESCUE CACHE AUTOLOCK PRO

Featuring the NFPA 1983 G Rated PMI/ISC Autolocking D5 descender for use with 12.5 mm (1/2") rope (not included), the Rescue Cache Autolock Pro Kit is optimized for the most up-to-date twin-tensioned rope rescue techniques. All the gear you need to effect a high angle rescue are included in this custom made bag for easy storage and deployment.

 FIRE RESCUE
  ROPE RESCUE
  CONFINED SPACE

System Features:

- 1 – Bag with backpack straps
- 2 – PMI® D5 by ISC
- 2 – 3 ft Supermantles
- 1 – SMC Flex
- 2 – 20 ft of 1" Tubular Webbing
- 2 – 6 ft PMI Anchor Slings
- 1 – Large PMI Rope Pad
- 3 – SMC 2" PMP Single Pulleys
- 1 – SMC 2" PMP Double Pulley
- 9 – SMC FP Lite Alloy Carabiners
- 2 – 20" Sewn Prusik Cord Loops
- 4 – SMC Swivels

Height:6.50" (16.5 cm) **W Width:**15.50" (39.4 cm)
Length:20.50" (52.1 cm) **Weight:**25.0 lbs (11.340 kg)

KT36179 \$2715.00



PMW URGENT

ESCAPE KIT MADE IN THE USA

Featuring multi-purpose PMW Escape Hooks, this kit is designed for fast egress in a true emergency. Risks associated with getting hung-up or stuck during descent are eliminated, as there is no autolocking descender. Kit includes carry bag, rope, autolocking carabiner, and two hooks – one large and one small. Either hook may be used as an anchor, and either hook may be used as a friction brake for descent or lowering. This is the most versatile personal escape kit available. Choose from two models: Urgent Escape Kit includes force-absorbing nylon rope while the Hot Urgent Escape Kit features PMI Element Technora Rope. Proper training required before use.

Key Features:

- Made in USA Multi-purpose system

* Custom Rope Lengths Available

URGENT

System Features:

- 50' PER Nylon Rope
- SMC Kinetic Carabiner
- PMW Hook – Small
- PMW Hook – Large

KT36185 \$343.75

HOT URGENT

- 50' Element Technora Rope
- SMC Kinetic Carabiner
- PMW Hook – Small
- PMW Hook – Large

KT36186 \$390.00



HIGHLINE CACHE PRO

Rigging a highline is easier when all the gear you need is in one place. This Highline Cache conveniently packages essential components into one easy-to-carry bag, complete with backpack straps and a fold-out ground cloth.

System features

- PMI highline bag
- 4 SMC 2" aluminum pulleys,
- 1 SMC 3" single pmp
- 1 SMC kootenay knot passing pulley
- 14 SMC locking D carabiners
- 1 CE quick up Ascender – right
- 1 SMC rigging plate
- 1 SMC/ra figure 8 w/ears
- 8 mm green sewn prusik 2.5' and 8 mm red sewn prusik
- 3' accessory cord 3 mm
- Tubular webbing – orange
- 16 yards 1" nylon tubular webbing – fl. green

KT36183 \$1775.00



Rope

Webbing and Cordage

Personal Gear

Hardware

Solutions and Kits

Patient Care

Logistics and Support Gear

Training and Education

PMI® CRANE-TEK RESCUE SOLUTION

PMI® Crane-Tek Rescue Solution is designed to meet the requirements of workers in high places (ie cranes, etc) who are not wearing a harness but may need to evacuate themselves using an emergency harness and rope for controlled descent in the event of an emergency. The D4 Descender forms the foundation of this kit, allowing for immediate rope descent. The D4 Descender features a double-action safety mechanism that stops the user if they let go of the handle or if they pull the handle too hard in a panic. When the panic lock is engaged, simply turn the handle until it gets back into the lowering position and continue your descent.

FALL PROTECTION UTILITIES SAFETY TOWER WORK

System Features:

- 11 mm PMI® Extreme Pro Rope (25m, 66m, or 100m)
- 1 – 1m PMI® Wire Rope Sling
- 1 – PMI® D4 by ISC
- 1 – PMI® Advantage Helmet
- 1 – PMI® Hasty X Evacuation Seat
- 2 – SMC FP Lite Alloy Carabiner
- 1 – SMC ANSI Safety Lock Carabiner
- 1 – Carrying Bag

25M

66M

100M

KT36176 \$1320.00

KT36166 \$1400.00

KT36174 \$1460.00



PMI® TOWER-TEK RESCUE SOLUTION

PMI®'s Tower-Tek Rescue Solution is a tried and true, "plug-and-play" rescue solution designed and built to meet the demanding rescue needs of tower workers. Whether you need to perform self-rescue, tower-based coworker rescue, ground based coworker rescue or a pickoff rescue, the Tower-Tek gets the job done. Using ANSI compliant components, the Tower-Tek stresses a common sense approach to the complicated problem of tower rescue. As with any life safety or rescue equipment, proper training and documented refresher training on the PMI Tower-Tek Rescue Solution is strongly recommended.

FALL PROTECTION UTILITIES SAFETY TOWER WORK

System Features:

- 11 mm PMI® Extreme Pro Rope (25m, 100m or 122m)
- 1 – 1m PMI® Wire Rope Sling
- 1 – heightec® Hurricane Pro™
- 1 – PMI® D4 by ISC
- 1 – 2" SMC/RA Stainless Steel Pulley
- 1 – Casualty Attachment Sling
- 5 – SMC FP Lite Alloy Carabiners
- 1 – Pair of Rescue Shears
- 1 – Carrying Bag

25 M

100 M

122 M

KT36171 \$1135.00

KT36172 \$1280.00

KT36173 \$1320.00

PMI® FALL-TEK RESCUE SOLUTION

Rescuing a fallen and suspended coworker from their fall protection without putting the rescuer in harm's way can be a real challenge. But with the PMI® Fall-Tek Rescue Solution, a non-committal coworker rescue can be safely accomplished by using a telescoping pole to hook the suspended worker and then raise or lower them to safety. The Fall-Tek is rescue-ready and pre-rigged with ANSI compliant ropes and hardware- thereby eliminating the time spent on tying knots or setting up a complicated rigging system. Training on the PMI Fall-Tek Rescue Solution is strongly recommended. So whether you work at height in construction or general industry, this PMI Rescue Solution is for you!

FALL PROTECTION UTILITIES SAFETY TOWER WORK

System Features:

- 11 mm PMI® Extreme Pro Rope (25m, 50m, 66m, or 100m)
- 1 – 1m PMI® Wire Rope Sling
- 1 – heightec® Hurricane Pro™
- 1 – PMI® D4 by ISC
- 1 – 8' Hastings Pole with SureClip
- 1 – Casualty Attachment Sling
- 5 – SMC FP Lite Alloy Carabiners
- 1 – Pair of Rescue Shears
- 1 – CT Quick-Up Handled Ascender, Right Handed
- 1 – Carrying Bag

25 M

50 M

66 M

100 M

KT36168 \$2025.00

KT36169 \$2070.00

KT36170 \$2100.00

KT36175 \$2150.00

GRAIN EVACUATION

TOOL (G.E.T.)

PMI's new Grain Evacuation Tool – the GET Cofferd Dam Solution, is a complete rescue solution designed and manufactured by Montezuma Rescue Innovations. The GET is made up of six interlocking aluminum panels used to form a circle and isolate an entrapped person from the grain surrounding them. Included in the solution is the Grain Portr - a revolutionary tool used to quickly remove the grain inside the GET, thereby freeing the subject from the grain. Also included are probe poles that make a target ring surrounding the subject to accurately position the GET panels.

Key Features:

- Interlocking panels fit through the smaller openings found in the top of older style grain bins
- The GET contains two foot straps to help drive the panels into the grain
- The Grain Portr grain removal device can quickly remove grain inside the GET Cofferd Dam
- Probes convert into a target ring to position the GET around the subject
- The GET solution fits into a compact package for storage, or lowering into a grain elevator or bin

Height: 3.0" (7.6 cm) **Width:** 15.50" (39.4 cm)
Length: 59.75" (151.8 cm) **Weight:** 89.0 lbs (40.370 kg)

PE42191 \$4200.00



GRAIN PORTR

The Grain Portr works with any style cofferdam. Allows the rescuer to quickly remove grain from inside the cofferdam, thereby freeing the subject. Requires no electrical power. Very compact and lightweight making it ideal for use in a confined space such as a grain bin. No participation from the patient is required as it is when using buckets. Removes grain faster than a typical vacuum and creates very little dust, especially inside the cofferdam.

Key Features:

- Made from Aluminum
- Works with any Cofferdam
- Compact
- Lightweight

Height: 4.0" (10.2 cm) **Width:** 8.50" (21.6 cm)
Length: 54.0" (137.2 cm) **Weight:** 7.40 lbs (3.357 kg)

PE42192 \$480.00



Rope
Webbing and Cordage
Personal Gear
Hardware

Solutions and Kits

Patient Care

Logistics and Support Gear

Training and Education



FLEXIBLE SIDED LADDERS COMPACT

Flexible sided ladders are a cost effective, lightweight solution for temporary access to confined spaces and difficult to reach locations. Even with minimal training, ladders can easily be transported and rapidly deployed for use. Personnel utilizing ladders should always use a separate fall protection system for safety.

Construction:

The rungs are hollow tubes with a dowel insert. Rungs are secured to the side wire ropes with pins and resin. A pin is driven through the center of the rope into the dowel and set in resin to form a solid block inside the rung. A plastic cap is then pushed in to seal the rung end. Black rungs are cut to size and drilled before treatment to ensure that the alloy tube is 100% anodized.

Compact Ladders

General purpose ladder for ascending/descending. Used for applications such as manhole entry, caving, and access to lighting truss. With fitness and a little practice, they are easy to climb.

Key Features:

- Standard lengths are 5 m and 10 m
- Other lengths made to order
- Can be connected together for longer lengths
- Easy to carry and store
- Swaged eye ends
- Accessories available
- Two rung spacing options
- Rungs are 6.0" wide
- Aluminum rungs are 0.50" Diameter
- Requires a separate fall protection system

5 M LONG W/25 CM RUNG SPACING

Type Plain Finish Rung, 4 mm Galvanized Steel Cables, Swaged Eye Ends
Weight: 2.87 lbs (1.300 kg)

LD39001 \$276.00 [Special Order](#)

5 M LONG W/30 CM RUNG SPACING

Type Black Anodized Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends
Weight: 2.65 lbs (1.200 kg)

LD39042 \$310.00 [Special Order](#)

10 M LONG W/25 CM RUNG SPACING

Type Plain Finish Rung, 4 mm Galvanized Steel Cables, Swaged Eye Ends
Weight: 5.73 lbs (2.600 kg)

LD39003 \$514.50 [Special Order](#)

10 M LONG W/25 CM RUNG SPACING

Type Black Anodized Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends
Weight: 5.73 lbs (2.600 kg)

LD39043 \$732.00 [Special Order](#)

10 M LONG W/30 CM RUNG SPACING

Type Black Anodized Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends
Weight: 3.97 lbs (1.800 kg)

LD39008 \$418.25 [Special Order](#)



FLEXIBLE SIDED LADDERS WIDE RUNG

Flexible sided ladders are a cost effective, lightweight solution for temporary access to confined spaces and difficult to reach locations. Even with minimal training, ladders can easily be transported and rapidly deployed for use. Personnel utilizing ladders should always use a separate fall protection system for safety.

Construction:

The rungs are hollow tubes with a dowel insert. Rungs are secured to the side wire ropes with pins and resin. A pin is driven through the center of the rope into the dowel and set in resin to form a solid block inside the rung. A plastic cap is then pushed in to seal the rung end. Black rungs are cut to size and drilled before treatment to ensure that the alloy tube is 100% anodized.

Compact Ladders

General purpose ladder for ascending/descending. Used for applications such as manhole entry, caving, and access to lighting truss. With fitness and a little practice, they are easy to climb.

Key Features:

- Useful for work positioning
- Wide enough to fit both feet side by side
- Larger diameter rungs are more comfortable to stand on for long periods of time
- Used for applications such as cleaning, inspection, and vessel entry
- Rungs are 10.6" wide
- Aluminum rungs are 1" Diameter
- GRP rungs are 1.3" diameter

1 M LONG W/25 CM RUNG SPACING

Type Wide Black Aluminum Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends
Weight: 1.65 lbs (750 g)

LD39047 \$105.00 [Special Order](#)

1 M LONG W/30 CM RUNG SPACING

Type Wide Aluminum Rung, 4 mm Galvanized Cable, Swaged Eye Ends
Weight: 1.37 lbs (620 g)

LD39046 \$90.00 [Special Order](#)

1 M LONG W/30 CM RUNG SPACING

Type Wide GRP Rung, 4 mm Stainless Steel Cable, Swaged Eye Ends
Weight: 2.34 lbs (1.060 kg)

LD39052 \$98.00 [Special Order](#)

FLEXIBLE SIDED LADDERS Y SPREADER

Used when you need to attach a flexible ladder to a single attachment point.

Weight: 3.97 lbs (1.800 kg)

LD39009 \$31.25 [Special Order](#)

RAPID DEPLOY POUCH COMPACT LADDER

Keeps ladder neatly rolled ready for easy deployment.

Weight: 6.0 oz (163 g)

LD39032 \$113.00 [Special Order](#)

FIBRELIGHT LADDER

Wide enough for a single foot, these polyester webbing ladders feature cloth covered carbon fiber rungs 30cm apart. Suitable for lightweight use only (maximum rated load 120kg). Stainless Steel Delta screw link included.

5M x 30CM

Weight: 2.875 lbs (1,305 g)

Red/Black

LD39053 \$382.00 [Special Order](#)

10M x 30CM

Weight: 5.19 lbs (2.345 kg)

Red/Black

LD39054 \$644.00 [Special Order](#)

10M x 30CM

Weight: 5.19 lbs (2.345 kg)

Black

LD39057 \$663.70 [Special Order](#)

15M x 30CM

Weight: 7.75 lbs (3.524 kg)

Red/Black

LD39055 \$900.00 [Special Order](#)

20M x 30CM

Weight: 10.31 lbs (4.690 kg)

Red/Black

LD39056 \$1175.00 [Special Order](#)

LYON RUNG STANDOFFS

LD39058 \$29.00 [Special Order](#)

Rope

Webbing
and Cordage

Personal
Gear

Hardware

Solutions
and Kits

Patient
Care

Logistics and
Support Gear

Training and
Education



ISC HAULERBINER COMPACT RESCUE SYSTEM



The ISC HaulerBiner Rescue is a compact kit, which can be worn on the harness and used for pick-offs in work at height and rope access rescues. The HaulerBiner can also be used to easily adjust the orientation of a stretcher and can be used for short-haul tensioning. The ISC HaulerBiner device has a theoretical mechanical advantage of either 6:1 or 7:1, depending on the orientation the device is used in. The pulley wheels are mounted in the body of the carabiner, keeping them clear of the anti-tangle mesh outer, preventing it from jamming the wheels. Due to the in-carabiner wheel mounting, the ISC HaulerBiner kit is very compact when fully contracted, giving maximum haul height.

- ARBORIST
- UTILITIES SAFETY
- ROPE ACCESS
- ROPE RESCUE
- CONFINED SPACE
- ROPES COURSE

MBS: 16 kN (3569 lbf) **Weight:** 1.20 lbs (575 g)
WLL: 140 kg (308 lbs)

105 CM

HD26272 \$263.68

165 CM

HD26273 \$283.97

300 CM

HD26297 \$324.53

COMPLIANT: EN 12278, EN 567



PMI®/SMC ADVANCE TECH HAUL SYSTEM MADE IN THE USA

The new PMI Advance Tech HX Haul System provides an extremely strong and versatile haul system. Weighing around 3 pounds, this kit is pre-rigged as either a 4:1 or 5:1 mechanical advantage system. Just flip the kit end to end for either advantage as needed. Also included are two SMC Lite Steel carabiners, a 5mm oval screw link, and a PMI accessory cord lanyard which releases or sets the progress capture cam. This entire kit comes in a compact storage bag and is everything you need to quickly deploy a strong mechanical advantage system.

- ARBORIST
- UTILITIES SAFETY
- ROPES COURSE
- ROPE RESCUE
- CONFINED SPACE
- WILDERNESS RESCUE
- FIRE RESCUE
- ROPE ACCESS


System Features:

- Pre-rigged system provides either a 4:1 or 5:1 mechanical advantage
- Built-in progress capture system
- Features the SMC Advance Tech HX and Tech Mate pulleys
- Both pulleys made from high quality anodized aluminum
- Kit includes 10 meters of 9mm PMI Classic Professional EZ-bend rope
- Pulleys can accommodate rope diameters from 7mm to 12.5mm

Weight: 3.15 lbs (1.430 kg)

KT36158 \$466.00

BERRY COMPLIANT

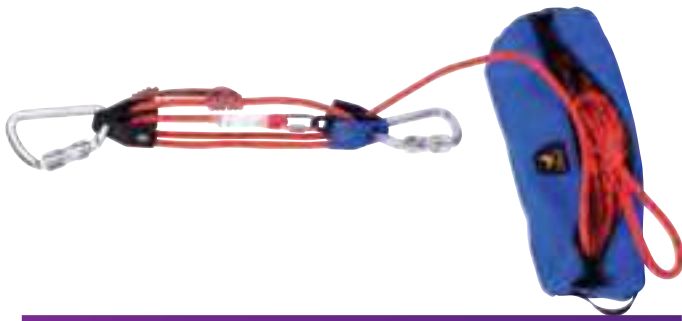

PMI® FP LITE HAUL SYSTEM MADE IN THE USA

If regulatory compliance is a priority, choose this super compact haul system with autolocking ANSI rated connectors features that are designed to meet OSHA regulations. System is completely prerigged and ready for use, offering a 4:1 mechanical advantage in one configuration and a 5:1 mechanical advantage in the other.

TOWER WORK FALL PROTECTION ROPE RESCUE

Key Features:

- 1 SMC JR Pulley and 1 SMC JRB Pulley
- 2 SMC FP Lite Alloy Carabiners
- 10 m, 7 mm Tuff Cord
- 1 m, 5 mm Accessory Cord
- One 5 mm Oval Screw Link
- 1 Storage Bag (Blue)

Weight: 2.875 lbs (1,305 g)

KT36159 \$245.50

BERRY COMPLIANT



PMI® DELUXE HAUL SYSTEM MADE IN THE USA

Compact and strong, this pre-rigged haul system can be rigged as a 4:1 or 5:1; just flip it end to end. The end of the PMI® 9 mm EZ-Bend is attached to the system instead of free floating.

ARBORIST CONFINED SPACE CAVE RESCUE
 ROPE RESCUE ROPE ACCESS

System Features:

- 2 SMC Mini PMP Pulleys
- 2 SMC Lite Steel Carabiners
- 10 m, 9 mm EZ-Bend
- 2 m, 6 mm Accessory Cord
- One 5 mm Oval Screw Link
- 1 Storage Bag (Blue)

Weight: 3.10 lbs (1.400 kg)

KT36077 \$397.00

BERRY COMPLIANT



PMI® JR HAUL SYSTEM MADE IN THE USA

The same haul advantage as the Deluxe system, but in a lighter package. The pre rigged 4:1 or 5:1 haul system come with SMC's new JRB mini pulleys.

ARBORIST CONFINED SPACE OUTDOOR CLIMBING
 ROPE RESCUE ROPE ACCESS RECREATIONAL CAVING

System Features:

- 1 SMC JR Pulley and 1 SMC JRB Pulley
- 2 SMC Aluminum Carabiners
- 10 m, 7 mm Tuff Cord
- 1 m, 5 mm Accessory Cord
- One 5 mm Oval Screw Link
- 1 Storage Bag (Blue)

Weight: 1.85 lbs (840 g)

KT36128 \$207.00

BERRY COMPLIANT



RADIUM RELEASE HITCH KIT MADE IN THE USA

Radium Release Hitches have been proven to out-perform load release straps time after time. The Radium has greater extension (9+ ft) and better control and it can never fuse together under shock load the way that load release straps can. Carabiners are part of the system, simplifying your rigging.

ROPE RESCUE CONFINED SPACE
 UTILITIES SAFETY ROPE ACCESS

Key Features:

- 9 + ft extension
- Can't "fuse" under shock loads
- Integral carabiners
- Pre-tied with 8 mm accessory cord for convenience
- Comes in a convenient storage pouch
- Hook and loop fasteners hold carabiners in place for fast deployment
- Instructions to re-tie hitch

Weight: 1.81 lbs (816 g)

KT36074 \$120.75

BERRY COMPLIANT



HARKEN® POWERSEAT™ - BATTERY POWERED **MADE IN THE USA**

The PowerSeat™ Battery Powered unveils new possibilities in enclosed and confined space rope access & rescue. The PowerSeat™ Battery Powered quietly delivers a powerful 661.4 lb (300 kg) hoist capability with controlled sensitivity to perform the most delicate rescues, or precise maneuvering of materials and components for installation or maintenance. Developed as a requirement in industry, it provides a lightweight, prolonged usage, powered ascender and utility winch. With the ability to operate comfortably and confidently in oxygen and ventilation starved environments it provides a level of operator safety and comfort that directly increases productivity and efficiency. Suitable for blade cleaning, confined space and indoor rope access and rescue applications.

*Must be used with a Fall-Arrest system

Key Features:

- Ergonomically designed to stay in an upright position
- A brake system offers security against a free fall
- Encapsulating jaw cover protects against snagging fingers and clothing in the winch
- Speed control is achieved by a fail-safe switch which controls ascent speed
- PowerSeat™ Battery has a 48V lithium-ion battery with a BMS (Battery Management System) to preserve its useful life. Battery enclosure certified to IP54

Max Rope Size:12.7mm
Working Load Limit: ...kN 300kg
Working Load Limit: lbf 661.4 lbs
Sizing Info: .. 10-12. 7 mm rope
Weight:30.90 lbs (19.000 kg)

Spec1 Battery Life: 550 m
 at 125 kg

Spec2 Max Ascent Speed:45.9 ft/min
(14m/min)

HD26260 \$8372.00 **Special Order**

COMPLIANT: CE 2006/42/CE MACHINERY DIRECTIVE, 2004/108/CE ELECTROMAGNETIC COMPATIBILITY DIRECTIVE



HARKEN® POWERSEAT™ - BATTERY POWERED COMPACT **MADE IN THE USA**

The PowerSeat™ Battery Powered Compact offers the user the versatility of a lightweight portable winch that can be used as a mechanical ascender for work at height, rescue & winching applications. The PowerSeat™ Battery Powered Compact Compact has been developed in response to our customers, particularly in the Rescue and Utility Winching / Lifting markets. The primary advantage the PowerSeat™ Compact offers is the short stem allowing the operator to get closer to the anchorage point.

*Must be used with a Fall-Arrest system

Key Features:

- Ergonomically designed to stay in an upright position
- A brake system offers security against a free fall
- Encapsulating jaw cover protects against snagging fingers and clothing in the winch
- Speed control is achieved by a fail-safe switch which controls ascent speed
- PowerSeat™ Battery has a 48V lithium-ion battery with a BMS (Battery Management System) to preserve its useful life. Battery enclosure certified to IP54

Max Rope Size:12.7mm
Working Load Limit: ...kN 300kg
Working Load Limit: lbf 661.4 lbs
Sizing Info: .. 10-12. 7 mm rope
Weight:30.90 lbs (19.000 kg)

Spec1 Battery Life: 550 m
 at 125 kg

Spec2 Max Ascent Speed:45.9 ft/min
(14m/min)

HD26261 \$7362.00 **Special Order**

COMPLIANT: CE 2006/42/CE MACHINERY DIRECTIVE, 2004/108/CE ELECTROMAGNETIC COMPATIBILITY DIRECTIVE



HARKEN® RIGGERS WINCH 500

The Harken® Riggers Winch provides the user with a lightweight, CE certified, portable winch mounted to a robust adaptor plate. The Harken® Riggers Winch weighs 15.40 lbs (7.000 kg) with a 1/2 ton working load limit, the 2 speed winch magnifies the operator pulling power by up to 40 times. The multiple mounting options provide versatility when working in difficult or remote environments.

- GLOBAL
- UTILITIES SAFETY
- ROPE ACCESS
- ROPE RESCUE
- WILDERNESS RESCUE
- TOWER WORK
- CONFINED SPACE

Key Features:

- Sculpted mounting plate removes excess weight and provides multiple attachment points without compromising strength
- The pigtail line lead ensures correct alignment and loading of the winch for maximum efficiency
- CE certified under EN 13157
- Harken's aluminum 40.2 winch features 17-4 PH stainless steel load carrying gears and pins for strength and durability
- The unique drum design maximizes grip on the rope
- Designed for ropes up to 1/2" diameter
- Max working load of 4.9 kN and a breaking load of 24.5 kN

MBS: 24.5 kN (5508 lbf) **Weight:** 15.4 lbs (7.000 kg)
Working Load Limit: 4.9 kN **Length:** 11.40" (29.0 cm)
 .. (1102 lbf) **Width:** 11.40" (29.0 cm)

HD26263 \$1725.00

COMPLIANT: CE EN 13157

RELEASING THE LOAD

A cordage-based load release hitch provides greater consistency and performance than a webbing-based load release hitch. Load release hitches made of cordage are less susceptible to fusing together under shock load, and provide better control during release. Load release hitches are typically utilized in rope systems to release a fixed device while under load, or to transfer a load from one rope to another. They are useful for increasing adjustability in high directionals, passing knots, releasing a belay after it has caught, or adjusting the position of a direction change after it has been loaded, among other things.

An effective load release mechanism must be able to withstand anticipated forces and still be operable afterward. The Radium Release Hitch incorporates a Munter hitch and an effective 3:1 through carabiners, which is quite forgiving and absorbs force well without locking up the tie-off. This hitch was developed in the late 1990's by Kirk and Katie Mauthner, of Rigging for Rescue. The concept was formed as the result of a comparative analysis of the eleven most popular release devices at that time, and came to surface amid the steaming waters of Radium Hot Springs.



HARKEN® LOKHEAD WINCH 500 KIT

This man-riding portable capstan winch is designed for confined space retrieval or for use with davit systems using an unlimited length of fibrous rope. The captive head allows the winch to be used safely, and keeps the rope from accidentally releasing. The LokHead can be used anywhere a load needs to be lifted and lowered. Rugged to a tripod, it can be used for confined-space rescue, for load moving/hauling, and man-riding. The Harken® LokHead Winch weighs 9.30 lbs (4.200 kg) and offers a 40:1 power ratio with 2 gears. The LokHead winch kit comes with winch, mounting plate, 10" winch handle, control lever, tripod adaptor, anchor strop, connectors and a heavy duty carry case providing you with everything you need for a tripod set up.

- GLOBAL
- UTILITIES SAFETY
- TOWER WORK
- ROPE RESCUE
- ROPE ACCESS


Key Features:

- Encapsulating jaw cover protects fingers and clothing from catching in the winch
- Lightweight, weighing just 9.30 lbs (4.200 kg)
- Can be incorporated into tripod design without significantly increasing the overall weight
- Designed to work with rope 10–12.7mm
- Certified to EN13157:2009 (Machinery Directive harmonized standard) for lifting goods and equipment, as well as EN1496:2007 as a rescue lifting device.

Max Rope Size: 12.7 mm **Weight:** 9.30 lbs (4.200 kg) –
MBS: 24.5 kN (5508 lbf) winch only
Working Load Limit: 4.9 kN
 .. (1102 lbf)

HD26265 \$2822.00

COMPLIANT: CE EN 13157:2009, EN 1496:2007

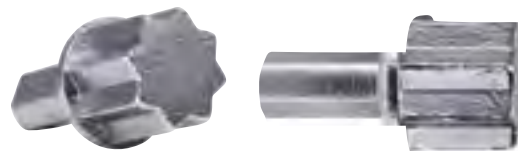

HARKEN® POWER DRILL ADAPTOR

The Harken® Power drill adaptor is designed to work with a 1/2" right angle drill.

Key Features:

- Harken Power Drill Adaptor is included with the Harken Winches

HD26264 \$32.25

COMPLIANT: CE EN 13157:2009, EN 1496:2007



PATIENT CARE

At the core of every rescue is patient care. As a rescuer, you take seriously your responsibility to assist the people who need your help. PMI understands the determination that drives you. That's why we work hand in hand with our friends at Cascade and Skedco to bring you gear that is designed with your safety, and the safety of others, always at the forefront.

CASCADE ADVANCE SERIES MODEL 200 CONFINED SPACE



The new narrow version of the ultimate small team response litter. Designed specifically for use in confined space situations, this litter maintains all the great usable features of the traditional Advance series litters. Crafted from hand laminated composites, it provides excellent subject protection and easy maneuverability for the litter attendants. A great choice for urban, industrial, cave and/or mountain rescues when space is limited.

Key Features:

- Four patient restraint straps for quick, secure subject immobilization
- Abrasion resistant shell
- Steel handrails/construction
- Ample brackets
- Bright orange exterior

ONE PIECE

Weight: 17.50 lbs (7.938 kg)
Weight with PMI@ FAST: 21.50 lbs (9.752 kg)
Height: 5.00" (12.7 cm)
Width: 19.50" (49.5 cm)

TWO PIECE

Weight: 19.00 lbs (8.620 kg)
Weight with PMI@ FAST: 23.00 lbs (10.433 kg)
Length: 82.00" (208.3 cm)

ONE PIECE

Weight: 17.50 lbs (7.938 kg)
Weight with PMI@ FAST: 21.50 lbs (9.752 kg)

TWO PIECE

Weight: 19.00 lbs (8.620 kg)
Weight with PMI@ FAST: 23.00 lbs (10.433 kg)

PE42080 \$950.00

PE42081 \$1225.00

BERRY COMPLIANT

CASCADE ADVANCE SERIES MAX



This is the ultimate small team response litter. With so many choices, there is an Advanced Series Litter to fit any need. To provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. The new Max version provides an extra 2" of width, and will accommodate any 16" standard backboard.

Key Features:

- Patent Pending Articulating Lift Points
- 3/4" Top Rail
- Four, 1" Patient Restrain Straps to securely immobilize the patient to the bed of the litter
- Steel handrails and ample brackets
- Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt
- Outer color: International Orange
- Also available in a 2-Piece Model (PE42085)

Height: 6.25" (15.2 cm)
Width: 25.00" (63.5 cm)

Length: 82.00" (208.3 cm)

ONE PIECE

Weight: 24.00 lbs (10.866 kg)
Weight with PMI@ FAST: 28.00 lbs (12.701 kg)

TWO PIECE

Weight: 26.00 lbs (11.79 kg)
Weight with PMI@ FAST: 30.00 lbs (13.608 kg)

PE42084 \$950.00

PE42085 \$1225.00

BERRY COMPLIANT

CASCADE ADVANCE SERIES TITANIA

MODEL 200



This Advance Series litter is exceptionally strong yet flexible, weighing in at only about 14 lbs. The shell is extremely abrasion resistant because of its hand laminated composites. Its shape, handrails and ample brackets provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. This litter also features tough titanium construction.

Key Features:

- 3/4" Top Rail
- Four, 1" Patient Restraint Straps to securely immobilize the patient to the bed of the litter
- Titanium handrails and ample brackets
- Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt
- Outer color: International Orange
- Also available in a 2-Piece Model (PE42200)

Height: 5.50" (14.0 cm) **Length:** 82.00" (208.3 cm)
Width: 21.50" (54.6 cm)

ONE PIECE

Weight: 13.50 lbs (6.123 kg)

PE42199 \$1700.00

TWO PIECE

Weight: 15.50 lbs (7.030 kg)

PE42200 \$1850.00

BERRY COMPLIANT



CASCADE ADVANCE SERIES 200

TITANIA MAX



This Advance Series litter is exceptionally strong yet flexible, weighing in at only about 20 lbs. The shell is extremely abrasion resistant because of its hand laminated composites. Its shape, handrails and ample brackets provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. This litter also features tough titanium construction. Includes the trademarked Cascade Rescue FastLock system for rapid, 10 second takedown/reassembly.

Key Features:

- All Cascade Advance litters come with removable pad and aluminum FastPax Rails
- Patent Pending Articulating Lift Points
- 3/4" Top Rail
- Four, 1" Patient Restraint Straps to securely immobilize the patient to the bed of the litter
- Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt
- Outer color: International Orange
- Titanium handrails and ample brackets

Height: 6.25" (16.0 cm) **Length:** 82.00" (208.3 cm)
Width: 25.00" (63.5 cm)

TWO PIECE

Weight: 19.50 lbs (8.845 kg)

PE42126 \$2020.00 w/FastPax Rails

BERRY COMPLIANT



Rope

 Webbing
and Cordage

 Personal
Gear

Hardware

 Solutions
and Kits

**Patient
Care**

 Logistics and
Support Gear

 Training and
Education

CASCADE ADVANCE SERIES MAX



This is the ultimate small team response litter. With so many choices, there is an Advance Series Litter to fit any need. Crafted of hand laminated composites, its shape, handrails and ample brackets provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. This MAX version will accommodate any 16" wide backboard.

Key Features:

- Includes litter pad and FastPax rails
- Patent Pending Articulating Lift Points
- 3/4" Top Rail
- Four, 1" Patient Restrain Straps to securely immobilize the patient to the bed of the litter
- Steel handrails and ample brackets
- Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt
- Outer color: International Orange
- Also available in a 2-Piece Model (PE42125)

Height:6.25" (15.2 cm) **Length:** 82.00" (208.3 cm)
Width:25.00" (63.5 cm)

ONE PIECE

Weight: 24.00 lbs (10.866 kg)
Weight with PMI® FAST: 25.00 lbs (11.340 kg)

PE42124 \$1120.00 w/o PMI® FAST
 PE42115 \$1247.00 w/ PMI® FAST

TWO PIECE

Weight: 26.00 lbs (11.79 kg)
Weight with PMI® FAST: 27.00 lbs (12.247 kg)

PE42125 \$1395.00 w/o PMI® FAST
 PE42096 \$1522.00 w/ PMI® FAST

BERRY COMPLIANT



CASCADE ADVANCE SERIES MODEL 200 CONFINED SPACE



The new narrow version of the ultimate small team response litter. Designed specifically for use in confined space situations, this litter maintains all the great usable features of the traditional Advance series litters. Crafted from hand laminated composites, it provides excellent subject protection and easy maneuverability for the litter attendants. A great choice for urban, industrial, cave and/or mountain rescues when space is limited.



Key Features:

- Four patient restraint straps for quick, secure subject immobilization
- Abrasion resistant shell
- Steel handrails/construction
- Ample bracket
- Bright orange exterior
- Made in the USA

Height:5.00" (12.7 cm) **Length:** 82.00" (208.3 cm)
Width:19.50" (49.5 cm)

ONE PIECE

Weight: 17.50 lbs (7.938 kg)
Weight with PMI® FAST: 18.50 lbs (8.391 kg)

PE42121 \$1120.00 w/o PMI® FAST
 PE42187 \$1247.00 w/ PMI® FAST

TWO PIECE

Weight: 19.00 lbs (8.620 kg)
Weight with PMI® FAST: 20.00 lbs (9.072 kg)

PE42198 \$1225.00 w/o PMI® FAST
 PE42184 \$1395.00
 PE42188 \$1522.00 w/ PMI® FAST

BERRY COMPLIANT

CASCADE ADVANCE SERIES CARBON TITANIUM 2 P LITTER



Choose this light-weight, high performance basket-style stretcher for the ultimate in response capability. The Triaxial Weave Carbon Fiber and Kevlar shell provide abrasion resistant patient protection, and the Titanium top-rail is easy to handle. At a weight of just 14 pounds, the two-piece construction can be split between rescuers to be carried in to the field.

Key Features

- Exceptionally Light-Weight
- Four Patented Articulating Lift Points
- Tested to Mil Spec and ASTM F2821-10
- Compatible with Guardian Litter Shield, litter wheel, and handles

PE42196 \$2700.00

CASCADE PROFESSIONAL SERIES TITANIA MODEL 200



MADE IN THE USA

Technically advanced and nearly indestructible, the Cascade Professional Litter is built with a stainless steel or steel body and cross members for the most extreme rescue conditions. This reasonably priced litter features a patient contour support which is molded and padded for patient comfort.

- ROPE RESCUE**
- WILDERNESS RESCUE**
- CAVE RESCUE**
- CONFINED SPACE**
- INDUSTRIAL RESCUE**

Key Features:

- Stainless Steel Litter has 4 Articulating Lift Points
- 3/4" frame and supporting cross members and 3/8" secondary railing
- Powder coated
- Integral backboard
- UV resistant polyethylene mesh liner
- Tapered or rectangular shape
- One or two piece
- Two piece version uses the FastLock System
- Available with PMI® FAST installed

Height:6.25" (16.0 cm) **Length:** 83.00" (211.0 cm)
Width:25.50" (64.8 cm) **Material:** Steel

STEEL ONE PIECE

Weight:31.00 lbs (14.061 kg)

Tapered	Rectangular
PE42040 \$535.00	PE42143 \$535.00

BERRY COMPLIANT

STAINLESS ONE PIECE

Weight:31.00 lbs (14.061 kg) **Weight with PMI® FAST:** 35.00 lbs (15.876 kg)

Tapered	Tapered	Rectangular
PE42041 \$925.00	PE42116 \$1222.00	PE42151 \$1222.00
w/o PMI® FAST	w/ PMI® FAST	w/ PMI® FAST

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017)

STAINLESS TWO PIECE

Weight:32.00 lbs (14.515 kg) **Weight with PMI® FAST:** 36.00 lbs (16.329 kg)

Tapered	Tapered	Rectangular
PE42042 \$1300.00	PE42097 \$1597.00	PE42152 \$1597.00
w/o PMI® FAST	w/ PMI® FAST	w/ PMI® FAST

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2017)

CASCADE ADVANCE SERIES MODEL 200 CONFINED SPACE



MADE IN THE USA

The new titanium narrow version of the ultimate small team response litter. Designed specifically for use in confined space situations, this litter maintains all the great usable features of the traditional Titania Advance series litters. Crafted from hand laminated composites, it provides excellent subject protection and easy maneuverability for the litter attendants. A great light weight choice for urban, industrial, cave and/or mountain rescues when space is limited.

- ROPE RESCUE**
- WILDERNESS RESCUE**
- CAVE RESCUE**
- CONFINED SPACE**

Key Features:

- All Cascade Advance litters come with removable pad and aluminum FastPax Rails
- Four patient restraint straps for quick, secure subject immobilization
- Abrasion resistant shell
- Titanium handrails/construction
- Ample brackets
- Bright orange exterior
- Made in the USA

Height:5.00" (12.7 cm) **Length:** 82.00" (208.3 cm)
Width:19.50" (49.5 cm)

ONE PIECE

Weight: 13.50 lbs (6.123 kg)
Weight with PMI® FAST: 14.50 lbs (6.577 kg)

PE42185 \$1870.00 w/o PMI® FAST
 PE42189 \$1997.00 w/ PMI® FAST

TWO PIECE

Weight: 15.50 lbs (7.031 kg)
Weight with PMI® FAST: 16.50 lbs (7.484 kg)

PE42186 \$2020.00 w/o PMI® FAST
 PE42190 \$2317.00 w/ PMI® FAST

BERRY COMPLIANT



Steel

Stainless



CASCADE PROFESSIONAL SERIES TITANIUM



MADE IN THE USA

When the best possible combinations of high strength and light weight are your priority, choose a Cascade Titanium Litter. The most advanced features of any rescue litter available today. Saving 13 lbs over the stainless steel model, this litter is designed for the demanding professional.

INDUSTRIAL RESCUE

Key Features:

- Titanium frame
- 4 Articulating Lift Points
- 3/4" frame and supporting cross members and 3/8" secondary railing
- Tapered or rectangular shape
- One or two piece, two piece version uses the FastLock System
- Available with PMI® FAST installed
- Integral backboard
- UV resistant polyethylene mesh liner

Height: 6.25" (16.0 cm) **Length:** 83.00" (211.0 cm)
Width: 25.50" (64.8 cm)

ONE PIECE

Weight: 13.75 lbs (6.237 kg) **Weight with PMI® FAST:** 17.75 lbs (8.051 kg)

Tapered PE42099 \$2350.00 w/o PMI® FAST	Tapered PE42118 \$2647.00 w/ PMI® FAST	Rectangular PE42149 \$2647.00 w/ PMI® FAST
---	--	--

TWO PIECE

Weight: 14.90 lbs (6.759 kg) **Weight with PMI® FAST:** 18.90 lbs (8.573 kg)

Tapered PE42095 \$2950.00 w/o PMI® FAST	Tapered PE42117 \$3247.00 w/ PMI® FAST	Rectangular PE42150 \$3247.00 w/ PMI® FAST
---	--	--

BERRY COMPLIANT

COMPLIANT: NFPA 1983 (2012)



CASCADE ABRASION GUARD

If your working environment demands extended periods of dragging or sliding over rocks, snow, ice and other rough terrain, Abrasion Guard helps reduce drag and protects the bottom of your Advance Series Litter.

Key Features:

- Superior protection

Weight: 3.00 lbs (1.360 kg)

Model 200
PE42090 \$92.00 **Special order**



CASCADE ADVANCE SERIES MODEL 200

MADE IN THE USA



This is the ultimate small team response litter. With so many choices, there is an Advanced Series Litter to fit any need. To provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. The new Max version provides an extra 2" of width, and will accommodate any 16" standard backboard.

ROPE RESCUE **WILDERNESS RESCUE** **CAVE RESCUE**

CONFINED SPACE

Key Features:

- Includes litter pad and FastPax rails
- 5/8" Top Rail
- Four, 1" Patient Restrain Straps to securely immobilize the patient to the bed of the litter
- Steel handrails and ample brackets
- Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt
- Outer color: International Orange
- Also available in a 2-Piece Model (PE42081)

Height: 5.50" (14.0 cm) **Length:** 82.00" (208.3 cm)
Width: 21.50" (54.6 cm)

ONE PIECE

Weight: 17.50 lbs (7.938 kg)
Weight with PMI® FAST: 18.50 lbs (8.391 kg)

TWO PIECE

Weight: 19.00 lbs (8.620 kg)
Weight with PMI® FAST: 20.00 lbs (9.072 kg)

PE42121 \$1120.00 w/o PMI® FAST	PE42122 \$1395.00 w/o PMI® FAST
PE42128 \$1247.00 w/ PMI® FAST	PE42120 \$1522.00 w/ PMI® FAST

BERRY COMPLIANT



ONE PIECE LITTER STORAGE BAG

Designed to protect your litter from sun, rain, and snow; even while stored on top of your rescue vehicle. Designed with extra room for other rescue gear to be stored inside the bag.

Key Features:

- Made from 18 oz vinyl
- Weatherproof closure
- Wide webbing carrying handles

Weight: 2.50 lbs (1.130 kg)

PE42164 \$210.00



CASCADE TWO PIECE LITTER BACKPACK



Designed to protect your litter from sun, rain, and snow; even while stored on top of your rescue vehicle. Designed with extra room for other rescue gear to be stored inside the bag.

Key Features:

- Made from Cordura®
- Weatherproof closure
- Padded adjustable shoulder straps
- Compression straps for load stabilization

Weight: 6.50 lbs (2.950 kg)

PE42165 \$155.00



CASCADE LITTER FLOTATION SYSTEM



Designed to fit all Cascade Professional Series Litters and Advance Series Litters. Made to keep patient's head above water. Easily attached and removed for storage, this Flotation System is ideal for ocean, lake and swiftwater rescue.

Key Features:

- Capable of floating the litter, patient, and at least one rescuer
- Will also fit most other manufacturers' tube frame litters

Weight: 11.00 lbs (5.000 kg)

PE42140 \$410.00



PMI® TARANTULA



Adjustable 4 leg webbing litter spider sewn onto a forged O-ring. Litter and carabiners in photo not included.



Key Features:

- Legs are independently adjustable
- Comes with 4 meter long attendant line & storage bag
- Sewn from heavy duty webbing

Weight: 4.63 lbs (2.100 kg)

PE42020 \$198.00



PMI® CLASSIC SPYDER



Adjustable 4 leg litter spider made from 10 mm PMI® Classic static rope and 6 mm prusik cord tied on a forged O-ring. Litter and carabiners in photo not included.



Key Features:

- Legs are independently adjustable
- Comes with 4 meter long attendant line & storage bag
- User can add the PMI®/SMC Deluxe or JR Haul System to convert this to a litter scoop system

Weight: 30.00 lbs (1.400 kg)

PE42021 \$98.00



Brake Closeup



Handles Nested

CASCADE RESCUE EQUALIZER ADJUSTABLE HANDLE SYSTEM



Finally! A litter handle system that actually works. The Equalizer represents years of R&D by Cascade Rescue Company. The Equalizer easily and quickly attaches to all Cascade Professional and Advance Series litters. It will even fit other popular brand name litters. The Equalizer is available in both Titanium and Stainless Steel models and features a unique 24 position system allowing the operators to quickly change handle positions based upon operator height or varying terrain conditions. No longer is your downhill team mate reaching into the air to level the litter on steep descents, while the uphill operator is stooping down low. For transport to the scene, or for high or low incline work, the handles of the Equalizer may be positioned so they "nest" against the side of the litter, or removed entirely and stowed in a pack. The Equalizer is so light you'll hardly know it's there.



Key Features:

- 24 different handle positions
- Available in Titanium or Stainless Steel
- Rapid attachment system
- Handles store flush to litter sides
- Compatible with Advance Series brake levers
- Fits all Cascade litters

Weight: 7.350 lbs (3.334 kg)
 14.60 lbs (6.622 kg)

PROFESSIONAL SERIES

Titanium	Stainless Steel
PE42202 \$845.00	PE42203 \$635.00

ADVANCE SERIES

Titanium	Stainless Steel
PE42204 \$840.00	PE42205 \$480.00

ADVANCE MAX

Titanium	Stainless Steel
PE42206 \$840.00	PE42207 \$480.00

CMC STYLE

Titanium	Stainless Steel
PE42208 \$857.00	PE42209 \$665.00



CASCADE TERRA TAMER



The Terra Tamer is an exceptionally light, obstacle crushing all-terrain wheel that fits on any litter using a rapid attachment system. The Terra Tamer uses a durable titanium frame and stainless components. Complete control is made possible by an adjustable brake lever and disc brake system.

Key Features:

- Lightweight
- 26 4.75" all-terrain wheel
- Two piece packable design
- Disc brake
- Titanium Frame

Weight: 15.40 lbs (6.985 kg)

PE42201 \$1525.00

CASCADE ADVANCE SERIES



This Advance Series litter is exceptionally strong yet flexible, weighing in at only about 20 lbs. The shell is extremely abrasion resistant because of its hand laminated composites. Its shape, handrails and ample brackets provide maximum victim protection and comfort as well as optimum maneuverability for the litter attendant. This litter also features tough titanium construction. Includes the trademarked Cascade Rescue FastLock system for rapid, 10 second takedown/reassembly.

Key Features:

- All Cascade Advance litters come with removable pad and aluminum FastPax Rails
- Patent Pending Articulating Lift Points
- Four, 1" Patient Restrain Straps to securely immobilize the patient to the bed of the litter
- 3/4" Top Rail
- Titanium handrails and ample brackets • Excellent vertical raise handling characteristics
- At home on snow, rock, ice or asphalt • Outer color: International Orange

Height:6.25" (16.0 cm)
Width:25.00" (63.5 cm)

Length: 82.00" (208.3 cm)
Weight: 20.50 lbs (9.299 kg)

PE42119 \$2147.00 w/ PMI® FAST

BERRY COMPLIANT



CASCADE TRAIL TECH MADE IN THE USA

All the features, without the weight! Attaching to any litter, the straps loop around and the hooks connect back to the saddle. Once your patient is loaded, the wheel assembly virtually locks on in less than two seconds and won't come off unless you unlock it.



Key Features:

- Aircraft aluminum
- Sealed disk brake
- Sealed bearings
- Ratchet levers for a sure fit
- Trail Tech wheel is interchangeable with Terrain Master wheel

Weight: 20.00 lbs (9.070 kg)

WHEEL W/ 3/4" MOUNT

PE42087 \$1100.00

WHEEL W/ 5/8" MOUNT

PE42133 \$1100.00

CASCADE TERRAIN

MASTER MADE IN THE USA

The Terrain Master wheel delivers a smooth ride in the toughest terrain. Ideal for rough, muddy, sandy, or snow covered trails. Interchangeable with Cascade wheel saddle assembly.

Key Features:

- Aircraft aluminum
- Aluminum wheel rim
- New improved lightweight sealed hub
- Two piece construction for easy packing
- Saddle fits almost any rigid litter
- Wheel with tire quickly mounts to the saddle without tools
- Terrain Master wheel is interchangeable with Trail Tech wheel

Weight: 30.00 lbs (13.608 kg)

WHEEL W/ASSEMBLY

PE42138 \$900.00



SKED® COMPLETE RESCUE SYSTEM

The Complete Rescue System combines the Sked® Basic Rescue System (SK200), the Oregon Spine Splint II (SK300) and the Sked® Foam Flotation System (SK600) in a single money saving package. The entire system combines to make a single back-packable unit. With this system you'll be ready for any emergency rescue situation - on land, in the water, or in the air.

- ROPE RESCUE
- WILDERNESS RESCUE
- CAVE RESCUE
- CONFINED SPACE

Weight: 50.00 lbs (22.680 kg)

Orange ●
SK8000R \$1340.10



SKED® STRETCHER

The stretcher is fabricated from a special plastic formula which is both flexible and durable. Securing straps with steel buckles are sewn into the stretcher through brass grommets which contribute to the strength and durability.

Weight: 13.19 lbs (5.897 kg)

Orange ●
SK2010R \$500.73



SKED® BASIC RESCUE SYSTEM

A complete solution for confined space, high angle, technical rescue, and traditional land based applications. The durable plastic litter provides protection for the patient while allowing extrication through the most demanding confined spaces. The stretcher is rolled for storage in a tough Cordura® backpack (included). Sked® Stretcher becomes semi-rigid when wrapped around the patient.

- GLOBAL
- CONFINED SPACE
- WILDERNESS RESCUE
- ROPE RESCUE
- CAVE RESCUE

Key Features:

- System includes: Sked® Stretcher, Cordura® backpack/towing harness, horizontal lift slings, 30 ft PMI vertical lift line, Steel Locking D Carabiner, 6 ft tow strap
- 4 built in handles

Width:36.00" (91.4 cm) **Weight:** 17.00 lbs (7.710 kg)
Length: 96.00" (243.8 cm) **Bag Dimensions:** 8"x8"x37"

Orange ●
SK2002 \$665.13

SKED® BASIC RESCUE SYSTEM WITH COBRA BUCKLES

The original and still the best solution for confined space, high angle, and land based rescues. Provides outstanding patient protection and security. Includes the Austrian-made Skedco/Cobra side release buckles. Comes equipped for horizontal hoisting by helicopter or for vertical hoisting in caves or industrial confined spaces.

- ROPE RESCUE
- CAVE RESCUE
- WILDERNESS RESCUE
- CONFINED SPACE

Key Features:

- Skedco/Cobra buckles rated at 3,000 lbs
- Durable plastic provides patient protection
- Stretcher rolls up for storage in a tough Cordura® backpack
- Also includes: Horizontal Lift Slings, Tow Strap, Removable Webbing Handles, Steel Locking D Carabiner, and a Vertical Lift Sling

Width:36.00" (91.4 cm) **Weight:** 19.00 lbs (8.620 kg)
Length: 96.00" (243.8 cm) **Bag Dimensions:** 8"x8"x37"

Orange ●
SK200COR \$821.13

COMPLIANT: CE



SKED® FOAM FLOTATION PACKAGE

This self-righting flotation system maintains the Sked® in a nearly vertical position even in rough water. Two rigid foam side floats and an inflatable chest bladder provide buoyancy sufficient to support two rescuers in addition to the patient.

GLOBAL

Key Features:

- 15 lb foot ballast bag
- Available in Orange or Military Green
- Two rigid foam floats
- Inflatable chest bladder

Weight: 17.00 lbs (7.710 kg)

Orange ●
SK600OR \$415.81 **Special Order**

COMPLIANT: CE



INFLATABLE CHEST PAD

The chest pad attaches to the front of the packaged patient, not allowing the patient to float in a face down position. This chest pad inflates with 1 to 2 breaths of air and provides 14 pounds of buoyancy.

Weight: 22.00 lbs (9.979 kg)

SK602 \$115.84



ETHAFOAM FLOAT LOGS (PAIR)

6" rigid ethafoam floats which mount on each side of the Sked® Stretcher and provide the ideal amount of buoyancy.

Weight: 3.13 lbs (1.406 kg)

SK603 \$166.55



SKED® COBRA BUCKLE CONVERSION KIT

A quick connect/quick release buckle for the Sked®. These Austrian-made buckles are rated at 3000 lbs. Durable and easy to use, yet when under tension accidental release is not an issue. In addition, patient packaging is fast because you do not need to weave the webbing through buckles. This retrofit kit fits the Sked® you already have.

Key Features:

- Faster Patient Packaging
- Austrian-made
- Durable and Easy to Use

MBS: Buckle - 13.3 kN (3000 lbf)

Black ●
SK208C \$210.91



SKED® RAPID DEPLOYMENT CONVERSION KIT

Skedco also offers a Rapid Deployment Conversion Kit which includes everything for rapid deployment except the stretcher, for those who already possess the Sked® Basic Rescue System.

Weight: 16.00 lbs (7.257 kg)

Orange ●
SK651OR \$724.02

HMH SKED®



Key Features:

- No grommets to trap contaminants
- Stores flat in stacks of up to 200
- Ideal for use in mass casualty incidents
- Polypropylene straps are chemical resistant
- 2" Side release buckles
- Not for lifting patients

HMH SKED®

W/STRAP KIT

The HMH Sked® is designed for use in mass casualty incidents or Haz-Mat incidents. Patients can be rolled or dragged onto the HMH Sked® rather than lifted. This creates less rescuer fatigue and requires fewer rescuers to be exposed in the Hot Zone at a Haz-Mat incident. The HMH Sked® can be easily dragged by personnel wearing level A protection or even pulled by a rope connected outside the Hot Zone.

Weight: 13.00 lbs (5.900 kg)

SK250 \$353.39

COMPLIANT: CE

HMH SKED®, BODY ONLY

HMD Sked body only without straps. Purchase as a replacement item. The HMH Sked® is designed for use in mass casualty incidents or Haz-Mat incidents. Patients can be rolled or dragged onto the HMH Sked® rather than lifted. This creates less rescuer fatigue and requires fewer rescuers to be exposed in the Hot Zone at a Haz-Mat incident. The HMH Sked® can be easily dragged by personnel wearing level A protection or even pulled by a rope connected outside the Hot Zone.

Weight: 11.00 lbs (4.990 kg)

SK251 \$288.39

RAPID DEPLOYMENT CASE

This is a 14" diameter by 36" width case. Hold up to 4 HMH Sked Rescue System.

Weight: 4.00 lbs (1.820 kg)

SK253 \$118.19



HALF SKED®

PATIENT DRAG MADE IN THE USA



Made from the same durable Sked® material, but only as half as long as the original Sked®. It allows patients to bend at the hips, providing greater flexibility in the most demanding and tight spaces. Not to be used as a hoisting or immobilization device.

- GLOBAL
- CONFINED SPACE
- WILDERNESS RESCUE
- ROPE RESCUE
- CAVE RESCUE
- INDUSTRIAL RESCUE

Key Features:

- Perfect for tight spaces
- Allows greater flexibility
- 2" wide chest and leg straps with easy release buckles

Weight: 8.00 lbs (3.700 kg)

Orange SK220 \$244.25

COMPLIANT: CE



SKEDCO LITTER ACCESSORIES

SKEDCO LIFT SLINGS

(PAIR) MADE IN THE USA

A pair of 9,000 lb. tensile strength slings are provide for hoisting the Sked® stretcher with a helicopter or other haul system in a horizontal position.

- INDUSTRIAL RESCUE

Weight: 14.0 oz (409 g)

SK203 \$44.18

SKEDCO TOW STRAP

This 6 foot strap with bronze snap hooks on each end attaches the Sked® stretcher to the backpack, creating a useful towing harness which can be used in several configurations for towing the Sked® by one or more people.

Weight: 8.0 oz (227 g)

SK204 \$24.06

SKEDCO RETAINER STRAP

This strap will prevent the Sked® Stretcher from unrolling after you roll it up! This strap also come with the SK6000R and SK600GR so you can tie the Ethafoam Floats Log around the SK2001 to keep the flotation system together with the Sked® Basic Rescue System.

Weight:2.0 oz (68 g)

SK209 \$4.74



LSP MILLER HALF BACK MADE IN THE USA

Rescuers have found the LSP Half Back Splint Harness an effective tool for vertical extrication from confined spaces. The Halfback provides spinal immobilization complete with head support.

ROPE RESCUE WILDERNESS RESCUE CAVE RESCUE

CONFINED SPACE

Key Features:

- Leg straps for lower body support
- Head harness
- Six handles allow easy maneuvering
- Compatible with the LSP Miller Full Body Splint

LSP MILLER HALF BACK CARRY BAG

Weight: 12.20 lbs (5.530 kg) **Weight:** 1.19 lbs (544 g)

PE42069 \$1076.25 PE42070 \$133.59



LSP MILLER FULL BODY SPLINT MADE IN THE USA

The Miller Board is a versatile spinal immobilization board and litter that comes complete with a full head and body harness. The harness system allows the patient to be rotated for airway management or to facilitate a difficult rescue without jeopardizing spinal alignment. The Miller board is constructed of high visibility yellow resin and has an x-ray translucent foam core. The Miller Board can be used to extricate the patient, and then tie the board into a litter for the evacuation.

INDUSTRIAL RESCUE

Key Features:

- Chest straps
- Head harness
- Unique shoulder strap design
- Hook and loop straps allow rapid immobilization of a patient

SPLINT CARRY BAG

Weight: 3.75" (9.5 cm) **Weight:** 1.90 lbs (862 g)

Width: 14.00" (35.6 cm)

Length: 65.50" (166.4 cm)

Weight: 15.00 lbs (6.810 kg)

PE42067 \$849.73

PE42068 \$200.90

PMI® HASTY X EVACUATION SEAT

The PMI® Hasty X Evacuation Seat™ is intended for use as an evacuation and extrication device. It is a full two pounds lighter than the previous version of the PMI® Hasty Harness. This evacuation seat is designed for use as a quick, efficient and easy to use device for evacuation when other harnesses are not available and a rapid evacuation time is essential. It is also used as an extrication seat for attaching to a subject when a separate extrication system is needed that can easily go over bulky clothing or equipment. The strategic cutout of material for the lower area has dual straps versus a single strap between the legs that provides a comfortable and secure fit for most body sizes. Make sure to have the PMI® Hasty X Evacuation Seat™ for any hasty evacuation or extrication rescue situation!

INDUSTRIAL RESCUE

Weight: 1.53 lbs (693 g) **Sizing Info:** 48" (large option)
One Harness Size with 2 Sizing Options 42" (small option)

SG51287 \$79.00

VERTICAL LIFT STRAPS

The LSP Vertical Lift Strap Assembly provides for two- or three-point vertical lifting and is designed to be used in conjunction with the LSP Half Back and the Miller Full Body Splint/Litter. It meets all ANSI and military standards for vertical lifting with a 6,000 pound load capacity

Weight: 1.94 lbs (888 g)

PE42071 \$237.08



LSP XTRA BACKBOARD MADE IN THE USA

This patented backboard has been designed to provide 100% x-ray translucence while maintaining the necessary rigidity to protect the patient from further injury during transport. A fully sealed one-piece construction makes it fluid resistant while the HDPE surface allows for easy cleaning and disinfecting. Fits into any standard ambulance compartment. Easy to carry with 18 large hand holds. The XTRA also has high buoyancy for use in water rescues.

- ROPE RESCUE
- WILDERNESS RESCUE
- CAVE RESCUE
- CONFINED SPACE

Key Features:

- Made from high-density polymer
- Floats up to a 200 lb. person
- Maximum weight capacity 500 lbs.
- Works with all head immobilizers and strapping systems
- Very lightweight at 15.25 lbs

Width:15.75" (40.0 cm) **Weight:** 15.25 lbs (6.917 kg)
Length: 71.00" (180.3 cm) **Material:** ..High-density polymer

PE42193 \$150.00 **Special Order**



PMI® ANEXK9 HARNESS MADE IN THE USA

Vertical lift harness designed to securely raise or lower your working dog out of a helicopter or into a disaster site, without the need for a bulky spreader bar. May also be used to extricate an injured animal; removable pack straps allow animal to be carried by a single person after extraction.

- ROPE RESCUE
- WILDERNESS RESCUE
- CAVE RESCUE
- CONFINED SPACE

Key Features:

- Nylon Construction
- Holds Animal Securely
- No Spreader Required
- Adjustable 4-point strap system
- Removable Pack Straps

SMALL

Weight:3.15 lbs
 (1.429 kg)

SG51291 \$150.00

MEDIUM

Weight:3.29 lbs
 (1.491 kg)

SG51292 \$150.00

LARGE

Weight:3.45 lbs
 (1.565 kg)

SG51293 \$150.00

OREGON SPINE SPLINT MADE IN THE USA

Oregon Spine Splint helps to safely remove patients from injury sites without doing further damage to the spine.

- GLOBAL
- CONFINED SPACE
- WILDERNESS RESCUE
- ROPE RESCUE
- CAVE RESCUE
- INDUSTRIAL RESCUE

Key Features:

- Can be re-configured to retract and immobilize the shoulders
- Easy access to the patient's chest and abdomen
- Use in place of a conventional short backboard
- Doubles as a hip or leg splint
- Collar strap
- Forehead restraint (with ten disposable covers)
- Head padding
- Carrying case
- Includes a Shoulder Board (not shown) to help prevent shoulder compression when using a Sked® litter

Weight: 10.10 lbs (4.600 kg)

Orange ●
 SK300 \$249.19

COMPLIANT: CE





LOGISTICS AND SUPPORT GEAR

PMI offers many products to help you store and protect your equipment and gear. Check out this section for the equipment you need to get the job done right.



PMI® MESH PANEL THROW BAG

Lightweight nylon throw bag for creating your own Water Rescue Throw Bag with your PMI rope of choice.

Key Features:

- Light Weight Nylon Bag
- Pre-Tied loop Terminations
- Bag Includes a Floatation Disc
- Durable Mesh for expelling water
- Bright Reflective Band around the center for visibility
- Has an Elastic Loop on the side that for cyalume stick
- Durable Webbing Hand Strap for better control

Orange ●
RB44033 \$19.99



GEAR BUCKET MADE IN THE USA

The PMI® Gear Bucket can hold all of your gear and literally stand up to the test. Plastic reinforced stays keep the bucket upright while stacking your rope inside. Semi-rigid sides make it great for feeding line throwing devices right from the bag with minimal drag on the line.



Key Features:

- Store gloves, pulleys, cord, even snacks in the outside mesh pockets with Velcro closures
- Holds up to 70 m (230 ft) of 11 mm; 46 m (150 ft) of 12.5 mm; or 30 m (100 ft) of 16 mm rope

Weight:..... 1.45 lbs (658 g) **Length:**..... 14.00" (35.6 cm)
Width:..... 11.00" (27.9 cm)

Red ●
RB44049 \$57.00

PMI® ROPE BAG

(PERSONAL) MADE IN THE USA

PMI's exclusive combination of features includes double sewn seams that reinforce the stress points when stuffing your favorite PMI rope. Four sizes to keep gear clean and organized.



Key Features:

- Double sewn seams
- 1000 denier heavy coated Cordura®
- Drawstring closure
- 1" tubular handles with rope insert
- Pocket for rope history card
- Internal clip-in loop at bottom of bag
- Holds up to 12 m of 10 mm rope

Weight:.....2.6 oz (75 g) **Length:**..... 12.00" (30.5 cm)
Width:.....8.50" (21.6 cm)

Black ● Orange ●
RB44025U \$22.00 RB44030U \$22.00



PMI® ROPE PACK MADE IN THE USA

INDUSTRIAL RESCUE

STANDARD

Weight:..... 1.02 lbs (463 g) **Length:**.....21.50" (54.6 cm)
Width:.....10.50" (26.7 cm)

Orange ● Red ● Blue ● Black ●
 RB44040U \$57.00 RB44041U \$57.00 RB44042U \$57.00 RB44043U \$57.00

LARGE

Weight:..... 1.19 lbs (541 g) **Length:**.....25.00" (63.5 cm)
Width:.....10.50" (26.7 cm)

Black ● Blue ● Red ● Orange ●
 RB44019U \$58.50 RB44020U \$58.50 RB44021U \$58.50 RB44028U \$58.50

X-LARGE

Weight:..... 1.22 lbs (553 g) **Length:**.....23.00" (58.4 cm)
Width:.....16.00" (40.6 cm)

Black ● Blue ● Red ● Orange ●
 RB44022U \$66.00 RB44023U \$66.00 RB44024U \$66.00 RB44029U \$66.00

XX-LARGE

Weight:..... 1.25 lbs (567 g) **Length:**.....28.50" (72.4 cm)
Width:.....17.00" (43.2 cm)

Orange ● Red ● Blue ● Black ●
 RB44055U \$68.00 RB44056U \$68.00 RB44057U \$68.00 RB44058U \$68.00

PMI® ROPE PACK

When you need a little extra help with the load, the PMI® Rope Pack will help make the haul easier. Padded backpack straps make carrying a loaded bag more manageable.

INDUSTRIAL RESCUE

Key Features:

- Double sewn seams
- 1000 denier heavy coated Cordura®
- Drawstring closure
- 1" tubular handles with rope insert
- 5/8" grommet on the side of the bag (except personal size)
- Pocket for rope history card
- Internal clip-in loop at bottom of bag
- Holds up to 120 m of 10 mm; 100 m of 11 mm; 75 m of 12.5 mm; 61 m of 16 mm rope

STANDARD

Weight:..... 1.02 lbs (463 g) **Length:**.....21.50" (54.6 cm)
Width:.....10.50" (26.7 cm)

Orange ● Red ● Blue ● Black ●
 RB44040 \$49.75 RB44041 \$49.75 RB44042 \$49.75 RB44043 \$49.75

LARGE

Weight:..... 1.19 lbs (541 g) **Length:**.....25.00" (63.5 cm)
Width:.....10.50" (26.7 cm)

Black ● Blue ● Red ● Orange ●
 RB44019 \$51.00 RB44020 \$51.00 RB44021 \$51.00 RB44028 \$51.00

X-LARGE

Weight:..... 1.22 lbs (553 g) **Length:**.....23.00" (58.4 cm)
Width:.....16.00" (40.6 cm)

Black ● Blue ● Red ● Orange ●
 RB44022 \$55.00 RB44023 \$55.00 RB44024 \$55.00 RB44029 \$55.00

XX-LARGE

Weight:..... 1.25 lbs (567 g) **Length:**.....28.50" (72.4 cm)
Width:.....17.00" (43.2 cm)

Orange ● Red ● Blue ● Black ●
 RB44055 \$58.50 RB44056 \$58.50 RB44057 \$58.50 RB44058 \$58.50



PMI® ROPE BAG MADE IN THE USA

PMI's exclusive combination of features includes double sewn seams that reinforce the stress points when stuffing your favorite PMI rope. Four sizes to keep gear clean and organized.

Key Features:

- Double sewn seams
- 1000 denier heavy coated Cordura®
- Drawstring closure
- 1" tubular handles with rope insert
- 5/8" grommet on the side of the bag (except personal size)
- Pocket for rope history card
- Internal clip-in loop at bottom of bag
- Holds up to 160 m of 10 mm; 120 m of 11 mm; 92 m of 12.5 mm; 75 m of 16 mm rope

SMALL

Weight:..... 9.0 oz (254 g) **Length:**.....14.50" (36.8 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|------------------|------------------|------------------|------------------|
| Orange ● | Black ● | Blue ● | Red ● |
| RB44009U \$37.00 | RB44010U \$37.00 | RB44011U \$37.00 | RB44012U \$37.00 |

STANDARD

Weight:..... 10.9 oz (309 g) **Length:**.....21.50" (54.6 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|------------------|------------------|------------------|------------------|
| Black ● | Blue ● | Red ● | Orange ● |
| RB44013U \$40.00 | RB44014U \$40.00 | RB44015U \$40.00 | RB44026U \$40.00 |

LARGE

Weight:..... 11.3 oz (320 g) **Length:**.....25.00" (63.5 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|------------------|------------------|------------------|------------------|
| Black ● | Blue ● | Red ● | Orange ● |
| RB44016U \$43.00 | RB44017U \$43.00 | RB44018U \$43.00 | RB44027U \$43.00 |

PMI® ROPE BAG

PMI's exclusive combination of features includes double sewn seams that reinforce the stress points when stuffing your favorite PMI rope. Four sizes to keep gear clean and organized.

Key Features:

- Double sewn seams
- 1000 denier heavy coated Cordura®
- Drawstring closure
- 1" tubular handles with rope insert
- 5/8" grommet on the side of the bag (except personal size)
- Pocket for rope history card
- Internal clip-in loop at bottom of bag
- Holds up to 80 m of 10 mm; 70 m of 11 mm; 46 m of 12.5 mm; 30 m of 16 mm rope

SMALL

Weight:..... 9.0 oz (254 g) **Length:**.....14.50" (36.8 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|-----------------|-----------------|-----------------|-----------------|
| Orange ● | Black ● | Blue ● | Red ● |
| RB44009 \$31.50 | RB44010 \$31.50 | RB44011 \$31.50 | RB44012 \$31.50 |

STANDARD

Weight:..... 10.9 oz (309 g) **Length:**.....21.50" (54.6 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|-----------------|-----------------|-----------------|-----------------|
| Black ● | Blue ● | Red ● | Orange ● |
| RB44013 \$34.00 | RB44014 \$34.00 | RB44015 \$34.00 | RB44026 \$34.00 |

LARGE

Weight:..... 11.3 oz (320 g) **Length:**.....25.00" (63.5 cm)
Width:.....10.50" (26.7 cm)

- | | | | |
|-----------------|-----------------|-----------------|-----------------|
| Black ● | Blue ● | Red ● | Orange ● |
| RB44016 \$37.00 | RB44017 \$37.00 | RB44018 \$37.00 | RB44027 \$37.00 |



ROPE BAG CAPACITIES

MAX ROPE LENGTH FOR PMI® HUDSON CLASSIC PROFESSIONAL

Product Size	10 mm	11 mm	12.5 mm	16 mm	Diameter	Wall Height	Volume (cubic inches)
Personal	12 m				5.5" base tapered to 8"		180
Small	80 m	70 m	46 m	30 m	10.5"	14.5"	1256
Standard	120 m	100 m	75 m	61 m	10.5"	21.5"	1862
Large	160 m	120 m	92 m	75 m	10.5"	25"	2165
X-Large	250 m	200 m	170 m	140 m	16.5"	24"	5132
XX-Large	285 m	230 m	200 m	160 m	16.5"	28"	5987

PMI® DUFFEL MADE IN THE USA

With the same capacity as our large rope bag, the PMI® Duffel is generous enough to hold all your gear. Streamlined and super durable, this duffel can get everything packed up and ready to go in a flash.

Key Features:

- 1000 denier heavy coated Cordura®
- Wrap around padded handle
- Two outside storage pockets with Velcro closure

Weight:..... 1.13 lbs (513 g) **Length:**.....25.00" (63.5 cm)
Width:.....11.00" (27.9 cm)

Red ●
 SG51190U \$82.00



PMI® RIGGERS BAG

Storing gear can be a challenge, and keeping it organized almost impossible... until now. The PMI® Riggers Bag is a soft-sided carrying case. A jumbo main compartment, plus five specially shaped external access pockets keep your hardware separate from your harness, gloves separated from straps, and there is even a special pocket for your helmet.

Key Features:

- 1000 denier heavy coated Cordura®
- Detachable shoulder strap included
- 6 zippered compartments
- Padded handles
- Clear ID holder

Weight:..... 2.60 lbs (1.180 kg) **Length:**.....24.00" (61.0 cm)
Width:.....11.00" (27.9 cm) **Height:**.....12.00" (30.5 cm)

Black ●
 RB44031 \$96.00





PMI® DELUXE ROPE PACK

If you need a bag that holds just about everything (minus a patient), the Deluxe Rope Pack can hold up to that task. This king size bag has all the bells and whistles to store well-loved gear.

Key Features:

- Roomy rope compartment
- Double sewn seams
- 1000 denier heavy coated Cordura®
- Drawstring closure
- Padded backpack straps
- 5/8" grommet on bottom of bag
- 2" webbing carrying handles
- 2 Large outside pockets with snap buckle closure
- Internal clip-in loop at bottom of bag
- Holds up to 160 m of 10 mm; 120 m of 11 mm; 92 m of 12.5 mm; 75 m of 16 mm rope

LARGE

Weight:..... 1.4 lbs (635 g) **Length:**.....25.00" (63.5 cm)
Width:.....10.50" (26.7 cm)

Orange ● Blue ● Red ●
 RB44002 \$102.75 RB44004 \$102.75 RB44006 \$102.75

PMI® GRUNT BUCKET

The Grunt is your essential, suspendable assistant for every job at height. With a reinforced base, 5 gallon capacity, and a suspension handle capable of holding more than 200 pounds, this PVC fabric bucket is the perfect companion for carrying tools, materials, or even liquids during vertical work. THF Welding technology offers robust waterproof construction, while stiffeners maintain the shape of the large top opening. Internal pockets with magnetic closures help organize smaller tools.

- UTILITIES SAFETY
- TOWER WORK
- ROPES COURSE
- ROPE ACCESS
- ARBORIST

Key Features:

- Easy access to tools
- Clic clac pocket closure system
- Reinforced base
- Rigid carrying handle
- Watertight pocket

Weight:..... 3.00 lbs (1.360 kg) **Height:**15.00" (38.1 cm)
Sizing Info:... 1695 cu in (27.8 L) **Width:**.....12.00" (30.5 cm)

Black ●
 RB44062 \$134.95



PMI® PVC GEAR PACK MADE IN THE USA

Rugged PVC Gear Pack is just right for transporting hardware, pre-rigged systems, and other heavy gear. Durable material holds up better than other materials in harsh industrial, cave, or mountain environments.



Key Features:

- PVC Material
- Roll down and buckle closure
- Reinforced bottom for extra protection
- 2" webbing backpack straps with adjustable buckles
- Haul loop
- Holds up to 160 m of 10 mm; 120 m of 11 mm; 92 m of 12.5 mm; 75 m of 16 mm rope

LARGE

Sizing Info: 1862 cu in **Length:**.....21.00" (53.3 cm)
Weight:..... 1.68 lbs (762 g) **Width:**.....10.00" (25.4 cm)

Red ●
 RB44039 \$46.00

PMI® MAGNETA BAG

This sturdy bag is a great way to carry bull-pins and bolts, and attaches readily to your harness belt. A simple closure prevents accidental spills, while a magnetic plate on the front accommodates temporary storage on the outside of the pocket.



Key Features:

- Express closure
- Easy to attach to the harness
- Rigid opening
- Magnetic plate for temporary tool storage

Weight:..... 6.0 oz (170 g) **Width:**.....8.00" (20.3 cm)
Height:10.00" (25.4 cm)

Black ●
 RB44061 \$19.95



American Vertical Rope Techniques
New Revised Edition
 By Bruce Smith and Allen Padgett
 Illustrations by Ron Buffington

- For
- Caving
- Search and Rescue
- Firefighting
- Rope Rescue
- Mountaineering
- Window Cleaning
- River Runners
- Rock Climbing
- Arborists
- Event Riggers
- Military Operations
- Challenge Courses
- Nautical Applications
- Rappellers



by Tom Pendley



Technical Rescue Riggers Guide



Third Edition



Includes Dual Capability New Tension Rope Systems

By Rick Lipke

STRONG AND TEAR RESISTANT



TRAINING AND EDUCATION

PMI knows that YOU are the most important part of ANY work at height or rescue system. That's why we work hard to stay on top of the most current innovations and regulations so that we can bring you the very best training and education possible. Check us out – and let us know what we can do to serve you better!

A Complete Solution

PMI's Vertical Rescue Solutions™ training group offers unparalleled expertise on access, rescue and solutions for your vertical world. We don't just teach rescue—we live it – so the training you get is based on years of hands-on, real-life rescue experience.

VRS™ Custom Courses

Have rope, will travel! If you'd prefer to have your employees trained where they work, just ask! We can tailor our courses to accommodate your needs. Just contact PMI Customer Service at 1-800-282-7673 and ask to speak with a training specialist about a custom course.

Consulting

Got a compliance, access, rescue pre-planning or work at height problem that you'd like to collaborate on? Let us use our regulatory and standards experience to help with your comprehensive managed fall protection plan, build a rope access program, or make a rescue preplan.



PORTABLE HIGH DIRECTIONALS: 3-MODULE SERIES

This course combines Module I, Module II and Module III of the Portable High Directionals Series. Module I is a one-day, basic level introductory course, Module II is a two-day, intermediate level rope technician course and Module III is a two-day advanced level rope technician course. This course combination will instruct participants in the use of portable anchor systems, focusing on the TerrAdaptor™. Rigging theory that supports sound and reliable manipulative skills of all portable anchor configurations congruent with the requirements of NFPA 1670 and 1006 Technician Level and the Basic and Intermediate Force Multiplier Theory of Portable Anchors are key components of Modules I, II and III.

Upon successful completion of Modules I, II and III, all participants will be able to accomplish the skills listed above in the individual course descriptions.

Open Enrollment at PMI Location
VR63012 \$1275.00
Per student

Your Location
VR63013 \$8875.00
Full Class (6 students)

FOR PORTABLE HIGH DIRECTIONALS

PORTABLE HIGH DIRECTIONALS: MODULE I What You Learn:	PORTABLE HIGH DIRECTIONALS: MODULE II What You Learn:	PORTABLE HIGH DIRECTIONALS: MODULE III What You Learn:
<ul style="list-style-type: none"> ✓ Demonstrate proper safety protocols when working with portable anchors ✓ Demonstrate proper assembly of the TerrAdaptor™ Tripod ✓ Understand and construct a back-tie system to stabilize the tripod during operation ✓ Understand and perform basic communication for raises and lowers using a portable anchor <p>Course length: One day course Prerequisites: None</p> <p>Location: 4459 Jason St Denver, CO 80211 Max Class Size: 6 students per instructor</p> <p>VR63014 \$255.00 Per student</p>	<ul style="list-style-type: none"> ✓ Demonstrate proper assembly of the TerrAdaptor™ as a monopod (gin pole) and bi-pod (angled A frame) & elevator shaft portable anchor ✓ Construct and safely operate a high line in addition to a two rope system using a standard tripod configuration as well as mono-pod and bi-pod configurations ✓ Understand intermediate principles of force multipliers as they apply to critical angles and resultant forces ✓ Load sharing and Edge management protocols <p>Course length: One day course Prerequisites: Successful completion of Portable High Directionals: Module I Location: 4459 Jason St Denver, CO 80211 Max Class Size: 6 students per instructor</p> <p>VR63016 \$510.00 Per student</p>	<ul style="list-style-type: none"> ✓ Construct and safely operate high lines and guide lines using all possible combinations of configurations out doors ✓ Understand advanced principles of force multipliers using whiteboard analysis of critical angles in high line rigging and the calculation of critical angles ✓ Rock protection and removable bolts ✓ Portable winch use <p>Course length: Two day course Prerequisites: Successful completion of Portable High Directionals: Module II Location: 4459 Jason St Denver, CO 80211 Max Class Size: 6 students per instructor</p> <p>VR63018 \$510.00 Per student</p>

These courses can be customized for your needs.

We can offer inside or outside scenarios for either work at height applications or for rescue

ROPE ACCESS CERTIFICATION COURSE (SPRAT®)

Adding a Society of Professional Rope Access Technicians (SPRAT®) certification to your toolbox will both improve work at height safety and improve your chances of being hired as employers increasingly rely on SPRAT®-certified workers for their skill and practice in safety and awareness while on the job. This four day course will provide the information and skills you need to pass the SPRAT® certification session that will be held on the fifth day by an independent SPRAT® Evaluator. We offer quality training and SPRAT® certification for Levels 1, 2 and 3.

What You Learn:

- Ascending and descending
- Rope to rope transfers
- Knot craft, Passing knots, friction hitches
- Short and long re-belays
- Passing deviation anchors
- Basic and advanced anchor building
- Advanced rigging and rescue techniques
- Mechanical advantage systems
- Edge Transitions, Passing and installing rope protection

This is a five day course

Open Enrollment at PMI Location
VR63022 \$1675.00
Per student

Your Location
VR63023 \$10750.00
Full Class (6 students)

COMPETENT PERSON PPE INSPECTOR

No one knows your PPE and life safety gear like the people who manufacture and distribute it. PMI's Vertical Rescue Solutions™ can give you and your employees the information and resources to set up and maintain a PPE use and inspection documentation program for the gear you trust your life to.

What You Learn:

- Proper selection, inspection, storage and retirement criteria for PPE and rigging
- Documentaion
- Regulatory considerations

Open Enrollment at PMI Location
VR63020 \$575.00
Per student

Your Location
VR63023 \$10750.00
Full Class (10 students)

TOWER RESCUE FOR THE PROFESSIONAL RESCUER

Even in the very best of scenarios, tower rescue for the professional rescuer can be a daunting task. The dangers of extreme height, high voltage, microwave radiation, radio frequency exposure and gusting winds make tower rescue one of the toughest calls the professional rescuer deals with. This course uses the curriculum established by the National Association of Tower Erectors (NATE®) for Competent Tower Climber/Rescuer and goes one step further by teaching small team tower rescue techniques to the professional rescuer, congruent with NFPA 1670 and 1006.

What You Learn:

- Safe climbing techniques
- Ground-based, tower-based, pickoff rescues
- Tower and antenna-type identification
- Lockout/tagout procedures
- Radio Frequency (RF), microwave and inductive current hazard awareness
- Proper PPE and rigging equipment selection and use

Prerequisites: None
Location: 4459 Jason St Denver, CO 80211

Open Enrollment at PMI Location
VR63030 \$1300.00
Per Student

Max Class Size: 6 students per instructor
This is a three day course

Your Location
VR63031 \$7800.00
Full Class (6 students)

COMPETENT TOWER CLIMBER/ RESCUER

At VRS™, we offer unparalleled custom instruction in cellular and broadcast tower climbing and rescue. Stressing simplicity (no knots!) and a common-sense approach to rescue, the PMI® Tower-Tek™ Rescue Solution is used as the foundation for the rerscue portion of this course.

This course was created to arm those who work at height with the tools, knowledge and expertise to climb safely, and to affect self or companion rescue quickly and efficiently.

This course meets the criteria established by the National Association of Tower Erectors (NATE®) Tower Climber Fall Protection Training Standard (2015 edition). The importance of establishing a rescue pre-plan, the Jobsite Hazard Assessment, OSHA compliance, PPE use, fit and inspection and rescue theory are all addressed. A strong emphasis on multiple repetitions of rescues is used to maintain a high level of participant retention. Suspension Intolerance avoidance and treatment will also be addressed. Prerequisite of Authorized Climber /Rescuer designation from employer is required.

What You Learn:

- Self-Rescue, Mechanical Advantage, Top-Down Rescue, Ground-Based Rescue and Pickoff Rescue
- Safe and Efficient Climbing Techniques
- Proper Documentation
- PPE donning, doffing and inspection

This is a three day course.

Open Enrollment at PMI Location
VR63002 \$1450.00
Per Student

Your Location
VR63003 \$8970.00
Full Class (4 students)



TOWER-TEK™ TRAIN THE TRAINER

Train the Trainer candidates will learn how to effectively teach the VRS curriculum for the Competent Tower Climber/Rescuer Course, utilizing PMI's Tower-Tek™ Rescue Solution for the rescue portion of the course. This curriculum is based on the National Association Tower Erector's Fall Protection Training Guidelines. Upon completion, participants in this course will receive a certificate, reproducible course material and photo ID. They will also be listed on the VRS™ website as VRS™ Approved Trainers for the Tower-Tek™ Rescue Solution.

What You Learn:

- Self Rescue, Rescue by Raise, Rescue by Lower, other assisted rescues
- Competent Climbing Techniques
- Work at Height rules and regulations
- How to best use VRS course materials
- How to administer a successful written test
- How to fill out a VRS skills checklist
- Equipment tips for trainers who want to teach their own CTC/R Course

Prerequisites: Before taking the Trainer Course, potential trainers must have successfully completed the VRS™ Competent Tower Climber/Rescuer Course

This is a one day course

Open Enrollment at PMI Location
VR63034 \$700.00
Per student

Your Location
VR63035 \$3000.00
Full Class (4 students)

ROPE ACCESS FOR THE PROFESSIONAL RESCUER

The great thing about rope access technicians is that they can get to places that almost no one else can. Unfortunately for professional rescuers, this can also make them very difficult to rescue in the event of a mishap. This class will take rescuers who are already Level 1 certified technicians and give them the tools and techniques they need to perform advanced rope access rescues without having to accrue hundreds of hours of experience on a rope access job. Prerequisite of SPRAT or IRATA Level 1 certification, students will receive a VRS certificate of completion, but no additional certifications.

What You Learn:

- Advanced rescue techniques, comparable to a Level III SPRAT® skill set
- Advanced rigging techniques
- Ability to assess the best rescue based on environment, with rescuer safety a priority

This is a two day course

Open Enrollment at PMI Location
VR63028 \$650.00
Per Student

Your Location
VR63029 \$4000.00
Full Class (6 students)

RESCUE FROM FALL PROTECTION

Just as almost every job performed at height is different, so it is that every jobsite rescue performed by those who work at height differs. If you work in an industry where the Fall Protection gear is being worn at height (like window washing, scaffolding, water tower construction and maintenance), this is the course for you. The course also covers rescue of workers who fall onto their Self Retracting Lanyard (SRL) or are hanging suspended. A strong emphasis on multiple repetitions of rescues is used to maintain a high level of participant retention.

What You Learn:

- Self-Rescue, Top-Down Rescue, Ground-Based Rescue and Pickoff Rescue
- Proper Documentation and Rescue pre-plan and theory
- OSHA/ANSI compliance
- PPE use, fit and inspection
- Familiarity with Suspension Intolerance and Mechanical Advantage

Prerequisites: None

Location: 4459 Jason St Denver, CO 80211

This is a three day course

Open Enrollment at PMI Location
VR63000 \$1450.00
Per student

RESCUE FROM FALL PROTECTION – TRAIN THE TRAINER

This course is designed to educate existing professional rope rescue trainers and Health and Safety Trainers on the latest techniques for rescue after a fall using the PMI® Fall-Tek™ Rescue Solution (ANSI Z359.4-2007). The field sessions will cover the best rescue from a variety of scenarios, emphasizing effective approaches to sharing this information with future students. Participants in this course will receive a certificate, reproducible course material and photo ID.

What You Learn:

- Self-Rescue, Top-Down Rescue, Ground-Based Rescue and Pickoff Rescue
- Work at height rules and regulations
- How to best use VRS course materials
- How to teach to your audience
- Equipment tips for trainers who want to teach their own Fall-Tek™ Course

Prerequisites: Successful completion of VRS™ Rescue From Fall Protection: Fall-Tek™ Course

This is a one day course

Open Enrollment at PMI Location
VR63032 \$700.00
Per student

PROFESSIONAL ROPE ACCESS: A GUIDE TO WORKING SAFELY AT HEIGHT

Professional Rope Access: A Guide to Working Safely at Height is a comprehensive guide that employers, safety managers, trainers, and technicians can use to develop and maintain a rope access program that will get more work accomplished at a lower cost and with greater safety than conventional methods can achieve. For many trades, rope access provides an excellent solution for gaining access to difficult-to-reach locations. The extensive amount of knowledge and training that rope access technicians possess, and the highly disciplined and structured system that comprises rope access, mean that more complex jobs can often be performed more safely and efficiently, in a shorter period of time, resulting in monetary and safety benefits.

Key Features:

- Planning For Rope Access such as personnel selection and training and Equipment for Rigging
- Skills For The Rope Access Technician including Rigging Concepts, Advanced Techniques, Powered Devices, and Rescue
- Program Administration from Writing a Work Order through Equipment Inspection & Care



BK13042 \$149.95

TECHNICAL RESCUE RIGGERS GUIDE

Pocket sized quick reference guide to rigging, from Anchors to Z-Rigs. Clear presentation with numerous technical drawings and diagrams. By: Rick Lipke

Key Features:

- Spiral bound
- 191 pages
- 500 clear illustrations and photos
- Full color
- Water and tear-proof paper



BK13003 \$29.95

TECHNICAL RESCUE FIELD OPERATIONS GUIDE

A pocket guide containing command checklist and easy to follow step-by-step procedures for rope, confined space, swiftwater, trench, structural collapse and helicopter rescue.

By: Tom Pendley

Key Features:

- 240 Full Color Illustrations
- Paperback
- 200 pages
- Spiral bound top
- 2011

BK13019 \$26.00



SMALL PARTY ASSISTED RESCUE

Small Party Assisted Rescue skills are instrumental for any rope technician who wishes to be self-sufficient in rescuing an injured member of their own party without assistance from outside resources. While written in context of caving, the skills presented in this book are useful to mountaineers, rescue personnel, fire-rescue, rope access, arborists, and military/police, or any situation where minimal gear, urgency, remoteness, and sub-optimal anchor situations exist. This book covers a wide range of information including Expedition Planning, Decision Making, Medical Considerations, Climbing Systems, Haul Systems, Patient Evacuation, Water Rescue, Contingency, Anchors And More.

Key Features:

- 600 pages
- Double spiral bound
- 1000+ illustrations and photographs

Size: 9"×11"×2"

Weight: 3.8 lbs (1.72kg)

BK13043 \$80.00



Rope

Webbing and Cordage

Personal Gear

Hardware

Solutions and Kits

Patient Care

Logistics and Support Gear

Training and Education

HIGH ANGLE RESCUE TECHNIQUES V4

Your Definitive High Angle Rope Rescue Guide! The fourth edition of High-Angle Rope Rescue Techniques: Levels I & II provides comprehensive coverage of all aspects of high-angle rescue, including planning, PPE and equipment, medical considerations, evacuations, and special rescue operations. Based on the 2013 edition of NFPA 1006, Standard for Technical Rescuer Professional Qualifications, High-Angle Rope Rescue Techniques: Levels I & II provides a broad overview of all rescue techniques to meet the needs of fire service, search and rescue, and many other rope rescue professionals. The fourth edition has been updated to include: Coverage of new protective equipment, terminology, rescue products, and techniques. All new Skill Drills that provide step-by-step instruction on how to execute important skills and procedures. Separation of High-Angle Rope Rescue I & II Level content throughout the textbook and instructor resources.

By: Tom Vines and PMI's own Steve Hudson

Key Features:

- Offers the latest in compliance with nationally recognized standards set by OSHA and the NFPA
- 508 pages
- Full color photos and illustrations
- 2015



BK13007 \$109.95

HIGH ANGLE FIELD GUIDE

Knowledge of high angle rescue is vital to many emergency service personnel. High Angle Rescue Techniques unique step-by-step approach to instruction facilitates the learning process for both trainers and students.

By: Tom Vines and PMI's own Steve Hudson

Key Features:

- Offers the latest in compliance with nationally recognized standards set by OSHA and the NFPA
- 115 pages
- Over 60 illustrations
- Full color photos and illustrations
- 2004



BK13021 \$25.95

FALLS FROM HEIGHT – A GUIDE TO RESCUE PLANNING

How do you rescue someone suspended in midair or trapped above ground? Author Loui McCurley, an expert in technical rope rescue with more than twenty-five years of experience, has the answers. Following her tested and proven advice, readers will learn how to prepare for and safely rescue "at-height" workers and others from "falls from height." The book fully bridges the gap between planning and execution, steering readers toward simple workplace-specific solutions. Moreover, it explains how to develop and implement a comprehensive protection program, enabling all organizations and their employees to fully prepare themselves to respond to a fall from height.

Key Features:

- Hardcover
- 376 pages
- 2013
- Over 200 pictures



BK13040 \$82.95

ON ROPE 2ND EDITION

Excellent reference on descending, ascending, rigging, self rescue, equipment, and much more. A must for the serious ropework scholar.

By: Allen Padgett, Bruce Smith and the National Speleological Society (NSS) Vertical Section

Key Features:

- Over 400 illustrations
- Published by the National Speleological Society



BK13011 \$48.50

MORROW GUIDE TO KNOTS

A compact, practical manual of 70 useful knots. From loops and bends to stopper knots and hitches, this guide includes step-by-step tying instructions, historical data, and useful tips.

ARBORIST

Key Features:

- 640 color photographs
- 255 pages
- 1982

Weight: 15 oz (435 g)

BK13006 \$16.99



0-9			
1" Fall Protection RB Anchor	100		
10.2 mm Spire	22		
10.6 mm Cirque	22		
10.6 mm PMI® Gym Pro	22		
11 mm Latitude	22		
11 mm Max Wear™ PMI® Pit Rope	17		
12.5 mm EZ Bend™ PMI® Hudson Classic Professional Rope with Unicore®	12		
16 mm EZ Bend™ PMI® Hudson Classic Professional Rope	18		
8.1 mm Verglas	22		
8.9 mm Erratic Dynamic Rope	22		
9.4 mm Elite Dynamic Rope	22		
9.9 mm Synergy	22		
A			
Access Pro Rope	19		
Accessory Cord	34		
Adjustable Anchor Sling	103		
Advance Series Litters	120-124		
Advance Tech Haul System	114		
Advance Tech Hx Pulley	77		
Advance Tech Mate	77		
Advantage Helmet	51		
Air-Go Helmet	52		
Alpine Brake Tube	87		
Aluminum Locking D Carabiner	67		
Aluminum Pulleys	77-83		
Anchor Hook	105		
Anchor Sling	103-104		
Ansi Safety Lock Carabiner	66		
Ascenders	75-76		
Autolocking Carabiners	72		
Avatar Diamond Chest Harness	46		
Avatar Contour Harness	44		
Avatar Deluxe Harness	44		
Avatar Harness	44,46		
Avatar Radio Sleeve	60		
B			
Backboards	132-133		
Backcountry Rescue Harness	46		
Bar-Tender	90		
Basket Litter	120-124		
Beam Clamp	105		
Beam Trolley	105		
Belay Gloves	57-59		
Belt	61		
Bokat Rope Washer	25		
Books	147-148		
Brake Bars	89-90		
Brake Racks	87-88		
Braking Devices	84-92		
Brigade Helmet	52		
Bucket Belt	61		
C			
Cammed Pulley	77		
Canvas Pad	28		
Captive Eye Clip	68		
Carabiners & Connectors	64		
Cascade Advance Litters	120-123		
Cascade Professional	123-124		
Cavers Cows Tail	41		
Caving Harness	47		
Choker Sling	103-104		
Classic Professional Rope	14-15		
Comfort Seat	48		
Compact U Rack	87		
Confined Space Harness	45		
Contour Harness	44		
Cordage	34-37		
Cordage Meter	26		
Cordelette	35		
Crane-Tek Rescue Solution	110		
Crossover Carabiner	65		
CS Tech Harness	45		
CT Easy Move	74		
CT Sparrow 200R	86		
Cyclone	35		
D			
D4	84		
D5	85		
Deltic Lanyard	50		
Descenders	84-92		
Descending Ring	101		
Diaper Harness	132		
Dog Harness	133		
Drop Through Anchor	100		
Dura-Shield Explorer Rope	10		
Dura-Shield General Use Rope	19		
Dura-Shield Tech Rope	19		
Dynamic Sewn Lanyard	49		
Dynamic Lanyard	49-50		
Dynamic Rope	21-22		
Dyneema Sling	40		
E			
Ear Muffs	53		
Easy Move	74		
Easy Pickoff Strap	49		
Economy Throw Rope	20,56		
Edge Pad	28		
Edge Protection	30		
Edge Roller	31		
E-Go Helmet	52		
Elbow Pads	61		
Electric Hot Knife	26		
Escape Hook	105		
Escape Kit	109		
Etrier	41		
Evacuation Harness	132		
Extender Gear Leash	50		
Extreme Pro™ Rope W/ Unicore	11		
Ez Bend Rope (Hudson Classic)	12,15,16		
F			
Fall Tek Rescue Solution	110		
Figure 8 Descender	91-92		
Figure 8 W Ears	91-92		
Fingerless Gloves	57		
Fire Escape Kit	109		
Flashlight	54		
Flat Webbing	38		
Flex Edge Protector	30		
Flexible Litters	128-131		
Foot Ascender	76		
Foot Loop	41		
Force 6 PFD	55		
FP Lite Carabiner	65		
Frog Chest Harness	48		
G			
Gear Bucket	136		
Gear Daisy	40		
General Use Anchor Sling	103-104		
Gin-Pole	95-99		
Global Pro Rope	18		
Gloves	57-59		
Goggle Protector	53		
Goggles	53		
Grain Evacuation Tool	111		
Grain Port	111		
Grande Harness	45		
Grip Rope Grab	74		
Group Harness	47		
Grunt Bucket	140		

H		M		Q	
H2-Throw Bag	136	Magneta Bag	141	Quad-Pod	95
Handled Ascender	75	Max Wear™ Rope	17	Quick Draw	40
Hasty Harness	132	Mil-Spec Webbing	38	Quick Roll	75
Haul Kits	114-115	Mini Pulleys	77-80	Quick Step	76
Haulerbiner	114	Mini-Rigging Plate	102	Quick Up	75
Headlamps	54	Mio Rope Grab	74		
Heavyweight Gloves	59	Mono-Pod	95,99		
Helmets	51-52	Mountain D Carabiner	69		
Highline Cache Pro	109				
Hudson Classic Professional Rope	14				
		N		R	
I		NFPA Brake Rack Assembly	87-88	Radio Harness	60
I-Beamer	105	Niteline	37	Radio Sleeve	60
Impact Helmet	52			Radium Release Hitch Kit	115
Intercept Lanyard	50			Rappel Gloves	59
ISC Haulerbiner	114			Rescue 8 W/Ears	91
Isostatic Polyester Rope	13			Rescue Cache Kit	108
		O		Rescue Gloves	57-59
K		Old Glory	11	Rescue Hauler	82
K9 Harness	133	Opus Static Rope	12	Retro-Reflective Rope	18, 35
Kinetic Carabiner	68	Oregon Spine Splint	133	Riggers Bag	139
Kiwi Helmet	51	Oval Carabiner	69	Rigging Plates	102
Knee Pads	61			Rigging Rings	101
Knot Passing Pulley	82	P		Rigging Straps	103-104
Kootenay Pulley	82	Paragon Auto-Lock Carabiner	72	Rigid Litter	120-123
		Paragon Twist Lock Carabiner	72	Roll N' Lock	77
L		Patient Restraint Straps	124	Roller Sling	104
Ladder, Flexible	112	Peltor Ear Muffs	53	Roof Roller	31
Lanyard	49-50	Pensafe Carabiners	69	Rope Bags	136-141
Large D Aluminum Carabiner	68	Personal Escape Rope (PER)	10	Rope Care	25-31
Lighting	54	Personal Flotation Devices	55	Rope Gloves	57-59
Lightweight Rappel Gloves	59	PFD	55	Rope Grabs	74-75
Lite Steel Carabiner	67	Pickoff Strap	49	Rope Guard	27
Litter Bridle	125	Pit Rope	17	Rope Pack	137
Litter Flotation	125	Pit Viper Caving Harness	47	Rope Protector	27-31
Litter Handles	126	PMI® Hudson Classic		Rope Selection Chart	8-9
Litter Protection	124	Professional Rope	14-15	Rope Shorts	29
Litter Spider	125	PMI® Large Steel Figure 8	91-92	Rope Tech Gloves	58
Litter Wheels	126-127	Pmw Hook	105	Rope Tracker	31
Litters	120-131	Pod Helmet	51	Rope Washer	25
Load Release	115	Polyester Rope	13		
Locksafe Triple Action Carabiner	66	Power Sling	40		
LSP Full Body Splint	132	Progress Capture Pulley	77		
LSP Half Back	132	Prosaic Carabiner	72		
Lumiline	35	Pro-Tech Edge Protection	30		
		Prusik Cord	35		
		Prusik Loops (Sewn)	36		
		Prusik Minding Pulley	77-80		
		Pulleys	77-83		

S

Screw Links	73
Seat Harness	46,47
Seatboard	48
Sewn Eye Terminations	23-24
Sewn Webbing Loops	39
Shuttle Tandem Pulley	81
Sked Litters	129-131
Skedco Rescue Hauler	82
SMC Carabiners	65-68
SMC Crossover	65
SMC Descent Control 8	92
SMC Edge Roller	31
SMC Flex	30
SMC Mountaineering 8	91
SMC Personal Escape 8	92
SMC Pro-Tech	30
SMC Roof Roller	31
SMC Rope Tracker	31
SMC Spider	86
Spectrum Harness	47
Spiroll	28
Spooled Cordage	34
Stealth Tech Gloves	58
Steel Carabiner	67
Steel O Ring	101
Steel Sling	104
Striketeam Goggles	53
Supermantle	27
Swaged Terminations	24
Swiftwater Pulley	79
Swivel	101
Sympatico Harness	45

T

Tactical Gloves	57-59
Tactical Harness	47
Technora Cord	35
Technora Sheath Rope	10
Terradaptor	93
Terradaptor & Accessories	93-98
Tie-Off Bars	87-88
Toggle Lok Anchor	100
Tower-Tek Rescue Solution	110
Training Classes	144-146
Tripod	93,99
Tubular Webbing	38
Tuff Cord	36
Twin Lanyard	50

U

Unicore	11-18
Uniform Belt	61
Up Lock	77
U-Rack	88
Urgent Escape Kit	109
USAR Helmet	51
Utility Cord	37

V

Vector Load Management System	99
Victim Harness	132
VRS Courses	144-146

W

Water Rescue Rope	18
Water Rescue Throw Bag	56
Webbing – Sewn Loop	39-40
Webbing – Bulk	38
Webbing – Sewn	39-41
Whip-End Dip	25
Winches	98,117
Wire Choker	104
Wire Slong	104

X

XL Steel Carabiner	65
X-Tricator Goggles	53

Z

Zip Line Pulley	81
-----------------	----

0-9

2-Eyed Prusik 31

A

Access Pro Rope 17
 Accessory Cord 30-33
 Adjustable Anchor Sling 98
 Advance Series Litters 114
 Advance Tech Haul System 109
 Advance Tech Hx Pulley 72
 Advance Tech Mate 72
 Advantage Helmet 47
 Air-Go Helmet 49
 Alpine Brake Tube 81
 Aluminum Locking D Carabiner 65
 Aluminum Pulleys 72-78
 Anchor Hook 101
 Anchor Sling 97-99
 Ansi Safety Lock Carabiner 64
 Artificial High Directional
 Course 138
 Ascenders 71
 Autolocking Carabiners 67
 Avatar Chest Harness 42
 Avatar Contour Harness 40
 Avatar Deluxe Harness 40
 Avatar Harness 40, 42
 Avatar Radio Sleeve 58

B

Backboards 126-127
 Backcountry Rescue Harness 43
 Bantam Beamer 100
 Bar-Tender 84
 Basic Ascender 71
 Basket Litter 114-117
 Beam Clamp 99, 100
 Beam Trolley 100
 Belay Gloves 54-57
 Belt 59
 Bokot Rope Washer 22
 Books 141-142
 Brake Bars 83-84
 Brake Racks 81-84
 Braking Devices 79-86
 Brigade Helmet 48
 Bucket Belt 59

C

Cammed Pulley 72
 Canvas Pad 24
 Captive Eye Clip 66
 Carabiners & Connectors 62
 Cascade Advance Litters 114-115
 Cascade Professional
 Litters 116-117
 Cavers Cows Tail 37
 Caving Harness 44
 Chest Roller Harness 42
 Choker Sling 97, 99
 Circumferential Chest Harness 42
 Classic Professional Rope 13-14
 Classic Sport Rope 14
 Comfort Seat 44
 Compact U Rack 81
 Competent Person Training
 Classes 138-140
 Confined Space Harness 41
 Confined Space Litter 114
 Contour Harness 40
 Cordage 30-33
 Cordage Meter 22
 Cordelette 31
 Cows Tail 46
 Crane-Tek Rescue Solution 106
 Crossover Carabiner 63
 CS Tech Harness 41
 CT Easy Move 70
 CT Sparrow 200R 80
 Cyclone 31

D

D4 79
 D5 79
 Delta Tactical Harness 43
 Deltic Lanyard 46
 Descenders 79-86
 Descending Ring 95, 96
 Diaper Harness 126
 Dog Harness 127
 Dog Harness 127
 Drop Through Anchor 94
 Duffel Bag 133
 Dura-Shield Explorer Rope 10
 Dura-Shield General
 Use Rope 16
 Dura-Shield Tech Rope 16
 Dynamic Sewn Lanyard 45-46
 Dynamic Lanyard 45, 46
 Dynamic Rope 18-19
 Dyneema Sling 36

E

Ear Muffs 50
 Easy Move 70
 Easy Pickoff Strap 35
 Economy Throw Rope 53
 Edge Pad 24
 Edge Protection 23-27
 Edge Roller 27
 E-Go Helmet 49
 Elbow Pads 59
 Electric Hot Knife 23
 Escape Hook 101
 Escape Kit 105
 Ess Nomex Goggle Sleeve 50
 Etrier 38
 Evacuation Harness 126
 Extender Gear Leash 45
 Extreme Pro™ Rope W/ Unicore
 Ez Bend Rope
 (Hudson Classic) 13-14

F

Fall Tek Rescue Solution 106
 Figure 8 Descender 85, 86
 Figure 8 W Ears 85, 86
 Fingerless Gloves 54
 Fire Escape Kit 105
 Flashlight 51
 Flat Webbing 34
 Flex Edge Protector 26
 Flexible Litters 122-125
 Foot Ascender 71
 Foot Loop 38
 Force 6 PFD 52
 FP Lite Carabiner 63
 Frog Chest Harness 44

G

Gear Bucket 132, 134
 Gear Daisy 37
 General Use Anchor Sling 97-98
 Gin-Pole 89, 93
 Global Pro Rope 17
 Gloves 54-57
 Goggle Protector 50
 Goggles 50
 Grain Evacuation Tool 107
 Grain Port 107
 Grain Tube 107
 Grande Harness 41
 Grip Rope Grab 70
 Group Harness 44
 Grunt Bucket 134

H

- H2-Throw Bag 53
- Handled Ascender 71
- Hasty Harness 126
- Haul Kits 109–110
- Haulerbiner 107
- Headlamps 51
- Heavyweight Gloves 56
- Heightec Quantum 70
- Helmets 47–49
- High Angle Rescue Techniques Book 142
- Highline Cache Pro 105
- Hudson Classic Professional Rope 13–14
- Hudson Classic Sport Rope 14

I

- I-Beamer 100
- Impact Helmet 49
- Intercept Lanyard 46
- Isc Haulerbiner 107
- Isostatic Polyester Rope 12

K

- K9 Harness 127
- Kevlar Gloves 57
- Kinetic Carabiner 66
- Kiwi Helmet 48
- Knee Pads 59
- Knot Instruction Book 142
- Knot Passing Pulley 76
- Kootenay Pulley 76

L

- Ladder, Flexible 108, 109
- Lanyard 46
- Large D Aluminum Carabiner 66
- Lighting 51
- Lightweight Rappel Gloves 56
- Lite Steel Carabiner 65
- Litter Bridle 119
- Litter Flotation 119,
- Litter Handles 120
- Litter Protection 118
- Litter Spider 119
- Litter Wheels 120–121
- Litters 114–115
- Load Release 110
- Locksafe Triple Action Carabiner 64
- LSP Full Body Splint 127
- LSP Half Back 126
- Lumiline 31

M

- Magneta Bag 135
- Maillon Rapide 69
- Max Wear™ Rope 15
- Mega Swivel 101
- Mil-Spec Webbing 34
- Mini Pulleys 72–75
- Mini-Rigging Plate 93
- Mio Rope Grab 70
- Mono-Pod 89, 93
- Mountain D Carabiner 68
- Mountain Rescue Harness 43

N

- Nfpa Brake Rack Assembly 81–82
- Niteline 33
- Non-Locking Carabiner 68

O

- Old Glory 11
- Opus Static Rope 11
- Oregon Spine Splint 127
- Oval Carabiner 68

P

- Paragon Auto-Lock Carabiner 67
- Paragon Twist Lock Carabiner 67
- Patient Restraint Straps 118
- Peltor Ear Muffs 50
- Pensafe Carabiners 67
- Personal Escape Rope (PER) 10
- Personal Flotation Devices 52
- PFD 52
- Pickoff Strap 35
- Pit Rope 15
- Pit Viper Caving Harness 44
- PMI® Chest Roller - Double
- PMI® Hudson Classic Professional Rope 13–14
- PMI® Hudson Classic Sport Rope 14
- PMI® Large Steel Figure 8 85
- Pmw Hook 101
- Pod Helmet 47
- Polyester Rope 12
- Polypropylene Rope 53
- Power Sling 36
- Ppe Inspection Training 139
- Progress Capture Pulley 72
- Prosaic Carabiner 68
- Pro-Tech Edge Protection 25
- Prusik Cord 31–32
- Prusik Loops (Sewn) 32
- Prusik Minding Pulley 72–75
- Pulleys 72–78

Q

- Quad-Pod 89, 93
- Quantum 70
- Quick Draw 36
- Quick Roll 71
- Quick Step 71
- Quick Up 71

R

- Radio Harness 58
- Radio Sleeve 58
- Radium Release Hitch Kit 110
- Rappel Gloves 55–57
- Removable Bolts 94–95
- Rescue 8 W/Ears 85, 86
- Rescue Cache Kit 104
- Rescue Gloves 54–57
- Rescue Hauler 77
- Rescue Planning Book 142
- Rescue Technician Gloves 57
- Retro-Reflective Rope 16
- Retro-Reflective Water Riggers Bag 133
- Rigging Plates 93, 96
- Rigging Rings 95, 96
- Rigging Straps 97–99
- Rigid Litter 114–117
- Roll N' Lock 72
- Roller Sling 99
- Roof Roller 27
- Rope Access Book 141
- Rope Access Training 139
- Rope Bags 130–135
- Rope Care 22–27
- Rope Gloves 54–57
- Rope Grabs 70–71
- Rope Guard 23
- Rope Pack 134
- Rope Protector 23–27
- Rope Selection Chart 8–9
- Rope Shorts 25
- Rope Tech Gloves 55
- Rope Tracker 26
- Rope Washer 22
- Rtg Gloves 57

Rope

Webbing and Cordage

Personal Gear

Hardware

Solutions and Kits

Patient Care

Logistics and Support Gear

Training and Education



Pigeon Mountain Industries INC.
PO Box 803 LaFayette, GA 30728 USA
1-706-764-1437
800-282-ROPE (7673)
custserv@pmirope.com
pmirope.com

