PFP-18HPVGD-HP

HIGH PRESSURE PUMP

This high pressure Vanguard pump goes up to 300 PSI. Engine and pump are mounted on a protective frame made of steel with shock absorbent and folding handles.



ENGINE SPECIFICATIONS

- Vanguard. model 3564, air cooled engine
- 2-cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank


PUMP UNIT SPECIFICATIONS

- Transmission drive C.E.T. single stage centrifugal pump
- Belt drive transmission
- Pump body made from high resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Exhaust priming system, guaranteed up to 20' (6 meter lift)
- One 1-1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2-1/2" (65 mm) suction inlet
- Dimensions: Length: 27.5" (700 mm);
 Width: 22" (559 mm); Height: 24" (610 mm)
- Weight: 162 lbs (74 kg)

INCLUDED ACCESSORIES

- 16 Amps alternator
- 12-V Battery
- Pressure gauge

PERFORMANCE

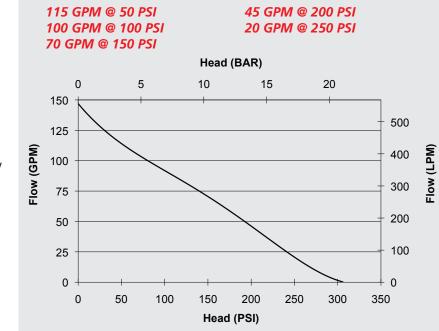

LIMITED WARRANTY

3 YEARS





A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90, Pierreville (Québec) Canada J0G 1J0 Phone : 1-800-567-2719

Phone: 1-800-567-2719 Fax: 1-800-434-2613 www.fire-pumps.com