

PFP-20HPKHL-HP

PRESSURE AND VOLUME PUMP

This high pressure Kohler pump goes up to 300 psi. Engine and pump are mounted on a protective frame made of steel with shock absorbent and folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup.
- 6 gallon (22 l) detachable fuel tank.
The fuel tank is made from plastic
- 20 amp. charging, regulated

PUMP UNIT SPECIFICATIONS


- Transmission drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Belt drive transmission
- Exhaust priming system, guaranteed up to 20' (6 meter) lift.
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 22" (558 mm);
Width: 25" (635 mm); Height: 23" (584 mm)
- Weight: 180 lbs (81 kg)

INCLUDED ACCESSORIES

- Pressure gauge
- 12-V battery

PERFORMANCE

- 160 GPM @ 10 PSI
- 145 GPM @ 50 PSI
- 125 GPM @ 100 PSI
- 90 GPM @ 150 PSI
- 55 GPM @ 200 PSI
- 20 GPM @ 275 PSI

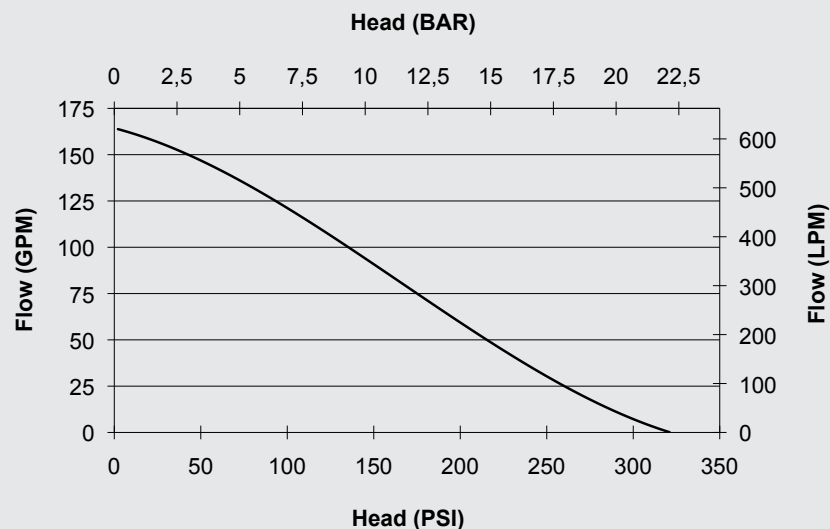

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com