PFP-23HPVGD-MR

VANGUARD POWERED PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- Vanguard, model 380000, air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank

PUMP UNIT SPECIFICATIONS


- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 21 1/4" (540 mm)
 Width: 26 1/2" (673 mm); Height: 24" (610 mm)
- Weight: 165.2 lbs (75 kg)

INCLUDED ACCESSORIES

- Swivel spotlight
- 20 Amps alternator
- Pressure gauge
- Low oil alert
- 12-V battery

PERFORMANCE

MAX FLOW: 300 GPM MAX PRESSURE: 250 PSI 265 GPM @ 50 PSI 195 GPM @ 100 PSI 150 GPM @ 150 PSI 80 GPM @ 200 PSI

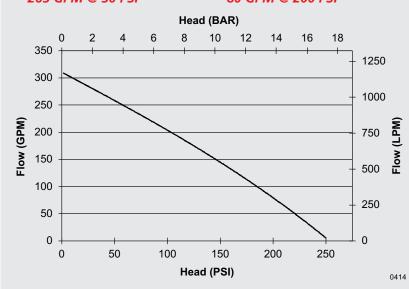

LIMITED WARRANTY

• 3 YEARS





A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90, Pierreville (Québec) Canada JOG 1J0 Phone : 1-800-567-2719

Fax : 1-800-434-2613 www.fire-pumps.com