

**FLASHLIGHTS - PELICAN LIMITED LIFETIME GUARANTEE OF EXCELLENCE**

Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see http://www.pelican.com/warranty. In Australia: www.pelican.com/warranty/australia.


**REMOTE AREA LIGHTING SYSTEMS - PELICAN**

**1 YEAR LIMITED WARRANTY FOR RALS PRODUCTS**

Pelican Products, Inc. guarantees to the original purchaser of its RALS products that its products will be free of defects in materials and workmanship for one year from the date of purchase. All warranty claims of any nature are barred if the product has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident. For complete warranty details, see http://www.pelican.com/warranty. In Australia: www.pelican.com/warranty/australia.



PELICAN  
LIGHTS CATALOG  
TOUGH LIGHTING TOOLS  
FEBRUARY 2019



**U.S.A.** **INTERNATIONAL**

<b>CALIFORNIA</b> 23215 Early Avenue Torrance, CA 90505 Tel: 310.326.4700 800.473.5422 Fax: 310.326.3311 www.pelican.com	<b>MASSACHUSETTS</b> 147 North Main Street Torrance, MA 01373 Tel: 800.542.7344 Fax: 413.665.8330 www.pelican.com	<b>EUROPE, MIDDLE EAST AND AFRICA</b> Peli Products, S.L.U. c/ Provença, 388, Planta 7 Barcelona, Spain, 08025 Tel: +34.934.674.999 Fax: +34.934.877.393 www.peli.com	<b>JAPAN</b> Pelican Products K.K. Nisso 22 Bldg 9F 1-11-10 Azabu Dai Minato ward Tokyo Japan 106-0041 Tel: +81.33.585.9100 Fax: +81.33.585.9109 www.pelican.com/jp
--	--	---	---

<b>CANADA</b> Pelican Products ULC 10221-184th Street Edmonton, Alberta T5S 2J4, Canada Tel: +780.481.6076 Fax: +780.481.9586 www.pelican.ca	<b>AUSTRALIA</b> Pelican Products Pty Ltd West Wing, Platinum Building, Suite 2.33 4 Ilya Av Erina NSW 2250 Tel: +612.4367.7022 Fax: +612.4367.7066 www.pelicanaustralia.com	<b>CHINA</b> Pelican Products China Representative Office Pine City Building, Room 1026 777 Zhaojiabang Road Shanghai, China 200032 Tel: +86.21.64189685 Fax: +86.21.64189679 www.pelican.com/cn	<b>KOREA</b> Pelican Products Korea Ltd #909 Hyundai 41 Tower, #2616 917-9, Mok-dong, Yangchon-gu, Seoul, Korea 158-050 Tel: +82.2.6092.4700 Fax: +82.2.6739.4700 www.pelican.com/ko
---	---	---	--

<b>INDIA and SOUTH ASIA (Bangladesh, Bhutan, Maldives, Nepal, Sri Lanka)</b> Pelican Products and Services India Pvt. Ltd. GF 9&10, Augusta Point Sector-53, Golf Course Road Haryana, Gurgaon 122002, India Tel: +91.124.4377227 Fax: +91.124.4049227 www.pelican.com	<b>SE ASIA and rest of ASIA (Hong Kong, Macau, Taiwan, Pakistan)</b> No.777, Pine City Building ZhaoJiaBang Road #10-26 XuHui District Shanghai, China 200032 Phone: +86.21.64189685 Fax: +86.21.64189679 www.pelican.com	<b>LATIN AMERICA</b> 23215 Early Avenue Torrance, California 90505 USA Tel: +1.310.326.4700 x1462 Fax: +1.310.325.5740 www.pelican.com
---	---	---



©2019 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates. Lexan® is a registered trademark of SABIC. iOS is a registered trademark of Apple, Inc. BLUETOOTH is a registered trademark of Bluetooth Sig, Inc. Android is a trademark of Google Inc. BLACK JACK™ is a trademark of 1445 Designs Corporation. 3M is a trademark of 3M Company

**DISTRIBUTED BY:**



**DEAR CUSTOMER,**

Lighting tools – they're a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you're in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of advanced lighting systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (see page 1) and continue to increase the number of industry leading safety certificates for specific models.

Our new lighting catalog features multiple technology advances. These include state of the art LED performance upgrades, new electronic features, upgraded safety certificates and enhanced packaging. We are committed to environmentally responsible manufacturing, in fact most of our lights use LED bulbs that help protect our planet. LEDs are long lasting, promote extended battery life and allow for the latest technological advancements.

From basic models to the high-performance 9410L LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 12,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican's industry-leading guarantee of excellence.

We invite you to look through our new catalog and discover the ideal lighting tools for your specific needs.

CEO and President  
Lyndon Faulkner

MARKETS SERVED //

**FIRE**  
**MILITARY**  
**INDUSTRIAL**  
**LAW ENFORCEMENT**  
**OUTDOOR**  
**CONSUMER**  
**DIVE**

# PELICAN LIGHTS

PRODUCT LINE OVERVIEW

5 SERIES LIGHTS PGS 3 - 4				CORRECT COLOR LIGHTS PGS 5 - 6					REMOTE AREA LIGHTING SYSTEMS PGS 7 - 10												
5000 NEW	5010 NEW	5020 NEW	5050R NEW	2750CC NEW	2755CC NEW	3310CC NEW	3315CC NEW	3410CC NEW	3415CC NEW	9430	9430SL	9440	9455	9460	9460M	9470	9470M	9480	9490	9500	9600 NEW
SMALL LIGHTS PGS 11 - 12								MEDIUM LIGHTS PGS 13 - 16													
1810	1830	1910	1920	1930	1965	1970 NEW	1975 NEW	2220	2010	2010PL	2410	2410PL	2460	3310PL	3310ELS	3310R	3315	3315PL	3315R	3325	3345 NEW
LARGE LIGHTS PGS 17 - 18				TACTICAL LIGHTS PGS 19 - 20																	
9410L	9415	2350	2360	2370	PM6 3330	7000	7060	7070R NEW	7100	7110 NEW	7600	7610 NEW	7620 NEW	8060							
HEADLAMPS PGS 21 - 24																					
2610	2690	2720	2740	2745	2750	2755	2760	2765	2780	2780R	2785										
RIGHT ANGLE LIGHTS PGS 25 - 28												DIVE LIGHTS PGS 29 - 30			SPECIALTY LIGHTS PGS 31 - 32						
3310R-RA	3315R-RA	3410	3410M	3415	3415M	3610	3610PL	3660	3715	3715PL	3765	3765PL	1960N	2010N	2410N	2130	2130IR	2365	2490		



## PELICAN LIGHTING TOOLS: MORE THAN JUST FLASHLIGHTS.

Here are just a few features that make our lighting tools shine:



**WIRELESS BLUETOOTH™ CONTROL**  
(on select models only)



**SELF PROGRAMMABLE**  
(on select models only)




**GESTURE ACTIVATION**  
(on select models only)



**PHOTOLUMINESCENT DESIGNS**  
(on select models only)



**BATTERY LEVEL INDICATION**  
(on select models only)



**DOWNCAST LIGHTING FEATURES**  
(on select models only)



**SUBMERSIBLE APPLICATIONS**  
(on select models only)



**LEGENDARY LIFETIME GUARANTEE**



**INTELLIGENT CONTROL**  
(on select models only)



# TABLE OF CONTENTS

PERFORMANCE & SAFETY	1-2
5 SERIES LIGHTS	3-4
CORRECT COLOR LIGHTS	5-6
REMOTE AREA LIGHTING SYSTEMS	7-10
SMALL LIGHTS	11-12
MEDIUM LIGHTS	13-16
LARGE LIGHTS	17-18
TACTICAL LIGHTS	19-20
HEADLAMPS	21-24
RIGHT ANGLE LIGHTS	25-28
DIVE LIGHTS	29-30
SPECIALTY LIGHTS	31-32
LIGHT MOUNTING SYSTEMS	
HOLSTERS AND HELMET HOLDERS	33-34
SPECIFICATIONS	35-38
CUSTOM LABELS   LIGHTING FEATURES	39-40

[www.pelican.com](http://www.pelican.com)

# PERFORMANCE

## ANSI STANDARDS (AMERICAN NATIONAL STANDARDS INSTITUTE)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific needs. As a result, the American National Standards Institute (ANSI), with input from the


flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

The resulting ANSI/NEMA FL 1 Standards include the following six criteria:

### STANDARDS AND RATINGS (APPLICABLE TO FLASHLIGHTS ONLY)

**LIGHT OUTPUT**  
Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.

**RUN TIME**  
Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.

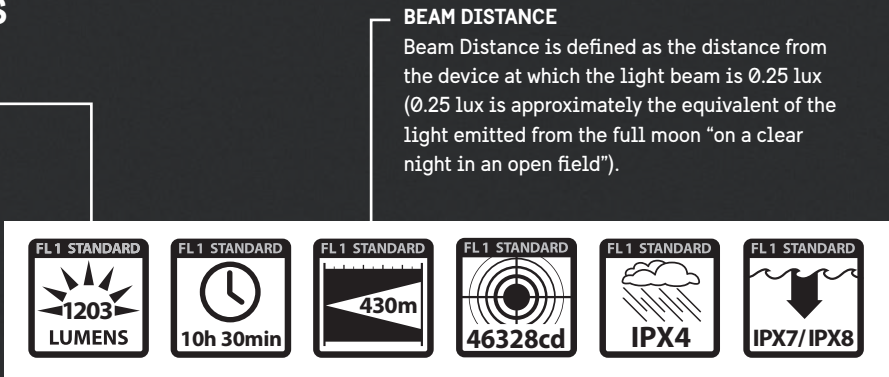

**BEAM DISTANCE**  
Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").

**PEAK BEAM INTENSITY**  
Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.

**WATER RESISTANT**  
Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.

**WATERPROOF/SUBMERSIBLE**  
Water Proof // IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time. Submersible // IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

### GLOSSARY OF TERMS

**Candela** A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

**Lux** The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**Lumen** A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.

**Integrating Sphere** An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffused with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**Rechargeable** Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.

**IP (Ingress Protection)** – These ratings specify the environmental protection the enclosure provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) whereas the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids as described by the IP Rating System (Solids vary from 0-6 IP rating, Liquids vary from 0-8 IP rating).




## INTRINSICALLY SAFE. YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS

Whether working in a Class I Oil Refinery or in the silo of a Class III Textile Mill, safety is always a concern and your lighting tool shouldn't add to your worries. Pelican builds lighting tools certified for hazardous work environments. In fact we make more safety approved lights certified for **Class I II III Div. 1** and groups **ABCDEFG** than anyone else. To find the right light for your job visit us at [Pelican.com/safety](http://Pelican.com/safety).

#### HAZARDOUS AREA ELECTRICAL GUIDELINES

	CLASSIFICATIONS	SUBSTANCE	TYPICAL ENVIRONMENTS
CLASS I	DIVISION 1	Flammable Gases, Vapors, or Liquids	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
	DIVISION 2		
CLASS II	DIVISION 1	Combustible Dusts	Coal Mine, Munitions Factory, Grain Silo, Hay Storage Facility
	DIVISION 2		
CLASS III	DIVISION 1	Ignitable Fibers & Flyings	Paper Mill, Woodworking Facility, Textile Mill, Cotton Gin
	DIVISION 2		

**Division 1 (hazard likely):** Where volatile substances can exist all of the time or some of the time under normal operating conditions.  
**Division 2 (hazard not likely):** Where volatile substances are not likely to exist under normal operating conditions.

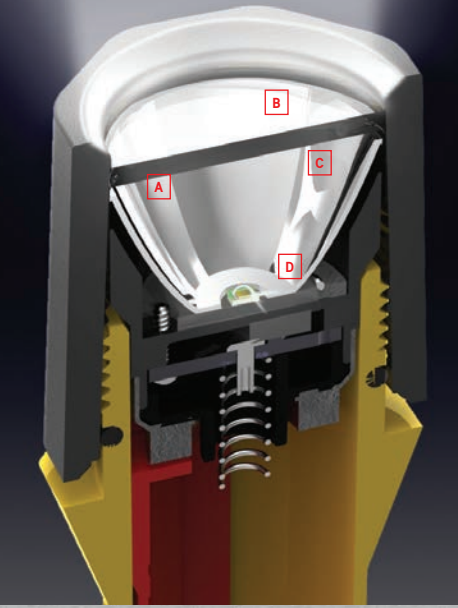

### NEW DEEP MOUNT LED TECHNOLOGY

Our engineering team has designed a new high performance LED lamp module (Deep Mount LED Module). These lights are now brighter, with close to 100% increase in lumens and a 2.5 times increase in lux value over previous versions (as well as offering a more robust design).

- A** New deep dish reflector provides up to 2.5 times lux increase, and 100% lumen increase
- B** Robust, over-molded polycarbonate lens won't yellow
- C** Opti-mechanical design gathers and focuses 100% of the light
- D** LED is mounted directly to the PCB board, creating a strong and efficient design solution

# 5 SERIES FLASHLIGHTS

Our new 5 Series flashlights feature slide beam technology. The flood position projects a wide beam to illuminate your work area or use the spot beam for a long distance focused beam.

← FLOOD BEAM

UP TO 78° BEAM SPREAD

UP TO 250 YARDS OF LONG  
DISTANCE VISIBILITY

SPOT BEAM →

SLIDE BEAM TECHNOLOGY

5000

LIGHT SOURCE //  
LED  
BATTERIES //  
2 AAA Alkaline (included)  
LENGTH //  
5.59" (14.2 cm)  
MODES //  
High / Low / Flashing



NEW

LUMENS  
202  
RUN TIME  
7h  
UP TO

5010

LIGHT SOURCE //  
LED  
BATTERIES //  
2 AA Alkaline (included)  
LENGTH //  
6.26" (15.9 cm)  
MODES //  
High / Low / Flashing



NEW

LUMENS  
392  
RUN TIME  
26h  
UP TO

5020

LIGHT SOURCE //  
LED  
BATTERIES //  
4 AAA Alkaline (included)  
LENGTH //  
5.87" (14.9 cm)  
MODES //  
High / Medium / Low / Flashing



NEW

LUMENS  
586  
RUN TIME  
27h  
UP TO

5050R

LIGHT SOURCE //  
LED  
BATTERIES //  
Lithium-Ion (included)  
LENGTH //  
6.16" (15.6 cm)  
MODES //  
Boost / High / Low / Flashing




NEW

LUMENS  
883  
RUN TIME  
40h  
UP TO



USB

# CORRECT COLOR FLASHLIGHTS

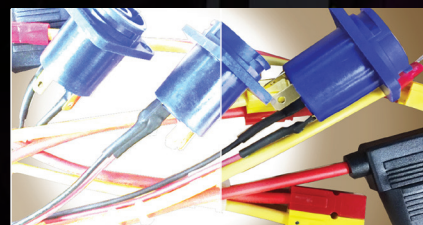

70 CRI  
CONVENTIONAL  
FLASHLIGHTS

90+ CRI  
CORRECT  
COLOR TECHNOLOGY

When you can't see the difference between one color cable and another, the job may be compromised. Now you can trust our select flashlights with new Correct Color technology to end the guess work.



## 2750CC HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7cm)  
 MODES // High / Low / Flashing  
 (Photoluminescent)



NEW

LUMENS  
183  
RUN TIME  
11h

## 2755CC HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing  
 CERTIFICATIONS // CI, D1, IECEx ia  
 (Photoluminescent)



NEW

LUMENS  
72  
RUN TIME  
15h

## 3310CC

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6 cm)  
 MODES // High / Low / Flashing  
 (Photoluminescent)



NEW

LUMENS  
238  
RUN TIME  
175h

## 3315CC

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6 cm)  
 MODES // On / Off  
 CERTIFICATIONS // CI II II, D1, IECEx ia  
 (Photoluminescent)



NEW

LUMENS  
130  
RUN TIME  
16h 30m

## 3410MCC

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (not included)  
 LENGTH // 7.44" (18.9 cm)  
 MODES // High / Medium / Low / Flashing  
 Spot / Flood / Both  
 (Photoluminescent)



NEW

LUMENS  
484  
RUN TIME  
67h

3410MCC Includes  
Magnetic Clip

## 3415MCC

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (not included)  
 LENGTH // 7.44" (18.9 cm)  
 MODES // High / Flashing  
 Spot / Flood / Both  
 CERTIFICATIONS // CI II II, D1, IECEx ia  
 (Photoluminescent)



NEW

LUMENS  
258  
RUN TIME  
13h

3415MCC Includes  
Magnetic Clip



# RAALS

## REMOTE AREA LIGHTING SYSTEMS

Providing increased performance, safer working conditions, emergency preparedness and greater flexibility, Pelican's RALS line is the modern alternative to generator based lighting:

- Silent performance
- No exhaust fumes
- No flammable fuel
- Remote activation
- Eliminated trip hazards
- Little to no heat

### 9430 RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
 MODES // High / Low  
 BEAM SPREAD // 125°, 6 LEDs

LUMENS  
 3000  
 RUN TIME  
 UP TO  
 15h



### 9430SL SPOT LIGHT RALS

LIGHT SOURCE // LED  
 BATTERIES // Sealed Lead Acid  
 DIMENSIONS // 15.75" (40 cm) Closed, 32.28" (82 cm) Extended  
 MODES // High / Low  
 BEAM SPREAD // 10°, 24 LEDs


LUMENS  
 2000  
 RUN TIME  
 UP TO  
 15h



### 9600 RALS

LIGHT SOURCE // LED  
 INPUT VOLTAGE // 110v - 240v  
 DIMENSIONS // Light Head - 18.31" x 8.27" x 4.72" (46.5 x 21 x 12 cm) Extended - 120" (304.8 cm) [with base & pole]  
 BEAM SPREAD // 125°, 14 LEDs

LUMENS  
 3000  
 RUN TIME  
 UP TO

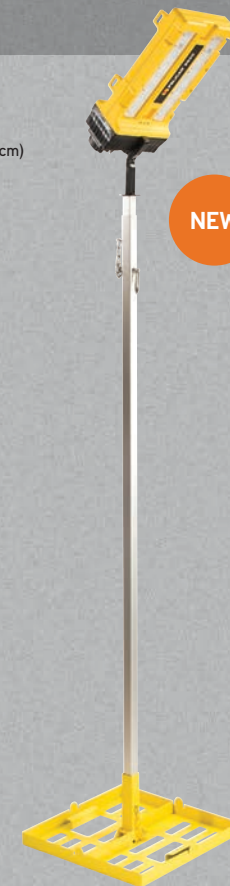

NEW

\*Shown with base & pole accessories

### 9440 RALS

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion  
 DIMENSIONS // 37.4" (95 cm) Closed, 85" (215.8 cm) Extended  
 MODES // High / Medium / Low  
 BEAM SPREAD // 120°, 10 LEDs

LUMENS  
 5300  
 RUN TIME  
 UP TO  
 8h



### 9455 SAFETY LIGHT RALS

LIGHT SOURCE // LED  
 BATTERIES // NiMH  
 DIMENSIONS // 15.35" (39 cm) Closed, 31.50" (80 cm) Extended  
 MODES // High / Low / Flashing  
 BEAM SPREAD // 125°, 10 LEDs  
 CERTIFICATIONS // CI, D1, IECEx ia, ATEX Zone 0

LUMENS  
 1600  
 RUN TIME  
 UP TO  
 10h




### 9500 SHELTER LIGHTING SYSTEM

LIGHT SOURCE // LED  
 INPUT VOLTAGE // 110-240vac  
 DIMENSIONS // 20.62" (52.4 cm) Closed, 157.5" (399.9 cm) Extended  
 LIGHT OUTPUT // 6000 (White LED) Per Head, 1200 (Red LED) Per Head  
 BEAM SPREAD // 210° Diffused, 36 LEDs per head (24 White/12 Red), 3 lamp heads  
 PELICAN CASE // Included

LUMENS  
 6000  
 RUN TIME  
 UP TO

Select between white light or red night vision mode

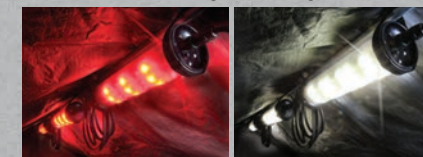

## 9460/9460M RALS

**LIGHT SOURCE** // LED  
**BATTERIES** // Sealed Lead Acid  
**DIMENSIONS** // 23.25" (59.1 cm) Closed, 79.50" (201.9 cm) Deployed  
**MODES** // Variable Light Output / Flashing / 3 Preset Levels  
**BEAM SPREAD** // 120°, 10 LEDs per head, 2 lamp heads



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9460



9460M




## 9460, 9460M, 9470, 9470M FEATURES



**12V POWER SUPPLY WITH DUAL USB ADAPTER**  
 12 volt power supply port can be used to power any electrical product that utilizes a standard 12v vehicle style connector (up to 4 amps) or a variety of USB connections.



**BLUETOOTH™ CONTROL**  
 Bluetooth app controls multiple units and variable light from 0-100% output. Free App for iOS™ and Android™.



**MULTI-TERRAIN TROLLEY (ONLY ON 9460M, 9470M)**  
 Large 1.5 inch polyurethane wheels allow for easier transport across rough surfaces. Molded feet level and stabilize case.

## 9470/9470M RALS

**LIGHT SOURCE** // LED  
**BATTERIES** // Sealed Lead Acid  
**DIMENSIONS** // 24.75" (62.9 cm) Closed, 80.00" (208.3 cm) Deployed  
**MODES** // Variable Light Output / Flashing / 3 Preset Levels  
**BEAM SPREAD** // 120°, 10 LEDs per head, 4 lamp heads



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



9470




9470M



## 9480 RALS

**LIGHT SOURCE** // LED  
**BATTERIES** // Sealed Lead Acid  
**DIMENSIONS** // 15.50" (39.4 cm) Closed, 23.75" (60.3 cm) Deployed  
**MODES** // High / Medium / Low / Flashing  
**BEAM SPREAD** // 125°, 8 LEDs



**SWAPPABLE POWER PACK**  
 Swappable power pack w/12v aux. port adapter powers smartphones, laptops, etc.



**BATTERY LEVEL INDICATOR**  
 Full time battery level indication.

## 9490 RALS

**LIGHT SOURCE** // LED  
**BATTERIES** // Sealed Lead Acid  
**DIMENSIONS** // 20" (50.8 cm) Closed, 72" (182.9 cm) Deployed  
**MODES** // High / Medium / Low / Flashing / (6000-Variable)  
**BEAM SPREAD** // 125°, 10 LEDs



**INTELLIGENT CONTROL SYSTEM**  
 calculates and displays current battery life, allowing the user to regulate the intensity of the light and choose the desired run time.



**BLUETOOTH™ CONTROL**  
 Bluetooth app controls multiple units and variable light from 0-100% output Free App for iOS™ and Android™.



REMOTE AREA LIGHTING SYSTEMS





# SMALL LIGHTS

When compact size is a must or just a convenience, choose from Pelican's range of powerful lights. Whether composite or alloy, certified or colored, you'll find the perfect model for your next job.

## 1810

LIGHT SOURCE // LED  
 BATTERIES // 4 LR 41 Alkaline (included)  
 LENGTH // 1.50" (3.8 cm)



LUMENS  
**16**  
RUN TIME  
8h 30m

## L4™ 1830

LIGHT SOURCE // LED  
 BATTERIES // 3 AAAA Alkaline (included)  
 LENGTH // 6.2" (15.7cm)  
 CERTIFICATIONS // CI, D1



LUMENS  
**5**  
RUN TIME  
32h  
SAFETY CERTIFIED

## 1910

LIGHT SOURCE // LED  
 BATTERIES // 1 AAA Alkaline (included)  
 LENGTH // 3.8" (9.7cm)  
 MODES // High / Low



LUMENS  
**106**  
RUN TIME  
4h  
UP TO

## 1920

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.5" (14.0cm)  
 MODES // High / Low



LUMENS  
**224**  
RUN TIME  
8h 45m  
UP TO

## L1™ 1930

LIGHT SOURCE // LED  
 BATTERIES // 4 LR 44 Alkaline (included)  
 LENGTH // 2.64" (6.7cm)  
 CERTIFICATIONS // CI, D1/CII, D2



LUMENS  
**12**  
RUN TIME  
4h 15m  
SAFETY CERTIFIED

## MITYLITE™ 1965

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.48" (13.9cm)  
 CERTIFICATIONS // CI II III, D1



LUMENS  
**87**  
RUN TIME  
2h 30m  
SAFETY CERTIFIED

## 1970

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.75" (14.6cm)  
 MODES // High



NEW

LUMENS  
**139**  
RUN TIME  
4h 15m

## 1975

LIGHT SOURCE // LED  
 BATTERIES // 2 AAA Alkaline (included)  
 LENGTH // 5.75" (14.6cm)  
 CERTIFICATIONS // CI II III, D1



NEW

LUMENS  
**117**  
RUN TIME  
2h 15m  
SAFETY APPROVED

## VB3™ 2220

LIGHT SOURCE // LED  
 BATTERIES // 2 CR2032 Lithium (included)  
 LENGTH // 3.5" (8.9cm)  
 CERTIFICATIONS // CI, D1



LUMENS  
**9**  
RUN TIME  
34h  
SAFETY CERTIFIED

# MEDIUM LIGHTS

Nothing beats the versatility of a hand-held light. Easy to carry, stash in a pocket, or clip to a helmet, these lights do just about everything. And when hazardous areas are present, you can count on Pelican's line of safety certified lighting tools. You'll even find photoluminescent models made with "glow-in-the-dark" material to help you find your flashlight in an emergency.



## SABRELITE™ 2010

LIGHT SOURCE // LED  
 BATTERIES // 3 C Alkaline (not included)  
 LENGTH // 8.11" (20.6cm)  
 CERTIFICATIONS // CI II III, D1



**SAFETY CERTIFIED**  
 LUMENS 161  
 RUN TIME 22h

## SABRELITE™ 2010PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
 BATTERIES // 3 C Alkaline (not included)  
 LENGTH // 8.11" (20.6cm)  
 CERTIFICATIONS // CI II III, D1



**SAFETY CERTIFIED**  
 LUMENS 161  
 RUN TIME 22h

## STEALTHLITE™ 2410 LED

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 7" (17.8cm)  
 CERTIFICATIONS // CI II III, D1



**SAFETY CERTIFIED**  
 LUMENS 183  
 RUN TIME 5h 45m

## STEALTHLITE™ 2410PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 7" (17.8cm)  
 CERTIFICATIONS // CI, II, III D1



**SAFETY CERTIFIED**  
 LUMENS 183  
 RUN TIME 5h 45m

## 3310PL PHOTOLUMINESCENT

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6cm)  
 MODES // High / Low / Flashing  
 (flashlight body glows in the dark)  
 (Photoluminescent)



**SAFETY CERTIFIED**  
 LUMENS 378  
 RUN TIME UP TO 202h

## 3310ELS (EMERGENCY LIGHTING SYSTEM)

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (15.6cm)  
 INCLUDES // 3310PL and Wall Mountable Case  
 (flashlight body glows in the dark)  
 (Photoluminescent)



**SAFETY CERTIFIED**  
 LUMENS 378  
 RUN TIME UP TO 202h

## STEALTHLITE™ 2460

LIGHT SOURCE // LED  
 BATTERIES // NiMH (included)  
 LENGTH // 7" (17.8cm)  
 CERTIFICATIONS // CI II, D2



**SAFETY CERTIFIED**  
 LUMENS 183  
 RUN TIME 5h

## 3310R

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.11" (15.5cm)  
 MODES // Boost / High / Low



**SAFETY CERTIFIED**  
 LUMENS 1067  
 RUN TIME UP TO 50h



MEDIUM LIGHTS

### 3315

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (11.8cm)  
 CERTIFICATIONS // CI II III, D1




LUMENS
<b>160</b>
RUN TIME
<b>19h</b>

SAFETY CERTIFIED

### 3315PL PHOTOLUMINESCENT

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.14" (11.8cm)  
 CERTIFICATIONS // CI II III, D1



LUMENS
<b>160</b>
RUN TIME
<b>19h</b>

SAFETY CERTIFIED

### 3315R



LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.11" (15.5cm)  
 CERTIFICATIONS // CI, D1



LUMENS
<b>132</b>
RUN TIME
<b>34h</b>

SAFETY CERTIFIED

### 3325

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (included)  
 LENGTH // 6.06" (15.4cm)  
 CERTIFICATIONS // CI, D1, IECEx ia



LUMENS
<b>162</b>
RUN TIME
<b>16h</b>

SAFETY CERTIFIED

### 3345

LIGHT SOURCE // LED  
 BATTERIES // 3 AA Alkaline (not included)  
 LENGTH // 7.25" (18.4cm)  
 CERTIFICATIONS // CI II III, D1, IECEx ia



LUMENS
<b>280</b>
RUN TIME
<b>12h</b>

SAFETY CERTIFIED



# LARGE LIGHTS


Colossal performance with lightweight designs. Features like full time battery level indication, articulating light head and multiple light modes keep you in control of the job. Pelican is also a leader of high performance lithium-ion technology in portable lighting.



## 9410L LED LANTERN



LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 8.75" (22.2 cm)  
 MODES // High / Low / Flashing  
 Full Time Battery Indicator



## 9415 LED LANTERN



LIGHT SOURCE // LED  
 BATTERIES // NiMH (included)  
 LENGTH // 8.75" (22.2cm)  
 MODES // High / Low / Flashing  
 Full Time Battery Indicator  
 CERTIFICATIONS // CI, D1



# TACTICAL LIGHTS

Pelican's tactical lights are field ready, built to withstand the hard knocks that come with the job. Each intense, focused beam provides downrange visibility and peripheral lighting aids in situational awareness.

## 7110

LIGHT SOURCE // LED  
 BATTERIES // 1 AA (included) or 1 CR123  
 LENGTH // 4.63" (11.8cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



NEW

LUMENS  
 RUN TIME  
**445**  
 UP TO  
**13h**

## 7600

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.19" (15.7cm)  
 MODES // High / Strobe / Medium / Low  
 LED COLORS // White / Red / Green  
 PROGRAMMABLE // 5 Selectable Programs



USB

LUMENS  
 RUN TIME  
**944**  
 UP TO  
**29h**

## 7110

LIGHT SOURCE // LED  
 BATTERIES // 1 AA (included) or 1 CR123  
 LENGTH // 4.63" (11.8cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



NEW

LUMENS  
 RUN TIME  
**445**  
 UP TO  
**13h**

## 7600

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.19" (15.7cm)  
 MODES // High / Strobe / Medium / Low  
 LED COLORS // White / Red / Green  
 PROGRAMMABLE // 5 Selectable Programs



USB

LUMENS  
 RUN TIME  
**944**  
 UP TO  
**29h**

## 7000

LIGHT SOURCE // LED  
 BATTERIES // 2 CR123 Lithium-Ion  
 LENGTH // 5.31" (13.5 cm)  
 MODES // High / Strobe / Medium / Low  
 Self Programmable



LUMENS  
 RUN TIME  
**774**  
 UP TO  
**13h**

## 2350

LIGHT SOURCE // LED  
 BATTERIES // 1 AA Alkaline (included)  
 LENGTH // 4.23" (10.7 cm)  
 MODES // High/ Strobe / Low



LUMENS  
 RUN TIME  
**178**  
 UP TO  
**21h**

## 7060

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 8.65" (22cm)  
 MODES // High / Strobe / Medium / Low  
 Self Programmable



LUMENS  
 RUN TIME  
**402**  
 UP TO  
**57h**

## 2360 LED

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.2" (15.7cm)  
 MODES // High/ Strobe/ Low



LUMENS  
 RUN TIME  
**375**  
 UP TO  
**13h**

## 7610

LIGHT SOURCE // LED  
 BATTERIES // 1 AA (included) or 2 CR123  
 LENGTH // 5.44" (13.8cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



LUMENS  
 RUN TIME  
**1018**  
 UP TO  
**33h**

NEW

## 7070R

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.88" (17.5cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Preset Selectable Programs / Customizable Programs (via Bluetooth™)



NEW

LUMENS  
 RUN TIME  
**1219**  
 UP TO  
**32h**

Bluetooth



WIRELESS CHARGING

## 2370

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (included)  
 LENGTH // 6.43" (16.3cm)  
 MODES // High / Low / Red / Blue  
 LIGHT COLORS // White / Red / Blue



LUMENS  
 RUN TIME  
**358**  
 UP TO  
**11h**

## 7620

LIGHT SOURCE // LED  
 BATTERIES // 2 AA (included), 2 CR123 or 3 CR123  
 LENGTH // 6.75" (17.15cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



NEW

LUMENS  
 RUN TIME  
**1124**  
 UP TO  
**37h**

## PM6 3330

LIGHT SOURCE // LED  
 BATTERIES // 2 CR123 Lithium-Ion (included)  
 LENGTH // 5.27" (13.4cm)



LUMENS  
 RUN TIME  
**90**  
 UP TO  
**4h 45m**

## 7100

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 5.12" (13cm)  
 MODES // High / Strobe / Medium / Low  
 PROGRAMMABLE // 5 Selectable Programs



LUMENS  
 RUN TIME  
**695**  
 UP TO  
**9h 15m**

USB

## 8060

LIGHT SOURCE // LED  
 BATTERIES // NiMH (included)  
 LENGTH // 12.67" (32.2cm)  
 MODES // High / Strobe / Medium / Low  
 Flashing / Self Programmable



LUMENS  
 RUN TIME  
**803**  
 UP TO  
**69h**

# HEADLAMPS

With up to 500 lumens, revolutionary downcast lighting, USB charging and battery level indication, these headlamps are packed with features. Other options, including night vision friendly red illumination, interchangeable body colors and multiple settings, make these headlamps your best partner for the dark.

## HEADSUP LITE™ 2610

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 1.49" (3.8cm)  
 MODES // High / Low  
 CERTIFICATIONS // CI, D1



## HEADSUP LITE™ 2690

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.81" (7.1 cm)  
 CERTIFICATIONS // CI II III, D1



## 2720 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.48" (6.3 cm)  
 MODES // Variable Light Output / Spot to Flood / Red Night Vision Friendly LEDs




GESTURE  
ACTIVATION  
CONTROL

## 2740 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Red LED

■ ■ (Translucent Blue)



## 2745 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing  
 CERTIFICATIONS // CI, D1


■ ■



## 2750 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Red LED / Low Battery Warning

■ ■ (Photoluminescent)




### 2755 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Low Battery Warning  
 CERTIFICATIONS // CI, D1



### 2760 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Medium / Low / Downcast / Flashing / Red LED / Full-time Battery Level Indicator




### 2765 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 3 AAA Alkaline (included)  
 LENGTH // 2.25" (5.7 cm)  
 MODES // High / Low / Flashing / Downcast  
 CERTIFICATIONS // CI, D1




### 2780 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator



### 2780R HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast / Full-time Battery Level Indicator



### 2785 HEADLAMP

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 3.00" (7.6 cm)  
 MODES // High / Medium / Low / Flashing / Downcast  
 CERTIFICATIONS // CI D1



HEADLAMPS



## RIGHT ANGLE / ARTICULATING LIGHTS

Firefighters put everything on the line and the correct lighting tools are critical. Right angle (90°) and adjustable head flashlights often worn on turnout coats offer hands-free performance. With extreme peak beam intensity and smoke-cutting penetration, these lights will get you in and out of tough situations safely.

### 3310R-RA

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 8.27" (21cm)  
 MODES // Boost / High / Low



LUMENS  
 RUN TIME  
 UP TO  
**948**  
**50h**



### 3315R-RA

LIGHT SOURCE // LED  
 BATTERIES // Lithium-Ion (included)  
 LENGTH // 6.11" (15.5cm)  
 CERTIFICATIONS // CI, D1



LUMENS  
 RUN TIME  
 UP TO  
**132**  
**34h**



### 3410 / 3410M

LIGHT SOURCE // LED  
 BATTERIES // 3 AA (not included)  
 LENGTH // 7.44" (18.9cm)  
 MODES // High / Medium / Low  
 Spot / Flood / Both



3410M Includes  
 Magnetic Clip



LUMENS  
 RUN TIME  
 UP TO  
**653**  
**61h**

### 3415 / 3415M

LIGHT SOURCE // LED  
 BATTERIES // 3 AA (not included)  
 LENGTH // 7.44" (18.9cm)  
 MODES // High  
 Spot / Flood / Both  
 CERTIFICATIONS // CI II III, D1, IECEx ia



3415M Includes  
 Magnetic Clip



LUMENS  
 RUN TIME  
 UP TO  
**336**  
**14h**



### LITTLE ED™ 3610PL PHOTOLUMINESCENT SHROUD

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 7.51" (19.1cm)  
 CERTIFICATIONS // CI II III, D1



LUMENS  
 RUN TIME  
 UP TO  
**183**  
**5h 45m**



### LITTLE ED™ 3660

LIGHT SOURCE // LED  
 BATTERIES // NiMH (included)  
 LENGTH // 7.51" (19.1cm)  
 CERTIFICATIONS // CI II, D2



LUMENS  
 RUN TIME  
 UP TO  
**183**  
**5h**



### LITTLE ED™ 3610

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (included)  
 LENGTH // 7.51" (19.1cm)  
 CERTIFICATIONS // CI II III, D1



LUMENS  
 RUN TIME  
 UP TO  
**183**  
**5h 45m**



### 3715

LIGHT SOURCE // LED  
 BATTERIES // 4 AA Alkaline (not included)  
 LENGTH // 5.36" (13.6cm)  
 MODES // High / Low / Flashing / Downcast  
 CERTIFICATIONS // CI, D1



LUMENS  
 RUN TIME  
 UP TO  
**233**  
**31h**



RIGHT ANGLE LIGHTS





**3715PL**  
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
4 AA Alkaline (not included)  
LENGTH //  
5.36" (13.6cm)  
MODES //  
High / Low / Flashing / Downcast  
CERTIFICATIONS //  
C1, D1



**3765**

LIGHT SOURCE //  
LED  
BATTERIES //  
NiMH (included)  
LENGTH //  
5.36" (13.6cm)  
MODES //  
High / Low / Flashing / Downcast  
CERTIFICATIONS //  
C1, D1



**3765 PL**  
PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
NiMH (included)  
LENGTH //  
5.36" (13.6cm)  
MODES //  
High / Low / Flashing / Downcast  
CERTIFICATIONS //  
C1, D1



# DIVE LIGHTS

Whether you'll be exploring underwater caves and crevices during daylight hours or enjoying the exhilarating adventure of a night dive, Pelican's Nemo™ line of dive lights will fill your needs. Designed to support depths up to 100 meters and built Pelican tough, you'll appreciate the reliability these underwater tools provide.



## NEMO™ 1960N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
2 AAA Alkaline (included)  
LENGTH //  
5.48" (13.9cm)  
SUBMERSIBLE //  
100 Meters



LUMENS  
**34**  
RUN TIME  
**3h 30m**



## NEMO™ 2010N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
3 C Alkaline (not included)  
LENGTH //  
8.11" (20.6cm)  
SUBMERSIBLE //  
100 Meters



LUMENS  
**161**  
RUN TIME  
**22h**




## NEMO™ 2410N PHOTOLUMINESCENT SHROUD

LIGHT SOURCE //  
LED  
BATTERIES //  
4 AA Alkaline (included)  
LENGTH //  
7" (17.8cm)  
SUBMERSIBLE //  
100 Meters



LUMENS  
**183**  
RUN TIME  
**5h 45m**

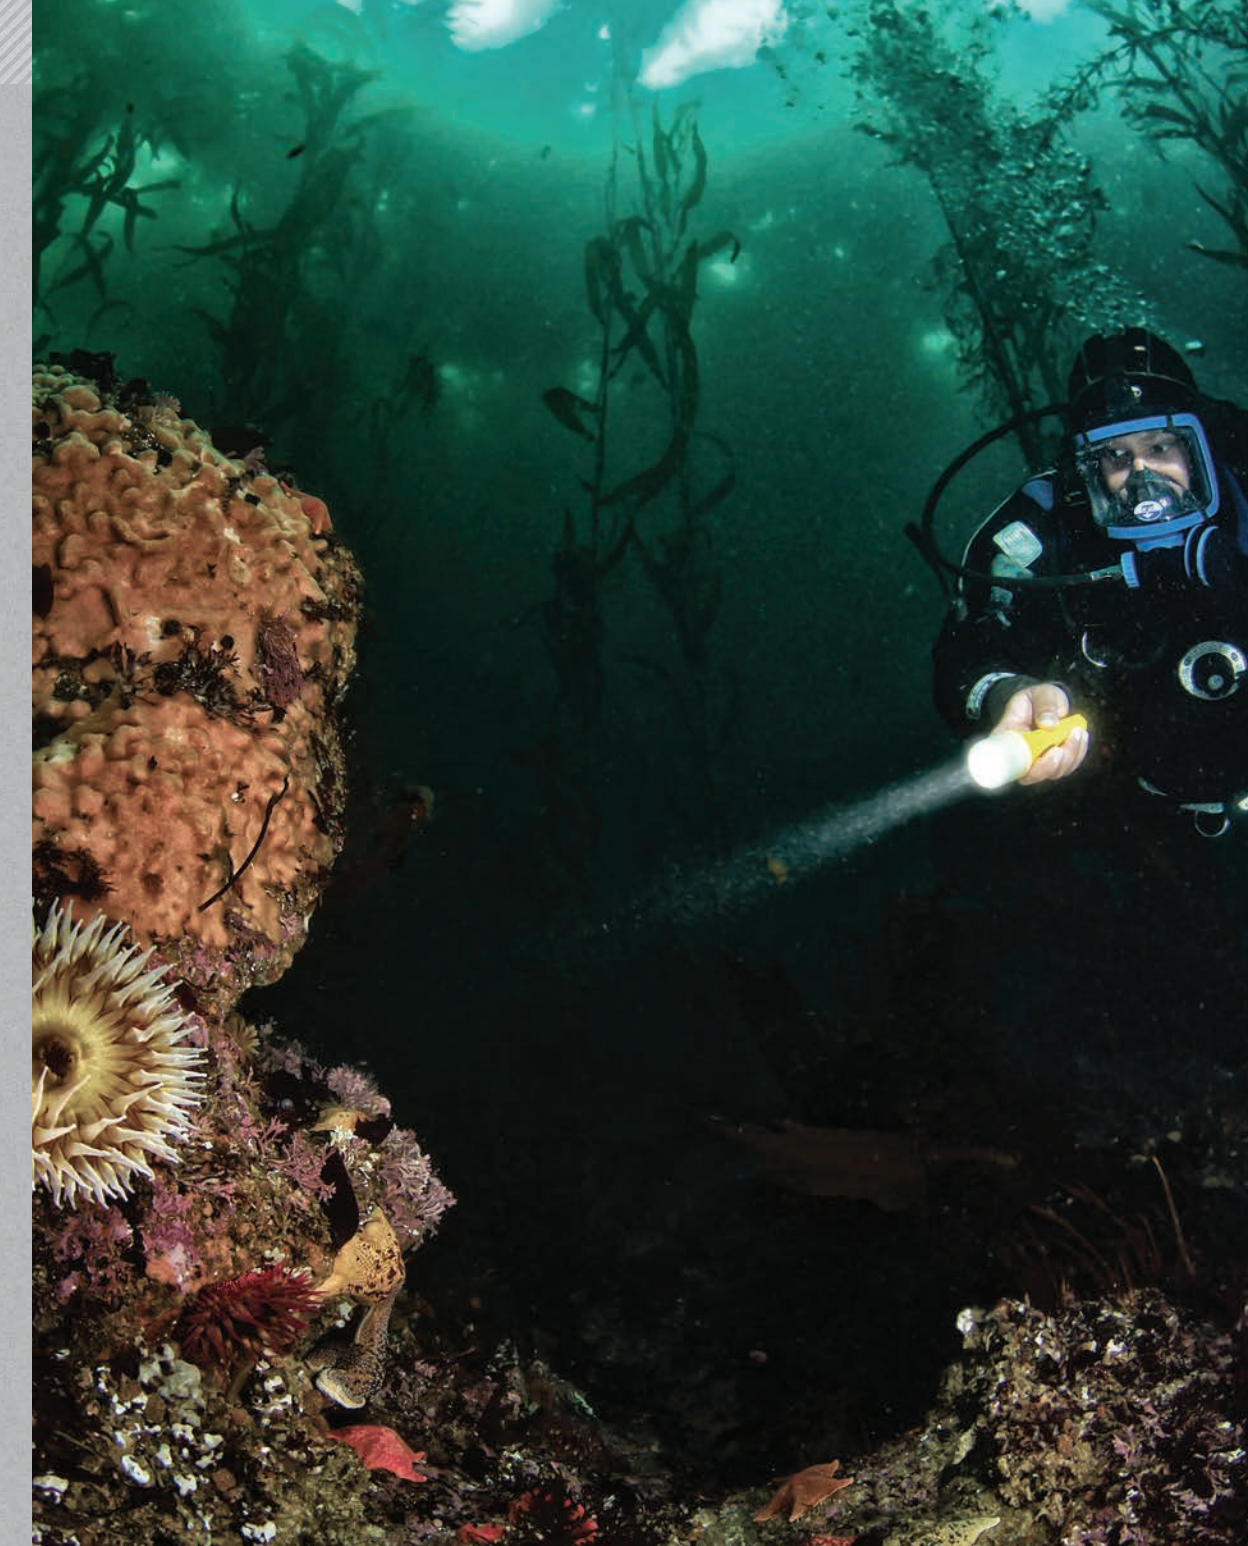

# SPECIALTY LIGHTS

Whether directing fighter jets on the deck of aircraft carrier or protecting our troops with friend-or-foe infrared beacons, Pelican manufactures quality lighting tools for many unique military applications. Also available, magnetically secured flexible neck designs for mechanics and red LED flashers that are helpful in keeping workers safe.

## MINI FLASHER™ 2130

LIGHT SOURCE // LED  
 BATTERIES // 2 L1154 Alkaline (included)  
 LENGTH // 1.73" (4.4 cm)



## MINI FLASHER™ 2130IR

LIGHT SOURCE // LED (infrared)  
 BATTERIES // 2 L1154 Alkaline (included)  
 LENGTH // 1.73" (4.4 cm)



## 2365 FLEX NECK

LIGHT SOURCE // LED  
 BATTERIES // 2 AA Alkaline (not included)  
 LENGTH // 21.92" (55.7cm)



LUMENS  
**65**  
 RUN TIME  
**7h**



## 2490 (WITH TRAFFIC WAND)

LIGHT SOURCE // ReCoil™ LED  
 BATTERIES // 4 AA Alkaline (not included)  
 LENGTH // 12.5" (31.7 cm)



LUMENS  
**64**  
 RUN TIME  
**12h**



# LIGHT WEAPON MOUNTING SYSTEMS



CAT. NO. 631

**FOREGRIP MOUNT**  
Fits Pelican Light 7000.



CAT. NO. 7006

**REMOTE PRESSURE SWITCH**  
Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip. Fits Pelican Light 7000 (Cat. No. 7006).  
COLOR: Black // WT.: 2.0 oz.



**NEW PELICAN™ HELMET HOLDERS BY BLACK JACK™ FLASHLIGHT HOLDER**  
Tough aluminum mounts are built to hold the flashlight under the brim of the helmet, parallel to the line of sight of the user.  
Cat. No. #780, 781, 782



**NEW PELICAN™ HEAD STRAP RETAINERS BY BLACK JACK™**  
Set of four high temperature composite clips that utilize a 3M™ adhesive and will attach to any helmet.  
CAT. No. 783

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

	CAT. NO. 2327 Nylon Holster	CAT. NO. 2357/2367 Nylon Holster	CAT. NO. 2377 Nylon Holster	CAT. NO. 2407 Nylon Holster	CAT. NO. 7070RWH Nylon Holster / Wand Kit	Cat. NO. 7075 Basketweave Leather Holster	CAT. NO. 7077 Plain Leather Holster	Cat. NO. 7078 Nylon Holster	CAT. NO. 7106 Nylon Holster	CAT. NO. 7108 Composite Holster	CAT. NO. 7116 Nylon Holster	CAT. NO. 7606 Nylon Holster	CAT. NO. 7607 Nylon Holster / Wand Kit	CAT. NO. 7608 Composite Holster	CAT. NO. 7616 Nylon Holster	CAT. NO. 7617 Nylon Holster / Wand Kit	CAT. NO. 7627 Nylon Holster / Wand Kit	CAT. NO. 8057 Nylon Holster
<b>HOLSTERS</b>																		
CAT. NO.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
2330	•																	
2360		•																
2370			•															
2410				•														
2410PL				•														
2460				•														
7000	•																	
7060						•	•	•										
7070R					•	•	•	•										
7100									•	•								
7110										•	•							
7600												•	•					
7610													•	•	•			
7620														•		•	•	
8050																		•

	CAT. NO. 700	CAT. NO. 750	CAT. NO. 770	CAT. NO. 780 FULL HOUSE	CAT. NO. 781 ACE	CAT. NO. 782 ALL IN	CAT. NO. 783 DOUBLE DOWN
<b>HELMET HOLDERS</b>							
CAT. NO.							
2330			•		•		
2350					•		
2360					•		
2370					•		
2410/PL	•	•	•	•			
2460	•	•	•	•			
3310			•			•	
3315/PL			•			•	
3325						•	
3330			•		•		
7000					•		
All Headlamps							•

LIGHT MOUNTING | HOLSTER | HOLDER STYLES

# SPECIFICATIONS

CAT. NO.	BATTERIES (included)	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	LUMENS	RUN TIME	BEAM SPREAD	NUMBER OF LED <sup>s</sup>	LAMP HEADS	CERTIFICATIONS	COLORS
<b>9430</b>	Rechargeable, Sealed Lead Acid	22.65 lbs. (10.27)	32.28" (82) <sup>A</sup>	3000*, 1500***	8h*, 15h***	125°	6	1	N/A	■ ■
<b>9430SL</b>	Rechargeable, Sealed Lead Acid	22.05 lbs. (10)	32.28" (82) <sup>A</sup>	2000*, 1000***	8h*, 15h***	10°	24	1	N/A	■
<b>9440</b>	Rechargeable Lithium ion	16.09 lbs. (7.3)	85" (215.8) <sup>A</sup>	5300*, 2800** 1400***	1h 30m*, 4h** 8h***	125°	12	1	N/A	■ ■
<b>9455</b>	Rechargeable NiMH	16 lbs. (7.3)	31.50" (80) <sup>A</sup>	1600*, 800***	5h*, 10h***	125°	10	1	CI D1, IECEx ia, ATEX Zone 0	■ ■
<b>9460</b>	Rechargeable, Sealed Lead Acid	61 lbs. (27.7)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
<b>9460M</b>	Rechargeable, Sealed Lead Acid	64 lbs. (24.95)	79.50" (201.9) <sup>A</sup>	12,000 (variable)	3h*, 24h***	120°	10 per head	2	N/A	■ ■
<b>9470</b>	Rechargeable, Sealed Lead Acid	105 lbs. (47.6)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
<b>9470M</b>	Rechargeable, Sealed Lead Acid	108lbs. (49)	82.00" (208.3) <sup>A</sup>	24,000 (variable)	2h 45m*, 24h***	120°	10 per head	4	N/A	■ ■
<b>9480</b>	Rechargeable, Sealed Lead Acid	27.5 lbs. (12.47)	23.75" (60.3) <sup>A</sup>	4000*, 3000** 1000***	6h*, 8h** 28h***	125°	8	1	N/A	■ ■
<b>9490</b>	Rechargeable, Sealed Lead Acid	32 lbs. (14.51)	72" (182.8) <sup>A</sup>	6000 (variable)	3h 30m*, 12h** 24h***	125°	10	1	N/A	■ ■
<b>9500</b>	N/A	29.8 lbs. (13.52)	20.62" (52.4)	6000 (white LED) 1200 (red LED)	constant	210° (diffused)	36	3	N/A	■
<b>9600</b>	N/A	9.04 lbs. (4.1)	120" (304.8) <sup>A</sup>	3000	constant	125°	14	1	N/A	■

CAT. NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
<b>5000</b>	2 AAA Alkaline (included)	2.4 oz. (0.07)	5.59" (14.2)	202*, 21***	1h 15m*, 7h***	69*, 21***	1176*, 111***	IPX8	N/A	■
<b>5010</b>	2 AA Alkaline (included)	5.1 oz. (0.15)	6.26" (15.9)	392*, 22***	2h 15m*, 26h***	184*, 43***	8507*, 452***	IPX8	N/A	■
<b>5020</b>	4 AAA Alkaline (included)	7.3 oz. (0.21)	5.87" (14.9)	586*, 217**, 20***	1h*, 2h 30m**, 27h***	250*, 147**, 44***	15672*, 5368**, 480***	IPX8	N/A	■
<b>5050R</b>	Rechargeable Lithium-Ion (included)	5.8 oz. (0.16)	6.16" (15.6)	883 <sup>B</sup> , 393*, 21***	N/A <sup>B</sup> , 2h 30m*, 40h***	201 <sup>B</sup> , 134*, 30***	10093 <sup>B</sup> , 4488*, 224***	IPX8	N/A	■
<b>2750CC</b>	3 AAA Alkaline (included)	3.4 oz. (0.10)	2.25" (5.7)	183*, 50***	2h 30m*, 11h***	63*, 31***	989*, 240***	IPX4	N/A	■ (photoluminescent)
<b>2755CC</b>	3 AAA Alkaline (included)	3.4 oz. (0.10)	2.25" (5.7)	72*, 36***	6h 45m*, 15h***	50*, 35***	632*, 302***	IP54	CI D1, IECEx ia	■
<b>3310CC</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	283*, 31***	8h*, 175h***	169*, 50***	7150*, 625***	IPX8	N/A	■ (photoluminescent)
<b>3315CC</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	130	16h 30m	110	3042	IP67	CI II III, D1, IECEx ia	■
<b>3410MCC</b>	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	484*, 64**, 17***	4h*, 20h**, 67h***	155*, 56**, 29***	5991*, 796**, 205***	IPX8	N/A	■ (photoluminescent)
<b>3415MCC</b>	3 AA Alkaline (not included)	9.0 oz. (0.26 gr)	7.44" (18.9)	258 <sup>S/F</sup> , 127 <sup>F</sup> , 144 <sup>S</sup>	5h <sup>S/F</sup> , 13h <sup>F</sup> , 13h <sup>S</sup>	111 <sup>S/F</sup> , 30 <sup>F</sup> , 109 <sup>S</sup>	3109 <sup>S/F</sup> , 231 <sup>F</sup> , 2998 <sup>S</sup>	IPX8	CI II III, D1, IECEx ia	■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>A</sup> Extended Height | <sup>B</sup> Boost | <sup>S</sup> Spot | <sup>F</sup> Flood | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)

CAT. NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
<b>1810</b>	4 LR 41 Alkaline (included)	0.5 oz. (0.01)	1.5" (3.8)	16	8h 30m	23	137	IPX4	N/A	■ ■ ■
<b>1830</b>	3 AAAA Alkaline (included)	1.2 oz. (0.03)	6.2" (15.7)	5	32h	13	44	IPX4	CI, D1	■ ■
<b>1910</b>	1 AAA Alkaline (included)	1.5 oz. (0.04)	3.8" (9.6)	106*, 21***	2h 30m*, 4h***	55*, 24***	765*, 140***	IPX7	N/A	■ ■ ■
<b>1920</b>	2 AAA Alkaline (included)	2.2 oz. (0.06)	5.5" (14)	224*, 22***	2h 15m*, 8h 45m***	81*, 25***	1640*, 152***	IPX7	N/A	■ ■ ■
<b>1930</b>	4 LR 44 Alkaline (included)	0.9 oz. (0.03)	2.64" (6.7)	12	4h 15m	17	70	IPX4	CI, D1/CII, D2	■ ■
<b>1965</b>	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	87	2h 15m	41	429	IPX7	CI II III, D1	■ ■
<b>1970</b>	2 AAA Alkaline (included)	1.8 oz. (0.05)	5.75" (14.6)	139	4h 15m	29	205	IPX4	N/A	■
<b>1975</b>	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.75" (14.6)	117	2h 15m	24	141	IPX4	CI II III, D1	■
<b>2220</b>	2 CR2032 Lithium (included)	1 oz. (0.03)	3.5" (8.9)	9	34h	12	38	IPX4	CI, D1	■ ■ ■
<b>2010</b>	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■ ■
<b>2010PL</b>	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	160	6398	IPX7	CI II III, D1	■
<b>2410</b>	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■ ■
<b>2410PL</b>	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX7	CI II III, D1	■
<b>2460</b>	Rechargeable NiMH (included)	7.8 oz. (0.22)	7" (17.8)	183	5h	179	8050	IPX7	CI II, D2	■ ■
<b>3310PL</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
<b>3310ELS</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	378*, 39***	8h*, 202h***	196*, 62***	9580*, 961***	IPX8	N/A	■ (photoluminescent)
<b>3310R</b>	Rechargeable Lithium-Ion (included)	5.4 (0.15)	6.11" (15.5)	1067 <sup>B</sup> , 403*, 21***	N/A <sup>B</sup> , 2h 30m*, 50h***	243 <sup>B</sup> , 149*, 34***	14808 <sup>B</sup> , 5591*, 281***	IPX8	N/A	■ ■
<b>3315</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■ ■
<b>3315R</b>	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	CI, D1	■ ■
<b>3315PL</b>	3 AA Alkaline (included)	6.2 oz. (0.18)	6.14" (15.6)	160	19h	144	5153	IPX7	CI II III, D1	■ (photoluminescent)
<b>3325</b>	3 AA Alkaline (included)	6.1 oz. (0.17)	6.06" (15.4)	162	16h	144	5215	IPX7	CI, D1	■
<b>3345</b>	3 AA Alkaline (not included)	7.5 oz. (0.21)	7.25" (18.4)	280 <sup>S/F</sup> , 117 <sup>F</sup> , 219 <sup>S</sup>	5h <sup>S/F</sup> , 13h 15m <sup>F</sup> , 9h <sup>S</sup>	126 <sup>S/F</sup> , 16 <sup>F</sup> , 137 <sup>S</sup>	3990 <sup>S/F</sup> , 60 <sup>F</sup> , 4724 <sup>S</sup>	IPX7	CI II III, D1	■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>B</sup> Boost | <sup>S</sup> Spot | <sup>F</sup> Flood | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
LARGE LIGHTS	9410L	Rechargeable Lithium-Ion (included)	44.7 oz. (1.27)	8.75" (22.2)	2207*, 463***	3h 15m*, 11h***	453*, 207***	51,304*, 10,710***	IPX4	N/A	■ ■
	9415	Rechargeable NiMH (included)	49.3 oz. (1.4)	8.75" (22.2)	413*, 159***	4h 30m*, 12h***	325*, 201***	26352*, 10076***	IPX4	CI, D1	■
	2350	1 AA Alkaline (included)	3.4 oz. (0.1)	4.23" (10.7)	178*, 15***	2h 15m*, 21h***	130*, 37***	4196*, 345***	IPX7	N/A	■
	2360	2 AA Alkaline (included)	5.4 oz. (0.15)	6.2" (15.7)	375*, 29***	2h 30m*, 13h***	192*, 53***	9187*, 705***	IPX8	N/A	■
	2370	2 AA Alkaline (included)	6.5 oz. (0.18)	6.43" (16.3)	358*, 35***	2h*, 11h***	158*, 52***	9000*, 823***	IPX7	N/A	■
	3330	2 CR123 Lithium (included)	3.45 oz. (0.1)	5.27" (13.4)	90	4h 45m	88	1959	IPX4	N/A	■ ■
	7000	2 CR123 Lithium (included)	5.6 oz. (0.16)	5.31" (13.5)	774*, 457** , 99***	1h 15m*, 1h 45m**, 13h***	246*, 176** , 83***	14768*, 7712** , 1738***	IPX7	N/A	■
	7060	Rechargeable Lithium-Ion (included)	10.4 oz. (0.29)	8.65" (22)	402*, 162** , 18***	3h 30m*, 12h** , 57h***	210*, 131** , 45***	11078*, 4312** , 500***	IPX4	N/A	■
	7070R	Rechargeable Lithium-Ion (included)	7.9 oz. (0.22)	6.88" (17.5)	1219*, 626** , 32***	2h 15m*, 4h 15m** , 32h***	235*, 168** , 40***	13872*, 7066** , 400***	IPX8	N/A	■
	7100	Rechargeable Lithium-Ion (included)	4.4 oz. (0.13)	5.12" (13)	695*, 348** , 33***	1h 15m*, 1h 30m** , 9h 15m***	194*, 130** , 38***	9314*, 4247** , 358***	IPX8	N/A	■
TACTICAL LIGHTS	7110	1 AA Alkaline (included) or 1 CR123	4.1 oz. (0.12)	4.63" (11.8)	445*, 214** , 23***	1h*, 1h 30m** , 13h***	93*, 62** , 20***	6053*, 2695** , 288***	IPX8	N/A	■
	7600	Rechargeable Lithium-Ion (included)	7.1 oz. (0.20)	6.19" (15.7)	944*, 479** , 37***	3h 15m*, 4h 30m** , 29h***	225*, 157** , 44***	12693*, 6172** , 480***	IPX8	N/A	■
	7610	1 AA Alkaline (included) or 2 CR123	5.5 oz. (0.16)	5.44" (13.8)	1018*, 531** , 25***	1h 30m*, 2h** , 33h***	227*, 151** , 33***	12856*, 5674** , 273***	IPX8	N/A	■
	7620	2 AA Alkaline (included) or 3 CR123	6.9 oz. (0.20)	6.75" (17.1)	1124*, 528** , 28***	2h*, 3h** , 37h***	243*, 155** , 35***	14824*, 5974** , 315***	IPX8	N/A	■
	8060	Rechargeable NiMH (included)	23.2 oz. (0.66)	12.67" (32.2)	803*, 447** , 25***	2h 30m*, 4h** , 69h***	359*, 265** , 62***	32252*, 17492** , 958***	IPX4	N/A	■
	2610	3 AAA Alkaline (included)	3.2 oz. (0.09)	1.49" (3.8)	30*, 14***	19h*, 47h***	28*, 19***	194*, 91***	IPX4	CI, D1	■
	2690	3 AAA Alkaline (included)	4.1 oz. (0.12)	2.81" (7.1)	74	11h	92	2124cd	IPX7	CI II III, D1	■
	2720	3 AAA Alkaline (included)	3.8 oz. (0.11)	2.48" (6.3)	200*, 12***	3h*, 103h***	82*, 20***	1684*, 103***	IPX4	N/A	■
	2740	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	66*, 36***	7h 15m*, 21h***	22*, 16***	122*, 68***	IPX4	N/A	■ ■ (translucent)
	2745	3 AAA Alkaline (included)	3.3 oz. (0.09)	2.25" (5.7)	33*, 17***	20h*, 40h***	35* , 25***	309*, 155***	IPX4	CI, D1	■ ■
HEAD LAMPS	2750	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	193*, 63***	3h*, 11h***	98*, 58***	1250* , 591***	IPX4	N/A	■ ■ (photoluminescent)
	2755	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	72*, 34***	6h*, 15***	57*, 40***	807* , 404***	IPX4	CI, D1	■ ■

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)

	CAT NO.	BATTERIES	WEIGHT W/ BATTERIES (KG)	LENGTH (CM)	ANSI LIGHT OUTPUT	ANSI RUN TIME	ANSI BEAM DISTANCE (meters)	ANSI PEAK BEAM INTENSITY (candela)	ANSI IPX RATING	CERTIFICATIONS	COLORS
HEAD LAMPS	2760	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	204*, 141** , 95*** , 42****	2h*, 3h 15m** , 5h*** , 11h****	111*, 80** , 59*** , 19****	3065*, 1606** , 861*** , 88****	IPX4	N/A	■ ■ (translucent)
	2765	3 AAA Alkaline (included)	3.4 oz. (0.1)	2.25" (5.7)	105*, 104** , 65*** , 33****	4h 15m*, 4h** , 6h 15m*** , 9h****	107*, 93** , 63*** , 9****	2876*, 2163** , 978*** , 18****	IPX4	CI, D1	■ ■
	2780	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	430*, 203** , 53***	1h 30m*, 3h** , 12h***	127*, 81** , 27***	3868*, 1625** , 425***	IPX7	N/A	■ ■ (photoluminescent)
	2780R	Rechargeable Lithium-Ion (included)	250 oz. (7.09)	3" (7.6)	558*, 213** , 95***	2h*, 3h** , 7h 30m***	127*, 78** , 53***	4060*, 1540** , 695***	IPX7	N/A	■ ■ (photoluminescent)
	2785	4 AA Alkaline (included)	250 oz. (7.09)	3" (7.6)	226*, 103** , 33***	5h 45m*, 20h** , 66h***	111*, 74** , 41***	3058*, 1372** , 417***	IPX7	CI, D1	■ ■
RIGHT ANGLE LIGHTS	3310R-RA	Rechargeable Lithium-Ion (included)	5.4 (0.15)	8.27" (21)	948 <sup>B</sup> , 385*, 20***	N/A <sup>S</sup> , 2h 30m*, 50h***	236 <sup>B</sup> , 147*, 32***	13944 <sup>B</sup> , 5424* , 267***	IPX8	N/A	■
	3315R-RA	Rechargeable Lithium-Ion (included)	6.2 oz. (0.18)	6.11" (15.5)	132*, 15***	5h*, 34h***	108*, 35***	2931*, 308***	IPX7	N/A	■
	3410 / 3410M	3 AA Alkaline (not included)	9.2 oz. (0.26)	7.44" (18.9)	653*, 97** , 25***	5h*, 19h* , 61h*	184*, 67** , 34***	8504*, 1129** , 292***	IPX8	N/A	■ (photoluminescent)
	3415 / 3415M	3 AA Alkaline (not included)	9.0 oz. (0.25)	7.44" (18.9)	336 <sup>S/F</sup> , 177 <sup>F</sup> , 186 <sup>S</sup>	6h <sup>S/F</sup> , 15h <sup>F</sup> , 14h <sup>S</sup>	133 <sup>S/F</sup> , 37 <sup>F</sup> , 135 <sup>S</sup>	4418 <sup>S/F</sup> , 336 <sup>F</sup> , 4544 <sup>S</sup>	IPX8	CI II III, D1	■
	3610	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■ ■
	3610PL	4 AA Alkaline (included)	10.5 oz. (0.3)	7.51" (19.1)	183	5h 45m	184	8480	IPX7	CI II III, D1	■
	3660	Rechargeable 4 AA NiMH (included)	10.56 oz. (0.3)	7.51" (19.1)	183	5h	153	5828	IPX7	CI II, D2	■ ■
	3715	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113*** , 31****	4h*, 7h*** , 31h****	293*, 187*** , 30****	21440*, 8775*** , 220****	IPX4	CI, D1	■ ■
	3715PL	4 AA Alkaline (not included)	14.4 oz. (0.41)	5.36" (13.6)	233*, 113*** , 31****	4h*, 7h*** , 31h****	293*, 187*** , 30****	21440*, 8775*** , 220****	IPX4	CI, D1	■
	3765	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113*** , 32****	3h*, 6h 30m*** , 14h****	301*, 193*** , 28****	22720*, 9354*** , 192****	IPX4	CI, D1	■ ■
DIVE LIGHTS	3765PL	Rechargeable NiMH (included)	14.6 oz. (0.41)	5.36" (13.6)	237*, 113*** , 32****	3h*, 6h 30m*** , 14h****	301*, 193*** , 28****	22720*, 9354*** , 192****	IPX4	CI, D1	■
	1960N	2 AAA Alkaline (included)	1.9 oz. (0.05)	5.48" (13.9)	34	3h 30m	42	450	IPX8	N/A	■ ■ ■
	2010N	3 C Alkaline (not included)	13.4 oz. (0.38)	8.11" (20.6)	161	22h	260	6398	IPX8	N/A	■ ■ ■
	2410N	4 AA Alkaline (included)	7.3 oz. (0.21)	7" (17.8)	183	5h 45m	184	8480	IPX8	N/A	■ ■ ■
	2130	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	4.7 (non ANSI)	130h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2130IR	2 L1154 Alkaline (included)	0.5 oz. (0.01)	1.73" (4.4)	N/A	65h (non ANSI)	N/A	N/A	IPX7	N/A	■
	2365	2 AA Alkaline (not included)	9.3 oz. (0.26)	21.92" (55.7)	65	7h	81	1644	IPX4	N/A	■
	2490	4 AA Alkaline (not included)	8.2 oz. (0.23)	12.5" (31.7)	64	12h	118	3459	IPX7	N/A	□

\*High | \*\*Medium | \*\*\*Low | \*\*\*\*Downcast | <sup>B</sup> Boost | <sup>S</sup> Spot | <sup>F</sup> Flood | Additional approvals may apply. For details go to [www.pelican.com](http://www.pelican.com)

# CUSTOM LABELS

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable inks and foils in our screening, hot tipping, embossing, and molding programs. Laser etching is also available for many of the metal bodied lights



### GRAPHIC DESIGN STUDIO

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.




### HOT STAMPING

Our hot stamping department is equipped with the latest technology in custom imprinting. Minimum quantities apply.



### LASER ETCHING

Available only on metal bodied lights.

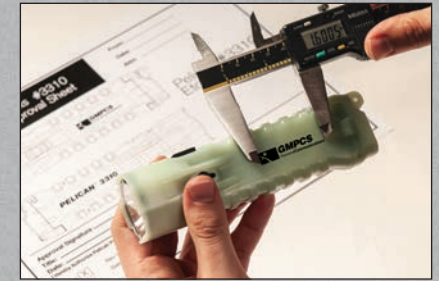

### 100% ACCURACY

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.