




FULCRUM ESCAPE BELT

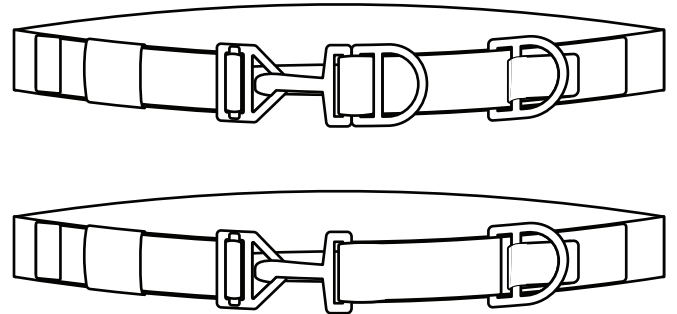


⚠ WARNINGS

- FAILURE TO COMPLY WITH INSTRUCTIONS OR IMPROPER USE OF THIS EQUIPMENT MAY RESULT IN SERIOUS INJURY OR DEATH.
- THIS EQUIPMENT HAS BEEN DESIGNED AND MANUFACTURED FOR USE BY EXPERIENCED PROFESSIONALS ONLY.
- DO NOT ATTEMPT TO USE THIS EQUIPMENT WITHOUT PROPER TRAINING.
- MANUFACTURER'S INSTRUCTIONS SHALL BE PROVIDED TO THE USER.
- THOROUGHLY READ AND UNDERSTAND ALL LABELS AND INSTRUCTIONS BEFORE USE.
- USE, INSPECT AND REPAIR ONLY IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
- THE USER SHALL HAVE A RESCUE PLAN AND A MEANS TO IMPLEMENT IT WHEN USING THIS EQUIPMENT.
- ASSURE THAT ANY COMBINATION OF COMPONENTS OR SUBSYSTEMS, OR BOTH, DO NOT INTERFERE WITH THE SAFE FUNCTION OF EACH OTHER.
- DO NOT EXPOSE EQUIPMENT TO CHEMICALS WHICH ARE HARMFUL TO KEVLAR BRAND FIBERS. IF IN DOUBT, CONTACT THE MANUFACTURER.
- AVOID CONTACT WITH SHARP EDGES OR ABRASIVE SURFACES.



CMC Rescue, Inc.
6740 Cortona Drive
Goleta, CA 93117, USA
805-562-9120 / 800-235-5741
cmcpro.com

ISO 9001 Certified
© CMC Rescue, Inc. All rights reserved
CMC and  are registered marks of CMC Rescue Inc.
Control No.: 204AIN01_Rev00



MEETS THE BELT REQUIREMENTS OF NFPA 1983, INCORPORATED IN THE 2022 EDITION OF NFPA 2500, AND THE OPTIONAL FLAME RESISTANCE REQUIREMENTS OF NFPA 1983, TYPE ESCAPE.

USER INFORMATION

User Information shall be provided to the user of the product. NFPA 2500 recommends separating the User Information from the equipment and retaining the information in a permanent record. The standard also recommends making a copy of the User Information to keep with the equipment and that the information should be referred to before and after each use.

Additional information regarding life safety equipment can be found in NFPA 1500, Standard on Fire Department Occupational Safety, Health, and Wellness Program, and NFPA 1858 and NFPA 1983, incorporated into the 2022 Edition of NFPA 2500, Standard for Operations and Training for Technical Search and Rescue Incidents and Life Safety Rope and Equipment for Emergency Services.

INSPECTION

Inspect the equipment according to your department's policy for inspecting life safety equipment. Inspect the equipment prior to entry into service, before and after each use, and at least once every 12 months. The equipment should be thoroughly inspected by an inspector that meets your department's training standard for inspection of life safety equipment. Keep a record of the date, person performing the inspection, results, date of first use, name of users, and any other pertinent information necessary to accurately track the equipment's usage history in the equipment log or on a tag that attaches to the equipment. Each user should be trained in equipment inspection and should inspect the equipment before each use.

When inspecting equipment, check for cuts, worn or frayed areas, broken fibers, soft or hard spots, discoloration, or melted fibers. Check the stitching for pulled threads, abrasion, or breaks. Check the hardware for damage, sharp edges, and signs of improper operation. If any of the above is noted, or if the equipment has been subjected to shock loads, fall loads, or abuse other than normal use, remove the equipment from service and destroy it. If there is any doubt about the serviceability of the equipment, remove the equipment from service and destroy it.

This equipment has a lifespan of 10 years from the date of manufacture shown on the product label. Retiring equipment from service is also a function of the operating conditions, level of use, and environmental conditions. Any concerns about its safe use is cause for retirement.

INSTRUCTIONS FOR USE

Component key:

- A. Snap hook
- B. V-ring adjuster
- C. Waist web keeper
- D. Sliding D-ring & keeper
- E. Fixed D-ring

PUTTING ON THE BELT

Don the Escape Belt by securing the snap hook over the V-ring around the user's waist. Tighten the waist by pulling the webbing tail backward through the adjuster buckle until the belt fits snugly but not uncomfortably. Slide excess tail through the elastic keeper to prevent belt loosening.

The sliding D-ring is intended as the primary load bearing attachment point for the LEVR™ Escape System, and can be secured by wrapping the accompanying Velcro keeper around the straight bar in the D-ring and back to the belt. The keeper will detach in a bailout scenario.

If present, the fixed D-ring is an additional load bearing attachment point.

To prevent carabiner rollout, use only locking gates. This belt should only be used for temporary suspension during emergency rappel / escape scenarios. This belt is not intended to provide the same support or safety as a life safety harness.

CARRYING, MAINTENANCE & STORAGE

During use, carrying, and storage, keep the equipment away from acids, alkalis, exhaust emissions, rust, and strong chemicals. Carry the equipment in a manner that protects it from cuts or abrasion. Store in a cool, dry location. Do not store where the equipment may be exposed to moist air, particularly where dissimilar metals are stored together.

Hand-wash soiled products in clean warm water. If necessary for effective cleaning, use an unscented mild liquid soap or a mild detergent that is safe for nylon, polyester, and Kevlar brand fibers. Avoid whitener, brightener, or bleach containing products. Do not use a pressure washer. Rinse thoroughly. Dry at room temperature between 10° C (50° F) and 30° C (86° F). Avoid direct sunlight, machine dryers, and direct heat or flame.

WARRANTY & REPAIRS

If your CMC product has a defect due to workmanship or materials, please contact CMC Customer Support at info@cmcpro.com for warranty information and service. CMC's warranty does not cover damages caused by improper care, improper use, alterations and modifications, accidental damage or the natural breakdown of material over extended use and time. All repair work shall be performed by the manufacturer. All other work or modifications void the warranty and releases CMC from all liability and responsibility as the manufacturer.

Legend



Imminent risk of serious injury or death.



Appropriate function or use.



Imminent risk of accident or injury.




Equipment incompatibility.

Carrying, Maintenance, Storage & Transport



MAX 30°C
(MAX 86°F)




MILD




MAX 30°C
(MAX 86°F)



Fulcrum Escape Belts

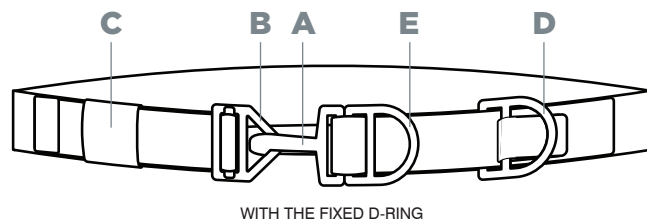

WITH THE FIXED D-RING

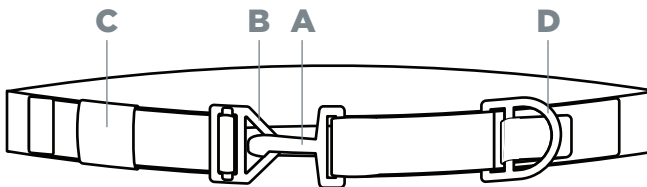

WITHOUT THE FIXED D-RING

SAMPLE INSPECTION AND MAINTENANCE LOG

The following sample log provides an example of the records that should be maintained by the purchaser or user of life safety equipment.

| EQUIPMENT INSPECTION AND MAINTENANCE LOG | | | |
|--|------------------------|-----------------------|------|
| Item _____ # _____ | | Date in Service _____ | |
| Brand/Model _____ | | Strength _____ | |
| Date | How Used or Maintained | Comments | Name |
| | | | |
| | | | |