




Technical specification sheet

HLB 53 | Lifting Bag

Specifications		
article number		350.321.031
model		HLB 53
max. working pressure	psi	174
short description		Lifting Bag
max. working pressure	bar	12
max. lifting capacity	lbf	116901
max. inflation height	in	16.2
thickness incl. profile	in	1.1
max. lifting capacity (12 bar/174 psi)	lbf	116901
max. lifting capacity (8 bar/116 psi)	lbf	78009
air content (12 bar/174 psi)	gal	182.8
air content (8 bar/116 psi)	gal	122
water content	gal	15.3
min. bursting pressure	psi	696
connection		ISO 6150 C
material		reinforced with 3 aramide inlays
weight, ready for use	lb	33.1
dimensions (AxBxC)	in	30.2 x 27.2 x 1.1
thread hole	threadsize	M6
temperature range	°F	-4 +131
EN 13731 compliant		yes

Standard supplied with	
• Integrated carrying handle with capacity indication	
• Slider pads to facilitate lifting bag placement	
• Inserts for optional lifting eyes	
• Flexible integrated dust cap on air inlet	

Accessories	
Slider Pads Set	151.000.180
Air Adapter Set AAS 12	151.000.223
T-splitter TS12	151.004.864
Air Control Set ACS 12	350.182.125
Lifting Eyes Set	350.182.129
Air Control set ACS 12 LP	358.582.018
Air Control set ACS 12 HP	358.582.019
Connection Piece	350.582.430

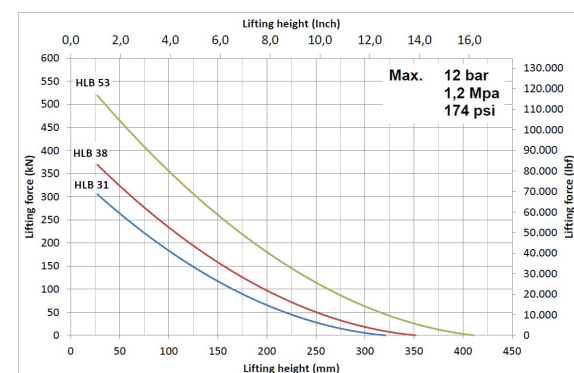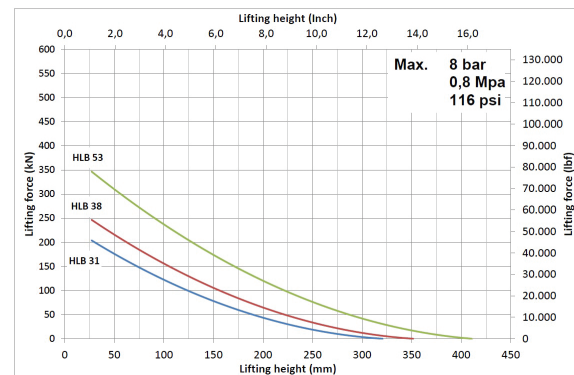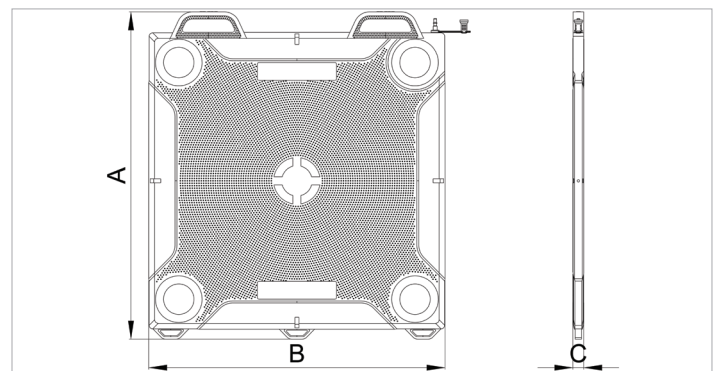

holmatro.com

© Holmatro 2025-11-25

While the greatest care has been devoted to the content, it is possible that the information in this printed matter is incorrect or incomplete. Holmatro B.V. and its affiliated companies (hereafter: Holmatro) cannot be held liable in any way for the consequences of activities undertaken on the basis of this printed matter. Values can vary within the manufacturer measurements. If you have any doubts about the correctness or completeness of the information, you shall contact Holmatro (T +31 (0)162-751480). Nothing from this printed matter can be copied and/or made public in any way without the explicit authorisation of Holmatro.