


When you need maximum illumination with a wide beam to light a large area, the E-Flood LiteBox HL provides a blast of 5,300 lumens.



6 LEDs and wide pattern parabolic reflectors produce a uniform flood pattern; optimized electronics provide regulated intensity
Three levels of lighting: <ul style="list-style-type: none"> – High for a super-bright flood beam: 5,300 lumens; 410m beam distance; runs 1.75 hours – Medium for an intense beam and longer run time: 2,500 lumens; 292m beam distance; runs 4.5 hours – Low for extended run time: 1,300 lumens; 215m beam distance; runs 10 hours Indefinite run time with 12V DC power cord
High impact ABS thermoplastic housing; rubberized impact bumper and lens ring, and reinforced D-rings
12.3 in. (31 cm); 10.4 lbs (4.7 kg)

Standard System – International safety orange; includes shoulder strap, AC and DC charge cords, and mounting rack
Vehicle Mount System – International safety orange; includes vehicle-mountable hard-wire rack and shoulder strap
Rack meets requirements of NFPA 1901-14.1.11.2 (2016) mounted in any position
Limited Lifetime Warranty Visit streamlight.com for full warranty information
#45662 - E-Flood LiteBox HL Standard System - 230V AC/12V DC - Orange #45663 - E-Flood LiteBox HL Standard System - 240V AC/12V DC - Orange #45661 - E-Flood LiteBox HL Standard System - 120V AC/12V DC - Orange #45665 - E-Flood LiteBox HL Vehicle Mount System - 12V DC - Orange #45660 - E-Flood LiteBox HL (without charger) - Orange

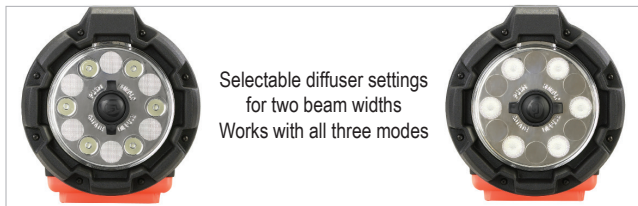