




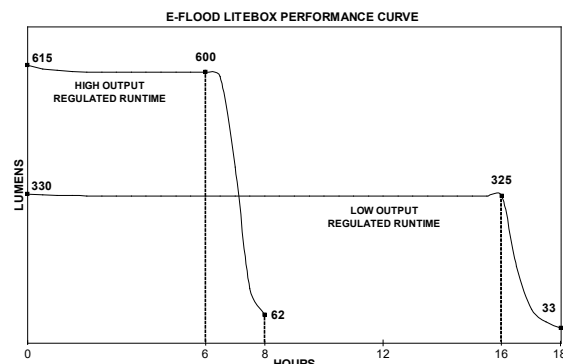


E-FLOOD® LITEBOX® // E-FLOOD® FIREBOX® RECHARGEABLE LANTERN

- DESCRIPTION:** The E-Flood® is an industrial-duty, rechargeable, portable lantern featuring the latest power LED technology for high brightness, long run time and high reliability. The E-Flood® uses six (6) LEDs and wide pattern reflectors to produce a uniform flood pattern. Jumper selectable high or low settings to allow for selection of more light output or more run time. Available in LiteBox®, FireBox® and Power Failure models.
- CASE MATERIAL:** High-impact ABS thermoplastic housing. Rubberized impact bumper, lens ring and cushioned-grip handle.
- DIMENSIONS:** Length: 11.5 in. (29.2 cm) Width: 5.1 in. (13.0 cm) Height: 7 in. (17.8 cm)
- WEIGHT:** 7.9 lbs (3.58 kg) with battery (included)
- LENS:** Unbreakable polycarbonate with scratch-resistant coating
- LIGHT SOURCE:** Six (6) white high-power LEDs, impervious to shock with a 50,000-hour lifetime.
- LIGHT OUTPUT:** See chart. Six (6) wide pattern parabolic reflectors produce a smooth flood pattern. Optimized electronics provide regulated intensity. Jumper selectable high or low settings.
- BATTERY:** Zero-maintenance 6V, 12Ah sealed lead acid is rechargeable up to 500 times
Red and green LEDs provide charge status
- RUN TIME:** See chart. Jumper selectable high or low settings.
- FEATURES:** IPX4-rated for weather-resistant operation
LED Solid State circuitry provides regulated light output throughout battery life
Serialized for positive identification
Fits existing Streamlight LiteBox® chargers
- MODELS:** Standard E-Flood® LiteBox® System: Push-button switch. Available in international safety orange or high-visibility yellow; includes shoulder strap, AC and DC charge cords and charge rack.
Vehicle Mount E-Flood® LiteBox® System: Push-button switch. Available in international safety orange or high-visibility yellow; includes shoulder strap and vehicle-mountable hard-wire rack.
Power Failure E-Flood® LiteBox® System: Push-button switch and “smart” power failure circuitry that automatically goes on when the power goes off. Available in international safety orange or beige; includes AC and DC charge cords and charge rack.
Standard E-Flood® FireBox® System: Toggle switch and two (2) user-programmable ultra-bright blue tail-light LEDs. Available in international safety orange or high-visibility yellow; includes shoulder strap, AC and DC charge cords and charge rack.
Vehicle Mount E-Flood® FireBox® System: Toggle switch and two (2) user-programmable ultra-bright blue tail-light LEDs. Available in international safety orange or high-visibility yellow; includes shoulder strap and vehicle-mountable hard-wire charge rack.
- APPROVALS*:**  Most models meet applicable European Community Directives
NFPA Charge rack meets requirements of NFPA 1901-14.1.11.2 (2016) mounted in any position
- WARRANTY:** Streamlight's Limited Lifetime Warranty
- OPTIONAL ACCESSORIES:** 100V, 120V, 230V or 240V AC (home) and 12VDC (automobile) charge cords, hands-free shoulder strap (included with standard + VM models), locking charge rack, quick-release shoulder/waist strap



	FL1 STANDARD	HIGH	LOW
OUTPUT		615 LUMENS	330 LUMENS
RUNTIME		8h	18h
DISTANCE		126m	93m
INTENSITY		4000 cd	2150cd



*See product for specific ratings.

All performance claims to ANSI/NEMA FL1-2019 Standard

Issued: 11/24/09

Revised: 08/04/22

Rev: 1

Assembled in the USA.

Document #199