

POLYTAC®/POLYTAC® HP
LITHIUM POWER POLYMER FLASHLIGHT

MARKET: Sporting Goods, Fire & Rescue, Law Enforcement, Security, Hardware/Tool, Industrial, Automotive, Consumer.

DESCRIPTION: The PolyTac® is a bright and compact personal polymer light available with the latest in power LED technology and three different user selectable programs. The light features a superior grip texture to provide a comfortable but slip resistant feel. Packaged with a removable pocket clip.

CASE MATERIAL: High impact super tough nylon polymer for exceptional durability and a sure grip. All openings o-ring or gasket sealed. Available in black, yellow or coyote.

DIMENSIONS: **PolyTac®:**
 Length: 5.34 in. (13.56 cm)
 Body Diameter: 1.00 in. (2.54 cm)
 Head Diameter: 1.25 in. (3.18 cm)
 Major Diameter: 1.36 in. (3.45 cm)

PolyTac® HP:
 Length: 5.90 in. (14.98 cm)
 Body Diameter: 1.00 in. (2.54 cm)
 Head Diameter: 1.68 in. (4.26 cm)

WEIGHT: **PolyTac®:** 4.2 oz (121 grams)* **PolyTac® HP:** 5.2 oz (148 grams)*

LENS: **PolyTac®:** Glass lens, O-ring sealed.
PolyTac® HP: Unbreakable polycarbonate with scratch-resistant coating, o-ring sealed.

LIGHT SOURCE: C4® LED technology, impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT: See charts for specific model.



RUN TIME: See charts for specific model. All claims to 10% of initial lumen output. Strobe runtime: 5h 30 min.

ON/OFF: Multi-function, push-button tactical tail switch. One handed operation of momentary, variable intensity or strobe mode. Ten-Tap® programmable switch allows user selection of one of three different programs: high/strobe/low (factory default), high only, or low/medium/high.

BATTERIES: Two (2) 3 Volt CR123A Lithium batteries with a shelf life of 10 years.

FEATURES:



C4® LED technology.
 LED Solid State Power Regulation provides maximum light output throughout battery life.
 IPX7 rated design; waterproof to 1 meter for 30 minutes.
 3 meter impact resistance tested.
 Superior grip texture for sure grip.
 Ten-Tap® programmable switch allows user selection of one of three different programs.
 Removable pocket clip.
 Serialized for positive identification.

APPROVALS: **CE** Meets applicable European Community Directives
NFPA PolyTac® meets requirements of NFPA 1971-8.6 (2013)
 Note: PolyTac® HP is not recommended for Fire Helmet mounting.


WARRANTY: Streamlight's Limited Lifetime Warranty

OPTIONAL ACCESSORIES:

PolyTac®: Holster, Safety Wands, Colored Flip Lenses.

PolyTac® HP: N/A

	POLYTAC®				POLYTAC® HP			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		600 LUMENS	260 LUMENS	35 LUMENS		600 LUMENS	260 LUMENS	35 LUMENS
RUNTIME		2h 45min	5h 30m	34h		2h 45min	5h 30m	34h
DISTANCE		214m	140m	52m		297m	195m	72m
INTENSITY		11,500cd	4,900cd	675cd		22,000cd	9,500cd	1,300cd

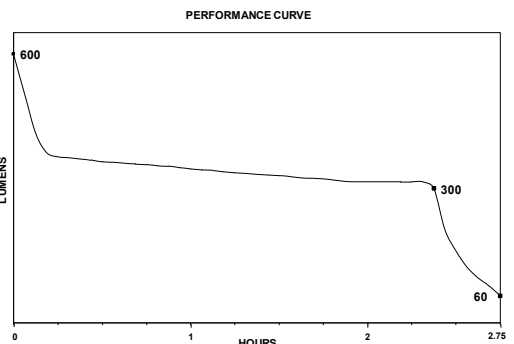

*With batteries; batteries included in purchase.
 All performance claims tested to ANSI/PLATO FL1-2016 Standard
 Issued: 10/24/2013
 Revised: 02/27/2018 Rev: 2