

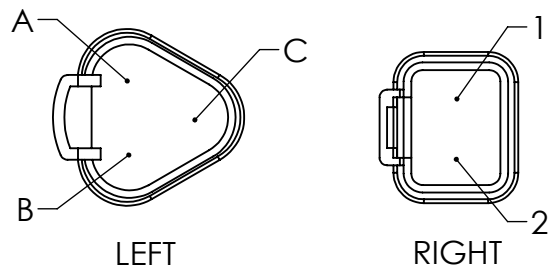
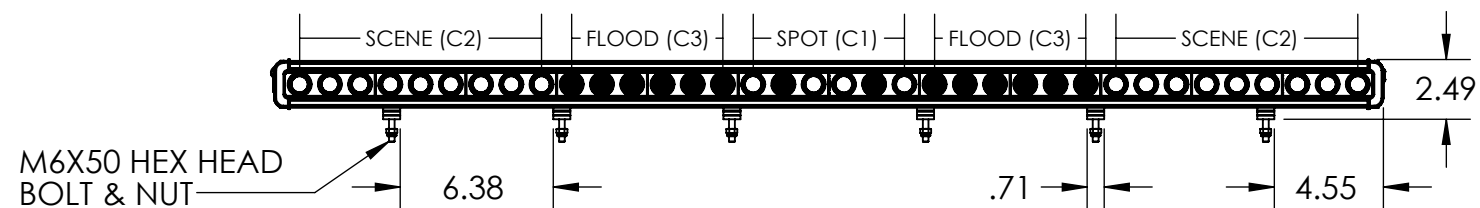




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ORIGINAL	10/17/2023	BH

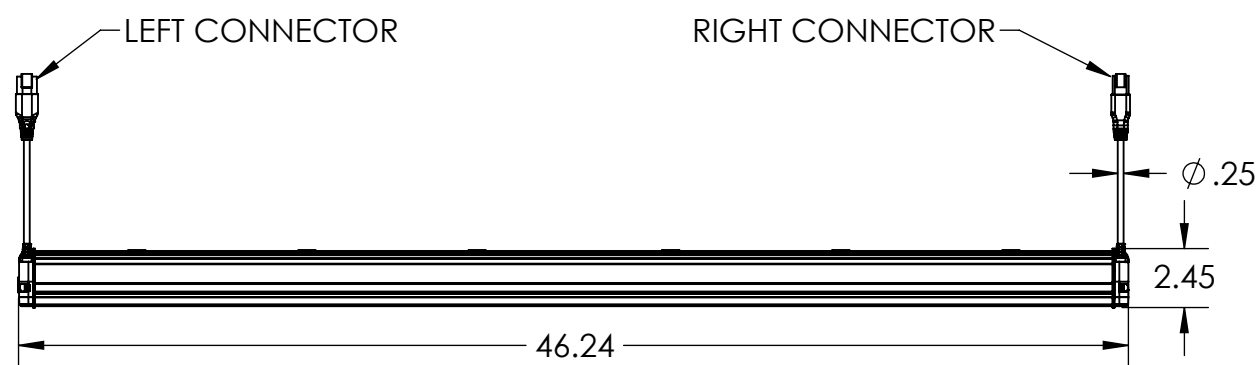

DEUTSCH CONNECTOR WIRING		
	LEFT CONNECTOR	RIGHT CONNECTOR
1/A (RED)	CIRCUIT 1 (SPOT)	CIRCUIT 2 (SCENE)
2/B (BLACK)	GROUND	GROUND
C (YELLOW)	CIRCUIT 3 (FLOOD)	N/A

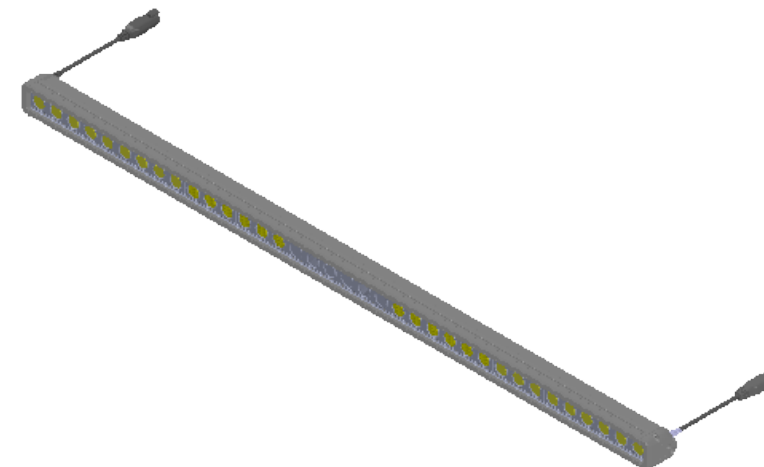

M6X50 HEX HEAD BOLT & NUT

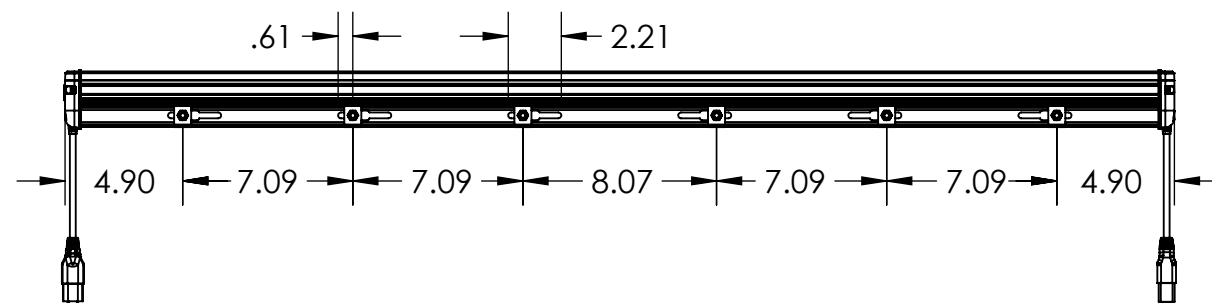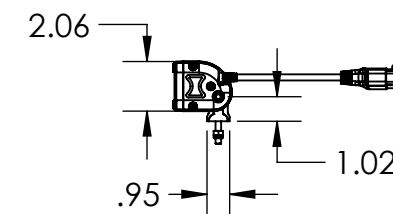

OPTICS	
SCENE	60°
FLOOD	40°
SPOT	25°
	10°

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HIZVIZ LIGHTING INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HIZVIZ LIGHTING INC. IS PROHIBITED.

**UNLESS OTHERWISE SPECIFIED:**  
 -DIMENSIONS ARE IN INCHES  
 -DIMENSIONS NOT SHOWN ARE FOUND IN 3D CAD DATA  
 -TOLERANCES  
 ANGULAR: ±0.25°  
 ONE PLACE DECIMAL: ±0.100  
 TWO PLACE DECIMAL: ±0.030  
 THREE PLACE DECIMAL: ±0.005

DESIGNED: BH	DATE: 10/17/2023	CURRENT: 14.1A @ 12.8V DC
CHECKED: WM	DATE: 10/17/2023	
APPROVED: SM	DATE: 10/17/2023	EFFECTIVE LUMENS: 13,495 lm
LENGTH: 46.4 in	WIDTH: 2.4 in	HEIGHT: 2.1 in
		IP RATING: IP68/69K

POWER: 180W
RAW LUMENS: 19,008 lm
WEIGHT: 10.5 lbs

<i>NOTE: CURRENT VARIES BASED ON VOLTAGE SUPPLIED</i>
OPERATING VOLTAGE: 9-32V DC
VIBRATION RATING: 21.2 Grms
TEMPERATURE RATING: -40 - 185° F



PART NAME		BROW LIGHT	
SIZE	PART NO.	REV	
<b>B</b>	FT-B-46-__	<b>A</b>	
SCALE: 1:12	DATE: 10/17/2023	SHEET 1 OF 1	