

PFP-18HPVGD-MR-CE

PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- 350000 Vanguard air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 2.25 Gallons (8.5 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 ½" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 ½" (65mm) suction inlet
- Dimensions: Length: 24 ½" (622 mm); Width: 23 ½" (597 mm); Height: 25 ¾" (654 mm)
- Weight: 170 lbs (77 kg)


INCLUDED ACCESSORIES

- Full control panel with pressure gauge, vacuum gauge, throttle, choke, starter, panel light and priming valve
- 16 Amps alternator
- Low oil alert
- 12-V battery

PERFORMANCE

255 GPM @ 25 PSI
220 GPM @ 50 PSI
140 GPM @ 100 PSI

75 GPM @ 150 PSI
30 GPM @ 175 PSI

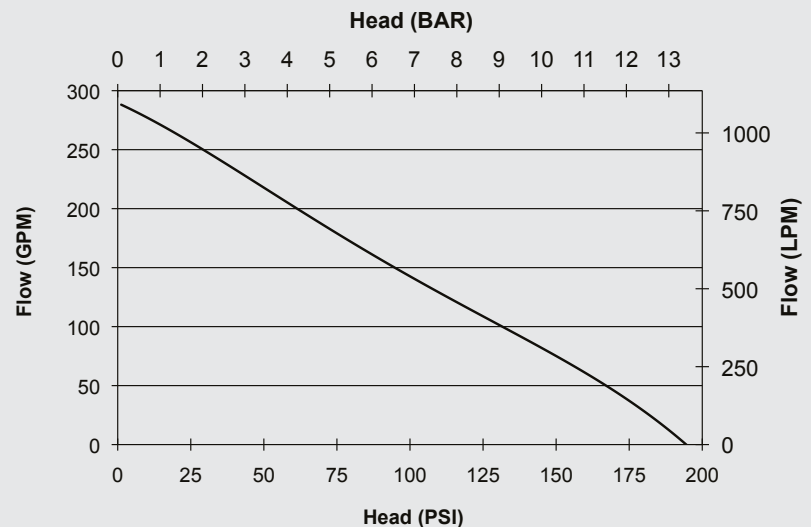


LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pump.com