

PFP-20HPKHL-1D

HIGH VOLUME PUMP

This pump is the ideal tool to fill your fire truck, supply your pump truck or carry water over a long distance.

Also available in skid version



ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 6 gallon (22 l) detachable fuel tank
- 20 amp. charging, regulated

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump.
- Pump body made from high resistance aluminum alloy.
- Bronze impeller.
- Mechanical shaft seal.
- Exhaust priming system, guaranteed up to 20' (6 meter) lift.
- One 2 1/2" (65 mm) delivery outlets with 1/4-turn ball valve.
- One 4" (100 mm) suction inlet.
- Dimensions: Length: 21 1/4" (540 mm)
Width: 26 1/2" (673 mm); Height: 24" (610 mm).
- Weight: 182 lbs (83 kg)


INCLUDED ACCESSORIES

- Pressure gauge
- 12-V battery

PERFORMANCE

485 GPM @ 10 PSI
430 GPM @ 25 PSI
350 GPM @ 50 PSI

250 GPM @ 75 PSI
140 GPM @ 100 PSI
65 GPM @ 125 PSI

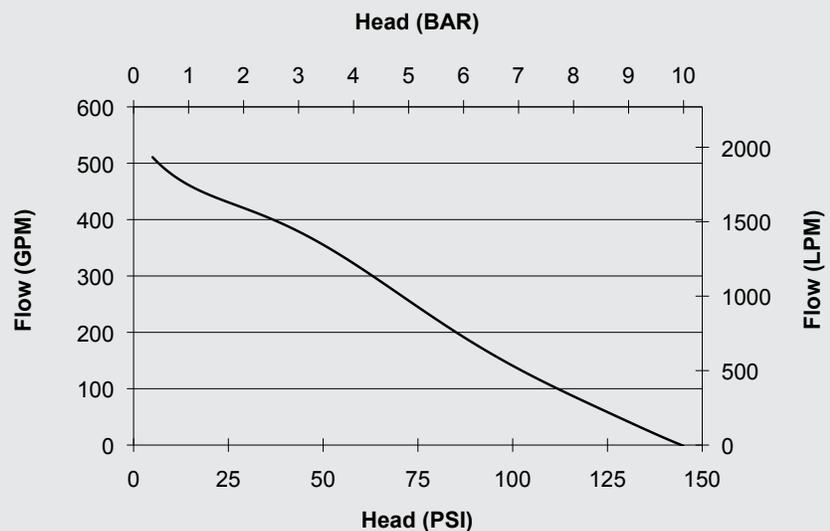

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com