

PFP-25HP-DSL

DIESEL POWERED PUMP

This high pressure/high volume pump is made to fight fires or supply water to the fire scene. The engine and pump are mounted on a steel protective frame with folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- D902 Kubota liquid cooled engine
- 3-cylinder, diesel engine
- Electric start
- 6 gallon (22 l) detachable fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. two stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impellers
- Mechanical shaft seal
- Stainless steel pump shaft
- Electric priming system, guaranteed up to 20' (6 meter) lift
- Two 2 1/2" (65 mm) delivery outlets
- One 4" (100 mm) suction inlet
- Dimensions: Length: 40 1/4" (1022 mm); Width: 23 1/2" (596 mm); Height: 26 5/8" (676 mm)
- Weight: 350 lbs (160 kg)


CONTROL PANEL

- Engine start/stop button
- Throttle control lever
- Operating panel light
- Pilot lights
- Pressure gauge
- Vacuum pressure gauge

PERFORMANCE

340 GPM @ 25 PSI
260 GPM @ 50 PSI
180 GPM @ 75 PSI

115 GPM @ 100 PSI
60 GPM @ 125 PSI

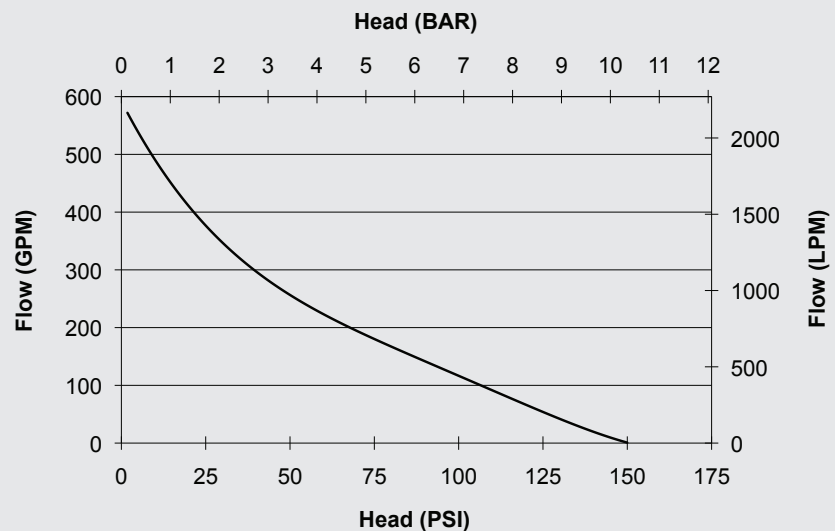

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com