

# PFP-27HP-2D

## PRESSURE AND VOLUME PUMP

*This pump is the ideal tool to fill your fire truck, supply your pump truck or carry water over a long distance.*

*Also available in skid version*



## ENGINE SPECIFICATIONS

- CH740 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start
- 6 gallon (22 l) detachable fuel tank
- 20 amp. charging, regulated

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- Two 2 1/2" (65 mm) delivery outlets fire type swing-out valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 28" (710mm); Width: 22" (560mm); Height: 24-1/2" (620mm)
- Weight: 194 lbs (88.2Kg)


## INCLUDED ACCESSORIES

- Pressure gauge
- 12-V battery

## PERFORMANCE

**475 GPM @ 10 PSI**  
**390 GPM @ 25 PSI**  
**210 GPM @ 75 PSI**

**140 GPM @ 100 PSI**  
**25 GPM @ 125 PSI**

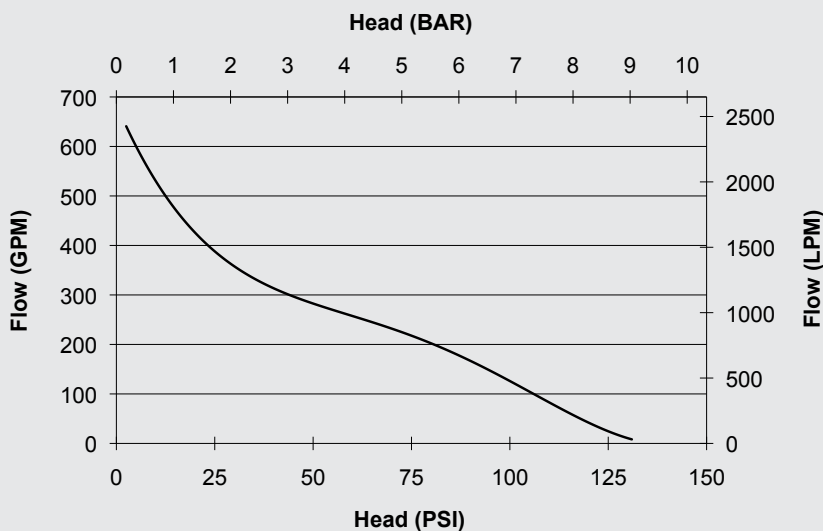

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)