

# PFP-30HPKHL-2D

## HIGH VOLUME PUMP

*This pump is the ideal tool to fill your fire truck, supply your pump truck or carry water over a long distance.*

*Also available in skid version*



## ENGINE SPECIFICATIONS

- CH750 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start
- 20 amp. charging, regulated
- 6 gallon (22 l) detachable fuel tank

## PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift.
- Two 2 1/2" (65 mm) delivery outlets with 1/4-turn ball valve
- One 4" (100 mm) suction inlet
- Dimensions: Length: 26" (660 mm); Width: 21 1/2" (546 mm); Height: 24 1/2" (622 mm)
- Weight: 198 lbs (89 kg)


## INCLUDED ACCESSORIES

- Pressure gauge
- 12-V battery

## PERFORMANCE

**535 GPM @ 10 PSI**  
**470 GPM @ 25 PSI**  
**250 GPM @ 75 PSI**

**170 GPM @ 100 PSI**  
**55 GPM @ 125 PSI**

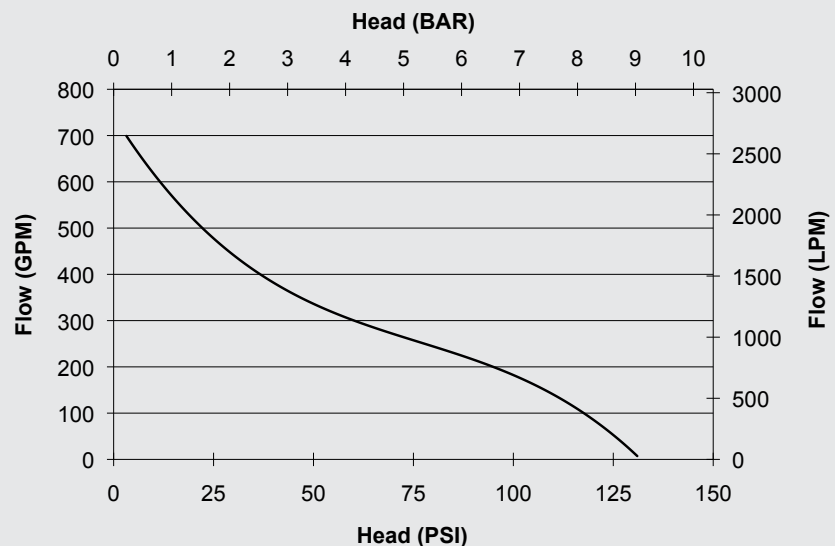

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)