

# PFP-38HPKHL-2D

## GAS POWERED PUMP

*This high pressure/high volume pump is made to fight fire or supply water to the fire scene. Engine and pump are mounted on a chassis made of profile steel with shock absorbers and 4 heavy duty carrying handles.*

*Also available in skid version*



## ENGINE SPECIFICATIONS

- CH1000 Kohler air cooled engine.
- 2-cylinder, 4-stroke gasoline engine
- 12V electric start
- 6 gallon (22 l) detachable fuel tank

## PUMP UNIT SPECIFICATIONS

- C.E.T. is using the new technology fo a dual stage centrifugal pump.
- Pump body made from resistant aluminum alloy
- Bronze impellers
- Mechanical shaft seal
- Stainless steel pump shaft
- Exhaust priming system, guaranteed up to 20' (6 meter) lift.
- Two 2 1/2" (65 mm) delivery outlets
- One 4" (100 mm) suction inlet
- Dimensions: Length: 37" (940 mm)  
Width: 26" (660 mm); Height: 31" (787 mm)
- Weight: 275 lbs (125 kg)


## CONTROL PANEL

- Engine start/stop button
- Oil control lamp
- Throttle control lever
- Operating panel light
- Choke control lever
- Pressure gauge
- Vacuum pressure gauge

## PERFORMANCE

**MAX FLOW : 675 GPM**  
**MAX PRESSURE : 190 PSI**  
**465 GPM @ 25 PSI**

**380 GPM @ 50 PSI**  
**225 GPM @ 100 PSI**  
**120 GPM @ 150 PSI**

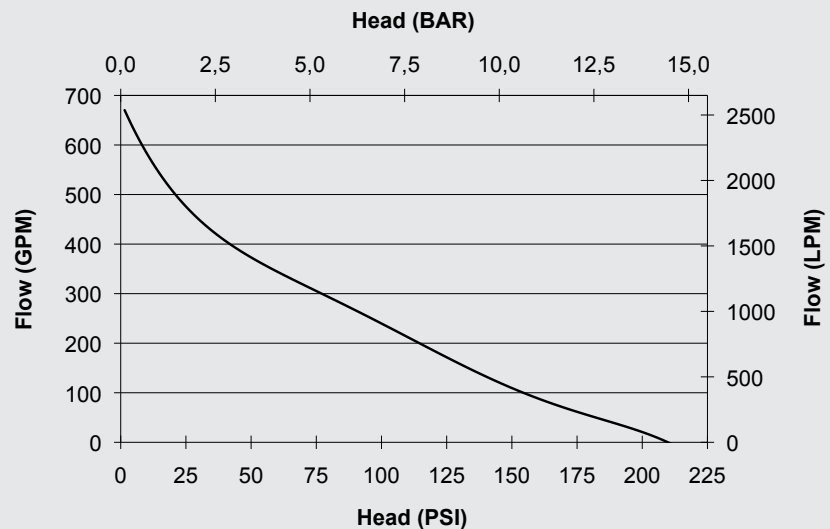

0217

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)