

SM-PFP-20HPKHL-MR

PRESSURE AND VOLUME PUMP

This pressure/volume pump is the most suitable for drop-in units. The engine and pump are mounted on skid frame. The skid version is easily mountable on vehicles and trailers.

Also available in portable version



ENGINE SPECIFICATIONS

- CH640 Kohler air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- Electric start with recoil start as backup
- 20 amp. charging, regulated

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38 mm) NPT-M delivery outlet flange
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 21 1/2" (546 mm); Width: 25" (635 mm) ; Height: 24" (610 mm)
- Wet weight: 156 lbs (71 kg)


INCLUDED ACCESSORIES

- Throttle control vernier
- Low oil alert
- Pressure gauge
- Quick connect for 12-V battery

PERFORMANCE

MAX FLOW: 290 GPM
MAX PRESSURE: 220 PSI
265 GPM @ 50 PSI

190 GPM @ 100 PSI
140 GPM @ 150 PSI
60 GPM @ 200 PSI

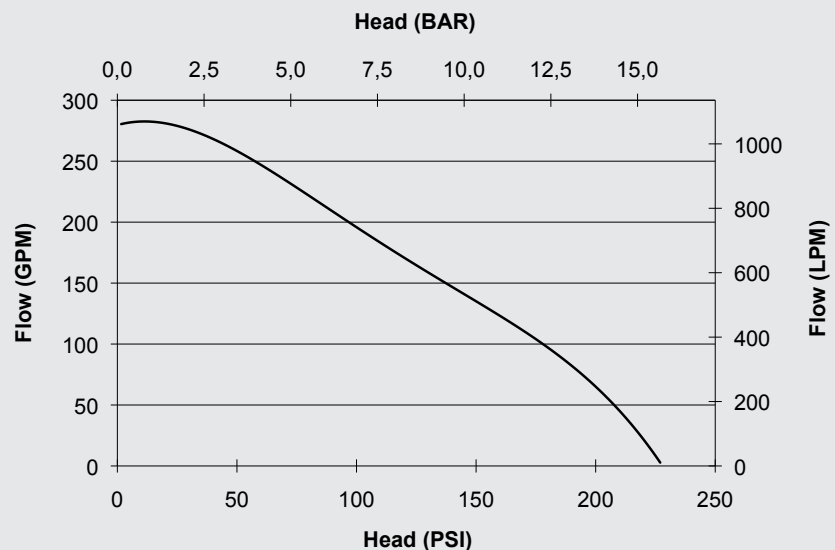


LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com