

# SM-PFP-6HPHND-EM-TWIN

## HONDA POWERED PUMP

*The Goliath model is a compact pump that delivers amazing pressure performance so as to meet the needs of several applications.*

*Also available in portable version*



## ENGINE SPECIFICATIONS

- GX200 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 0.8 gallon (3.1 l) integrated fuel tank
- Charge Coil 12V-1A

## PUMP UNIT SPECIFICATIONS

- C.E.T. dual stage centrifugal pump
- Pump body made from aluminum
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1" (25 mm) delivery outlets and one 1 1/2" (38 mm) NPSH delivery outlet
- One 1 1/2" (38 mm) NPSH suction inlet
- Dimensions: Length: 20" (508 mm); Width: 20" (508 mm); Height: 17 1/2" (445 mm)
- Wet weight: 83 lbs (38 kg)


## INCLUDED ACCESSORIES

- Low oil alert.

## PERFORMANCE

**MAX FLOW: 75 GPM**  
**MAX PRESSURE: 140 PSI**  
**70 GPM @ 10 PSI**

**65 GPM @ 50 PSI**  
**45 GPM @ 100 PSI**  
**35 GPM @ 125 PSI**

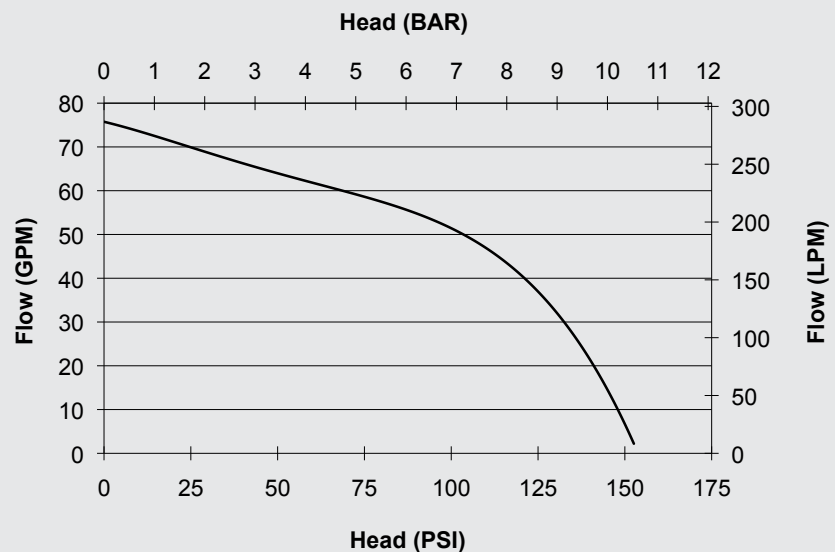

## LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY  
OF ENGINEERING  
FOR THE BRAVEST

75 Hector St., P.O. Box 90,  
Pierreville (Québec)  
Canada J0G 1J0  
Phone : 1-800-567-2719  
Fax : 1-800-434-2613  
[www.fire-pumps.com](http://www.fire-pumps.com)