

SM-PFP-9HPHND-EM-TWIN

HONDA POWERED PUMP

The Goliath model is a compact pump that delivers amazing pressure performance so as to meet the needs of several applications.

Also available in portable version



ENGINE SPECIFICATIONS

- GX270 Honda air cooled engine
- Single cylinder, 4-stroke gasoline engine
- 12V electric start with recoil start as backup
- 1.4 gallon (5.3 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- C.E.T. dual stage centrifugal pump
- Pump body made from aluminum
- Aluminum impeller
- Mechanical shaft seal
- Self priming system
- Two 1" (25 mm) delivery outlets and one 1 ½" (38 mm)NPSH delivery outlet
- One 1 ½" (38 mm) NPSH suction inlet
- Dimensions: Length: 20 ½" (520 mm); Width: 24" (610 mm); Height: 19" (480 mm)
- Wet weight: 110 lbs (50 kg)

INCLUDED ACCESSORIES

- Low oil alert

LIMITED WARRANTY

- 3 YEARS

PERFORMANCE

70 GPM @ 10 PSI


60 GPM @ 50 PSI

55 GPM @ 100 PSI

40 GPM @ 125 PSI

MAX FLOW: 75 GPM

MAX PRESSURE: 140 PSI

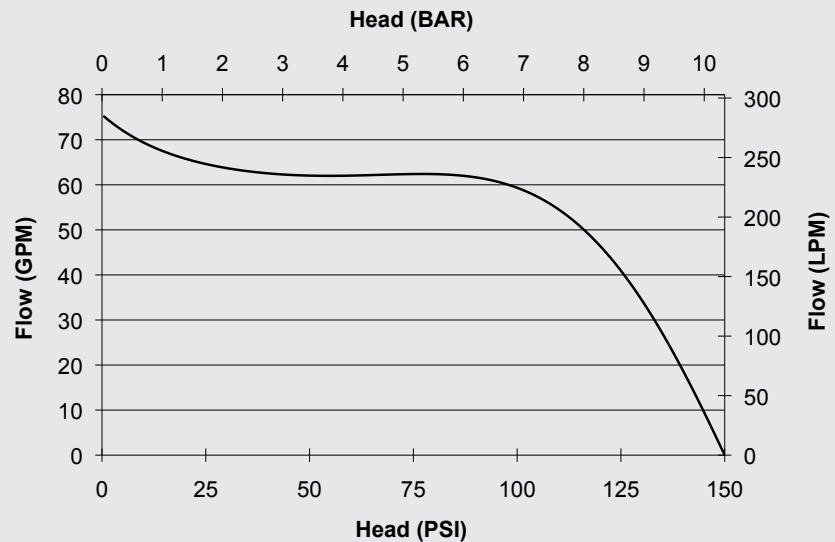

ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com