

X-Series Intrinsically Safe Dual-Light™ Flashlight with Dual Magnets

Flashlight



Floodlight



Dual-Light



TECHNOLOGY



210 Flashlight
Lumens

130 Floodlight
Lumens

285 Dual-Light™
Lumens

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present
- Dual Integrated hands-free magnets
- Beam distance rated at 187 meters
- Engineered polymer housing

This Dual-Light™ Flashlight is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5422GMX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. A 130 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and the pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA premium batteries (not included).

INTRINSICALLY SAFE



XPP 5422GMX

X-Series Intrinsically Safe Dual-Light™ Flashlight with Dual Magnets

FEATURES

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present
- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Powerful integrated magnets built into the base and pocket clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Dustproof / Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty




Built in pocket/belt clip with integrated magnet

Integrated magnet built into the handle

High-efficiency deep parabolic reflector

Wide-beam floodlight

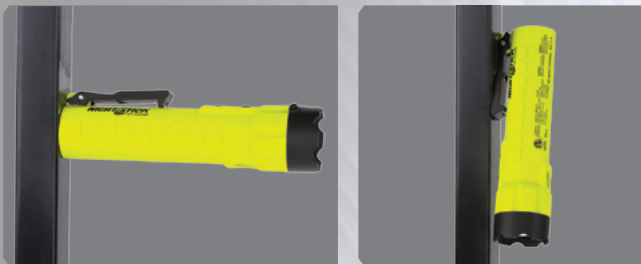

Hands-free magnet in base

Hands-free magnet in pocket clip

SPECIFICATIONS

- Lumens: flashlight-210, floodlight-130, dual-light-285
- Run-time: flashlight-14 hrs, floodlight-20 hrs, dual-light-10 hrs
- Beam distance: 187 meters
- Water / Dust rating: IP-67
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz

FL 1 STANDARD		
210 LUMENS	14h	187m
7970cd	2m	1m

INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

SAFETY RATING

cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Patent 7,738,229

Bayco Products, Inc. XPP-5422GMX 640 S. Sanden Blvd. Wylie, TX 75098	
ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	0359 INMETRO NCC 15088 X
Intertek CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia op is I Ma Ⓢ II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13.ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA-Alkaline
Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422GMX	80585 8