


FOL-DA-TANK®

The Original
Portable Water Tank

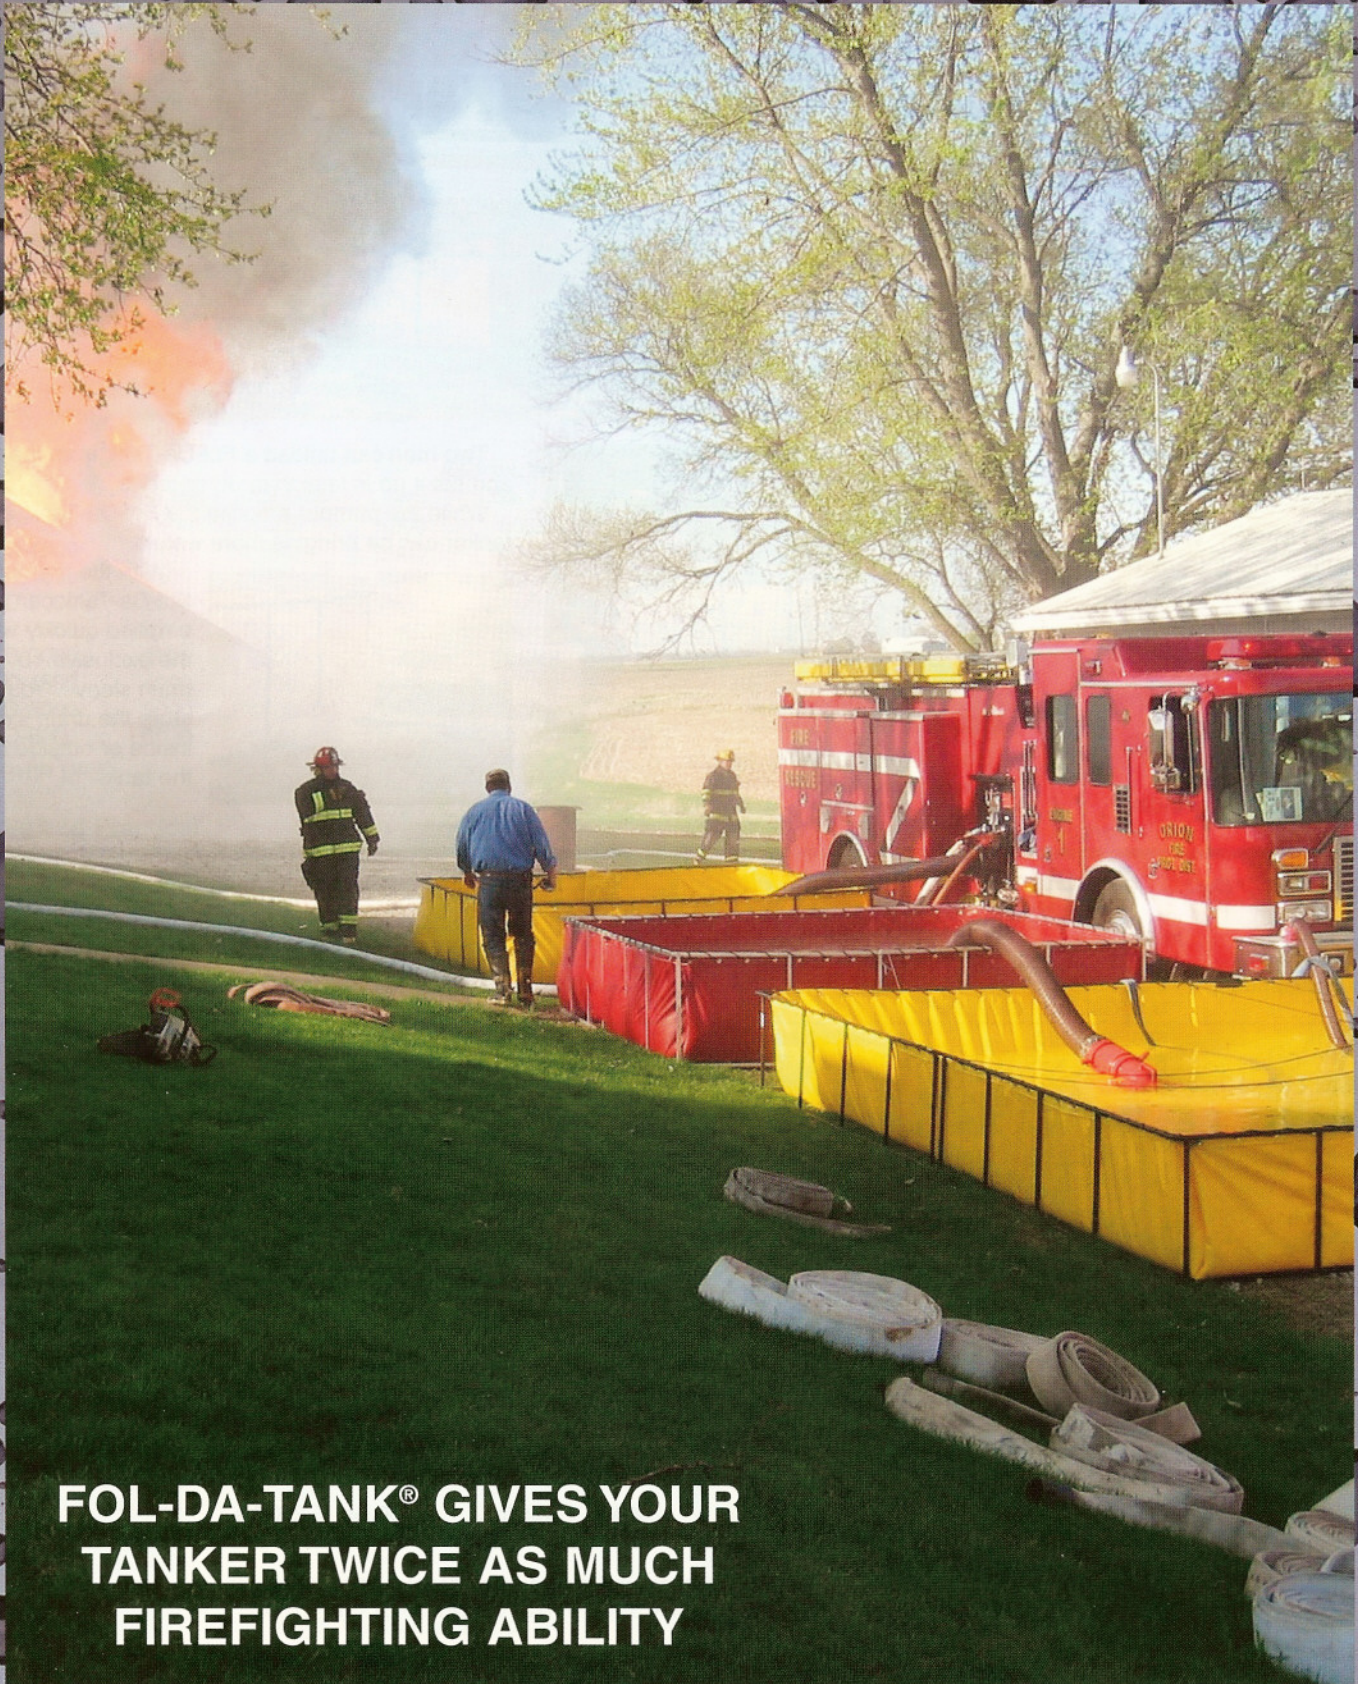

**FOL-DA-TANK® GIVES YOUR
TANKER TWICE AS MUCH
FIREFIGHTING ABILITY**

The first and still the best . . . Portable Collapsible Tank

It was more than 50 years ago that the first Fol-Da-Tank was introduced to firefighters, who recognized its value and quality immediately. Fol-Da-Tank Co. has been continually improving frame and fabric designs to help provide the most reliable portable water tank in the industry.

Fol-Da-Tank has proved to be the practical answer as an extra water supply for rural areas, where water pressure is low or as a back-up facility for municipal fire departments. It's available in nine standard sizes.

Fol-Da-Tank doubles the fire-fighting ability of a tanker truck at an affordable price.



■ Double fold frames available on all frame sizes

Two men can unload a Fol-Da-Tank from the truck and set it up in less than 30 seconds.

While the pumper empties the Fol-Da-Tank, a tanker can be bringing more water.



With the fire out, Fol-Da-Tank can be emptied quickly with the exclusive 10" dia. drain sleeve. You can store the drain sleeve inside or outside of the tank.

Construction Features

- Liners – Hypalon, Vinyl, FDA, Chemical Resistant, Canvas
- Frames – Steel – Resistance welded 14-gauge 7/8" round steel tubing with snag free finish
Aluminum – 1" square x 1/8" wall Aluminum with snag free finish
- Hinges – Die-cut
Grommets – Solid Brass
Bolts – Heavy duty
- The original double folding tank available

Tank Sizes

Steel – 29" High x 7" Width Alum. – 28-5/8" High x 9" Width
(shipping carton is 30" high for both frames)

Part No.- Steel (S)	FDTS-600	FDTS-1000	FDTS-1500	FDTS-2100	FDTS-2500*
Part No.- Aluminum (A)	FDTA-600	FDTA-1000	FDTA-1500	FDTA-2100	FDTA-2500*
	U.S. Gal./Imp. Gal./Liter				
Dimensions	600/500/2200	1000/830/3800	1500/1250/5600	2100/1750/7500	2500/2000/9500
FEET Open	6'3" x 6'3" x 29"	8'3" x 8'3" x 29"	10'3" x 10'3" x 29"	11'3" x 11'3" x 29"	12'3" x 12'3" x 29"
Approximate Closed	6'3" x 7" x 29"	8'3" x 7" x 29"	10'3" x 7" x 29"	11'3" x 7" x 29"	12'3" x 7" x 29"
METERS Open	1.8 x 1.8 x .71	2.4 x 2.4 x .71	3 x 3 x .71	3.4 x 3.4 x .71	3.7 x 3.7 x .71
Closed	1.8 x .18 x .71	2.4 x .18 x .71	3 x .18 x .71	3.4 x .18 x .71	3.7 x .18 x .71
Approximate	95 lbs. / 70 lbs.	125 lbs. / 95 lbs.	145 lbs. / 110 lbs.	165 lbs. / 125 lbs.	175 lbs. / 130 lbs.
Shipping Weight	43 KG / 31 KG	52 KG / 43 KG	66 KG / 50 KG	75 KG / 57 KG	80 KG / 59 KG
(Steel/Aluminum)					

LINER FABRICS:

22 OZ. CANVAS - OLIVE DRAB, 17 OZ. HYPALON - RED OR YELLOW, 22 OZ. HYPALON - RED OR YELLOW, 22 OZ. VINYL - RED OR YELLOW, 30 OZ. VINYL - ORANGE ONLY. (other vinyl colors available)

Part No.- Steel	FDTS-3000*	FDTS-3500*	FDTS-4000*	FDTS-5000*
Part No.- Aluminum	FDTA-3000*	FDTA-3500*	FDTA-4000*	FDTA-5000*
Dimensions	3000/2500/11300	3500/2900/13250	4000/3300/15000	5000/4100/19000
FEET Open	13'3" x 13'3" x 29"	14'3" x 14'3" x 29"	15'3" x 15'3" x 29"	17' x 20' x 24"
Approximate Closed	13'3" x 7" x 29"	14'3" x 7" x 29"	15'3" x 7" x 29"	10' x 15" x 24"
METERS Open	4 x 4 x .71	4.2 x 4.2 x .71	4.6 x 4.6 x .71	5.2 x 6.1 x .61
Closed	4 x .18 x .71	4.2 x .18 x .71	4.6 x .18 x .71	3.0 x .38 x .61
Approximate	185 lbs. / 135 lbs.	210 lbs. / 155 lbs.	250 lbs. / 185 lbs.	300 lbs. / 220 lbs.
Shipping Weight	84 KG / 61 KG	95 KG / 70 KG	114 KG / 84 KG	136 KG / 100 KG
(Steel/Aluminum)				

LINER FABRICS:

22 OZ. CANVAS - OLIVE DRAB, 17 OZ. HYPALON - RED OR YELLOW, 22 OZ. HYPALON - RED OR YELLOW, 22 OZ. VINYL - RED, YELLOW, BLACK, BLUE, AND GREEN, 30 OZ. VINYL - ORANGE, RED AND YELLOW.

PK – Patch Kits contents - 1 pint cement, approximately 1 yard material, 1 seam roller, 1 scissors, 1 carry box.

*Two drain sleeves

REPLACEMENT LINERS & FRAMES

Replacement liners and frames are available to fit all Fol-Da-Tank frame sizes.

Part No.

FDTL (Liner only)

FDTF-S (Steel frame only)

FDTF-A (Aluminum frame only)

CUSTOM LINERS & FRAMES

Custom liners and frames can be made to fit all manufacturer's portable tanks. i.e., rectangular, higher, lower.

FRAMES

Steel - 29" High - Round or Square Tube.

Aluminum - 28 5/8" High - Square Tube 26% lighter than steel

(On cover: 1 - 5000 Steel, 1 - 2100 Aluminum, 1 - 2100 Steel, 6" Clapper Valve attached to 6" L.F.)

Self-Supporting Frameless Portable Water Tank

- No Steel Frame
- Totally Self-Supporting
- Unique Flotation Collar

The self-supporting frameless portable water tanks have been designed to meet the most stringent requirements of rural/urban fire fighting. Problems with inadequate or unusable supplies of water are eliminated by the use of open top self-supporting portable water tanks. In remote areas the self-supporting tanks are designed for standby water containment, for water shuttling situations and to provide a continuous portable water supply. In remote areas, the SST may be filled by pumping water from a natural water source, such as a stream or creek, with a small gas operated pump. As the self-supporting tank begins to fill with water, it's unique design allows it to become self supporting automatically. The SST does not require any additional supporting framework, assembly, or frame installation.



FIRE DEPT. MODEL

Applications

- Fire Fighting
- Water Relay
- Water Storage
- Mixing Tank (Fire retardant)
- Hazardous Waste

LOW SIDES DUMPING AND DRAFTING TANKER OPERATIONS

SIZES Part No.	US Gal.	Imp. Gal.	Liters	Approx. Weights		Dimensions Feet / Meter		Approx. Folded Dimensions (± 6") Inches / Centimeters	
				Lbs. / KG					
*SSTFD- 500	500	420	1900	50/23		2'8" x 5' x 6'6" / .81 x 1.5 x 2		24" x 17" / 61 x 43	
*SSTFD-1000	1000	830	3800	60/27		2'8" x 7'.3" x 8'10" / .81 x 2.2 x 2.7		26" x 18" / 66 x 46	
*SSTFD-1500	1500	1250	5600	75/34		2'8" x 9'2" x 11'10" / .81 x 2.8 x 3.6		26" x 20" / 66 x 51	
*SSTFD-2000	2000	1650	7500	75/34		2'8" x 10' x 12'5" / .81 x 3 x 3.8		26" x 20" / 66 x 51	
SSTFD-2500	2500	2000	9500	95/43		2'8" x 12' x 13'6" / .81 x 3.7 x 4		34" x 22" / 86 x 56	
SSTFD-3000	3000	2500	11300	105/48		2'8" x 13' x 14'9" / .81 x 4 x 4.5		34" x 22" / 86 x 56	
SSTFD-4000	4000	3300	15000	110/50		2'8" x 14' x 16' / .81 x 4.3 x 4.9		36" x 24" / 91 x 61	
SSTFD-5000	5000	4100	19000	130/59		2'8" x 17' x 19' / .81 x 5.2 x 5.8		38" x 26" / 97 x 66	
SSTFD-6000	6000	5000	19000	130/59		34" x 17'8" x 21'2" / .864 x 5.4 x 6.45		40" x 28" / 101.6 x 71	

*CAN SHIP UPS

Portable and Practical

When no longer in use, the SST may be quickly drained through a fitting on the side. The SST is totally collapsible and easily stored in it's own compact storage bag. It can be stored in the side or back of a truck, or the cargo compartment of a helicopter.

Features

- Easy one man set-up
- Self-supporting – **NO** frame work
- Solid collar – **NO** need to inflate
- **NO** foot pump necessary
- **NO** auxiliary air
- **NO** assembly
- All self-supporting tanks are supplied with one threaded flange coupling installed. Sizes 1-1/2"– 5", NST or IPT, male or female (Specify choice)
- Any number and size of hose connections can be added for bottom drafting.
- All seams welded for longer life
- Heavy duty vinyl (PVC)
- Easily repairable
- Compact storage bag included
- 4 support rings

*NOTE: NSF-61 PW3 potable water models with top covers available.

*Artic, XR-5, and urethane fabrics available



Threaded Flange Coupling shown mounted on re-enforced patch

Aluminum Flanges

Part No.	Size	COLORS:
FLC-1.5	1-1/2" / 4cm	Red
FLC-2	2" / 5cm	Yellow
FLC-2.5	2-1/2" / 6cm	Orange
FLC-3	3" / 8cm	Blue
FLC-4	4" / 10cm	Black
FLC-4.5	4-1/2" / 11cm	Green
FLC-5	5" / 13cm	
FLC-6	6" / 15cm	

Options

- Male or female
- Special threads
- Brass couplings
- Storz & camlocks

AVAILABLE: Ground Covers
Patch Kits
Stencilling

Top Covers
Storz Connections
6" Flange Couplings



Hose Support Stand



Storage Bag

Forestry Products

"Flying Water Series" Multifunctional Helicopterable Tank



PART NO. 72F
 CAPACITY – 72 U.S. Gal.
 60 IMP. Gal.
 270 Liters
 DIMENSIONS: Inches CM
 Collapsed 21" x 20" x 8" / 53 x 51 x 20
 Filled 45"W x 39"H / 114 x 100
 Empty weight 10 lbs. / 5 KG
 Discharge – 1" Hose with 3/4" Spigot
 Filler – 4" Diameter
Pyramid Shape
Heavy Duty (PVC) Vinyl
Transportable by Helicopter or Truck

PART NO. 134F
 CAPACITY – 134 U.S. Gal.
 110 IMP. Gal.
 510 Liters
 DIMENSIONS: Inches CM
 Collapsed 19" x 26" x 4.5" / 48 x 66 x 12
 Filled 53"W x 43"H / 135 x 110
 Empty weight 12 lbs. / 6 KG
 Discharge – 1" Hose with 3/4" Spigot
 Filler – 4" Diameter

USES:

- 1) Filling Back Packs
- 2) Small/Light Pumps
- a) Water
- 3) Gravity Feed Reservoirs
- b) Control burning embers
- 4) Potable water – available
- c) Retardants
- (Part No. PW72 / PW134) NSF/FDA

Model#	FLY200	FLY300
Weight Filled	2030 lbs. (919kg)	3100 lbs. (1400kg)
Collapsed Dim.	27" x 29" x 8"	30" x 32" x 12"
Fill Port	4"	4"
Outlet	1.5" Ball Valve	1.5" Ball Valve
Weight Empty	25 lbs. (12kg)	35 lbs. (16kg)
Capacity	240 gallons, 900L, 200IMP	360 gallons, 1360L, 300IMP

Fol-Da-Tank® Collapsible Tanks for Water Shuttle and Storage (Pillow Style)



Potable Water Tank



Gray Water Tank

MATERIAL SPECIFICATIONS 8130 PW3 NSF/FDA

Background – 8130 PW3 is a Polyester fabric-based membrane with a PVC coating. The PVC coating is National Sanitation-approved for contact with potable water.

Warranty – The 8130 PW3 NSF/FDA Vinyl is offered with a 7-year limited warranty for weathering.

(OPTIONAL FABRICS AVAILABLE)

- XR-5** – Chemical Resistant
 - URETHENE** – Potable & Chemical Resistant
 - GEOGARD** – Gray Water (shower water storage)
- Call for pricing**

APPLICATIONS

- Fire Fighting – Water shuttle and storage
- Construction sites
- Feeding livestock
- Mixing fertilizer, pesticides or herbicides
- For parks and nurseries – anywhere water sources are scarce
- Drinking water source
- Store shower decon water
- Transport wine

The tanks are **NOT** designed for handling petroleum products.

FEATURES

- NSF/FDA approved rugged PVC (coated nylon)
- Eleven (11) standard sizes
- Compact–easy to store–folds down to 18"x18"x18"/46x46x46cm
- Resists chemical contamination, mildew, rot and solar heat
- RF welded seams for longer life
- Severe weather tolerance to -40°F
- Fills and empties in minutes by pump or gravity flow
- Easily handled by one man
- 1-1/2" / 4cm ball valve with female threads
- Large 4" / 10cm dia. fill opening
- Transportable by truck
- Potable water fabric is NSF-61 approved

75 U.S. GALS TO 5000 U.S. GALS (CUSTOM SIZES AVAILABLE)

PART NO. GRAY WATER	PART NO. POTABLE	PART NO. CHEMICAL. RESISTANT	DIM. FILLED +/-6" L x W x H	METERS	U.S. GAL.	IMP. GAL	LITERS	LBS.	KG.
GW-100	PW-100	CR-100	4'6" x 4'10" x 16"	1.4 x 1.5 x .41	100	83	379	15	7
GW-275	PW-275	CR-275	6'6" x 6' x 16"	2 x 1.8 x .41	275	230	1000	23	10
GW-525	PW-525	CR-525	8'3" x 5'4" x 18"	2.5 x 1.7 x .46	525	440	1900	33	15
GW-800	PW-800	CR-800	10' x 6' x 2'	3 x 1.8 x .60	800	660	3000	42	19
GW-1140	PW-1140	CR-1140	12' x 7' x 2'	3.7 x 2 x .60	1140	950	4300	58	26
GW-1340	PW-1340	CR-1340	14' x 7' x 2'	4.3 x 2 x .60	1340	1100	5000	64	29
GW-1500	PW-1500	CR-1500	14'11" x 9'5" x 2'	4.6 x 2.9 x .6	1500	1249	5670	67	31
GW-2000	PW-2000	CR-2000	10'5" x 12'0" x 2'	3.2 x 3.7 x .6	2000	1650	7500	82	37
GW-2500	PW-2500	CR-2500	12'7" x 14' x 2'	3.9 x 4.3 x .6	2500	2080	9460	90	44
GW-3000	PW-3000	CR-3000	11'10" x 14'0" x 2'6"	3.6 x 4.3 x .7	3000	2500	11300	104	47
GW-4000	PW-4000	CR-4000	18' x 14' x 3'	5.5 x 4.3 x .9	4000	3330	15140	120	55
GW-5000	PW-5000	CR-5000	14'7" x 18'10" x 3'	5.5 x 4.3 x .9	5000	4100	19000	142	64

*SIZES 2000 AND UP EQUIPPED WITH ONE 2" BALL VALVE AND CAM LOCK FITTING.

Self-Supporting Frameless Portable Water Tank

- No Steel Frame
- Totally Self-Supporting
- Unique Flotation Collar



6,000 Gallon Tank shown

FOREST SERVICE MODEL HIGH SIDE – AGRICULTURAL / INDUSTRIAL SHUTTLE AND STORAGE

FEATURES

- Special high sides
- Easy one man set-up
- Self-supporting – **NO** frame work
- Solid collar – **NO** need to inflate
- **NO** foot pump necessary
- **NO** assembly
- Heavy duty vinyl (PVC)
- 4 support rings
- Easily repairable
- All seams welded for longer life
- Compact storage bag included
- All self-supporting tanks are supplied with one aluminum threaded flange coupling installed. Sizes 1-1/2"– 5", NST or IPT, male or female (Specify choice)
- Any number and size of hose connections can be added for bottom drafting

COLORS:

- Red
- Yellow
- Orange
- Blue
- Black
- Green

Applications

- Fire Fighting
- Helicopter Dip Tank
- Water Relay
- Water Storage
- Mixing Tank (Fire retardant)
- Hazardous Waste

AVAILABLE:

- Ground Covers
- Patch Kits
- Stenciling
- Top Covers
- Storz Connections
- 6" Flange Couplings

SIZES Part No.	US Gal.	Imp. Gal.	Liters	Approx. Weights		Dimensions		Approx. Folded Dimensions (± 6")	
				Lbs.	/ KG	Feet / Meter	Inches / Centimeters		
*SSTFS- 500	500	420	1900	50/23		3' x 5' x 6'6" / .9 x 1.5 x 2		24" x 17" / 61 x 43	
*SSTFS-1000	1000	830	3800	60/27		4' x 7' x 8'2" / 1.2 x 2 x 2.5		26" x 18" / 66 x 46	
*SSTFS-1200	1200	1000	4500	60/27		4' x 7' x 8'10" / 1.2 x 2 x 2.7		26" x 20" / 66 x 51	
*SSTFS-1600	1600	1300	6000	75/34		4' x 7' x 9'6" / 1.2 x 2 x 2.9		26" x 20" / 66 x 51	
*SSTFS-1800	1800	1500	6800	75/34		4' x 7' x 9'10" / 1.2 x 2 x 3		26" x 20" / 66 x 51	
*SSTFS-2000	2000	1650	7500	75/34		4' x 7'5" x 10'8" / 1.2 x 2.3 x 3.2		26" x 20" / 66 x 51	
SSTFS-2500	2500	2000	9500	95/43		4' x 8' x 12'6" / 1.2 x 2.4 x 3.8		34" x 22" / 86 x 56	
SSTFS-3000	3000	2500	11300	105/48		4' x 9'10" x 13'1" / 1.2 x 3 x 4		34" x 22" / 86 x 56	
SSTFS-4000	4000	3300	15000	110/50		4' x 12'2" x 16'10" / 1.2 x 3.7 x 5		36" x 24" / 91 x 61	
SSTFS-4800	4800	4000	18200	110/50		5' x 11' x 16' / 1.5 x 5 x 3.3		38" x 26" / 97 x 66	
SSTFS-5000	5000	4100	19000	130/59		4' x 13' x 17'6" / 5.3 x 4 x 1.2		38" x 26" / 97 x 66	
SSTFS-6000	6000	5000	22700	125/57		5' x 12' x 17' / 1.5 x 3.7 x 5.3		40" x 28" / 102 x 71	
SSTFS-10000	10000	8000	36320	200/91		6'8" x 12' x 19'8" / 2 x 3.7 x 6		44" x 36" / 112 x 92	
SSTFS-14000	14000	12000	54500	250/113		7'9" x 12' x 21'8" / 2.4 x 3.7 x 6.6		48" x 38" / 121 x 97	
SSTFS-20000	20000	16667	75700	400/181		8' x 18' x 24' / 2.44 x 5.5 x 7.3			

*CAN SHIP UPS

Relay/Storage Tank



Heavy Duty (PVC) Vinyl

Optional fabrics: NSF/FDA or XR-5 Chem. Resistant.

Additional flange can be installed on tank.

SHIP UPS

Part No.	Capacity	Dimensions (INCHES / METERS)	Empty Weight
Part No. 150RS –	150 gallon tank	– 48" x 48" x 28" / 1.2 x 1.2 x .71	12 lbs. 6 oz. / 4KG*
Part No. 300RS –	300 gallon tank	– 60" x 60" x 30" / 1.5 x 1.5 x .76	18 lbs. / 6KG*
Part No. 750RS –	750 gallon tank	– 86" x 86" x 45" / 2.1 x 2.1 x 1.1	32 lbs. / 14KG
Part No. 1500RS –	1500 gallon tank	– 108" x 108" x 56" / 2.7 x 2.7 x 1.4	47 lbs. / 21KG

Complete with one flange/Coupling, Sizes: 1.5 to 2.5 NST or IPT male or female.*

Complete with one flange/Coupling, Sizes: 1.5 to 2.5 NST or IPT male or female.*

FEATURES:

- Self-supporting
- Closed top – Prevents contamination
- Lightweight
- Easily transportable
- Potable water (special order)

CAPACITY:

U.S. GAL.	IMP. GAL.	LITERS
150	125	570
300	250	1100
750	625	2800
1500	1250	5600

* 3/4" GHT available with shut off valve on each model

DBL-HI™ Stores water in remote areas



- Forest Fire Fighting
- Helicopter dip tanks
- Temporary decon storage
- Other special applications

Specifications

- 5' / 1.5M high – For Helicopter Buckets
- Portable – Two men assembly – 20 minutes
- Liners, 22 oz. and 28 oz.
- Four steel frame sides – easy storage
- Includes two 4" NPT flanges with plugs

COLORS:

- Red 22 oz.
- Yellow 22 oz.
- Orange 22 oz. & 28 oz.
- Blue 22 oz.
- Black 22 oz. & 28 oz.
- Green 22 oz.


PART NO.	US GAL	SIZE		DIMENSIONS INCHES / CM	WEIGHTS		
		IMP GAL	LITER		Complete Unit LBS / KG	Liner LBS / KG	
DBLH-2000	2000	1650	7500	90" X 90" x 60" / 230 x 230 x 152	444 / 202	56 / 25	
DBLH-3000	3000	2500	11300	108" X 108" x 60" / 275 x 275 x 152	536 / 244	66 / 30	
DBLL – LINER ONLY							
DBLF – FRAME ONLY							

DECONTAMINATION POOL

Construction Features

- Sets up in seconds
- No assembly required
- Keeps contaminated liquids contained
- Place decon showers inside pool
- 3/4" GHT brass shutoff outlet
- Frame is resistance welded 7/8" steel
- Heavy duty PVC liner
- Optional fabrics 30 oz. PVC, XR-5


PART NO.	SIZE			DIMENSIONS FEET-INCHES / METERS	APPROX. SHIP WT. LBS / KG
	US GAL	IMP GAL	LITER		
HMT-180	180	150	700	4' X 4' x 18" / 1.2 x 1.2 x .46	65 / 30
HMT-300	300	250	1100	5' X 5' x 18" / 1.5 x 1.5 x .46	80 / 36
HMT-360	360	300	1300	4' X 8' x 18" / 1.2 x 2.4 x .46	85 / 38
HMT-540	540	450	2000	4' X 12' x 18" / 1.2 x 3.7 x .46	90 / 41
HMT-810	810	675	3000	6' X 12' x 18" / 1.8 x 3.7 x .46	105 / 48
HMTL – LINER ONLY					
HMTF – FRAME ONLY					

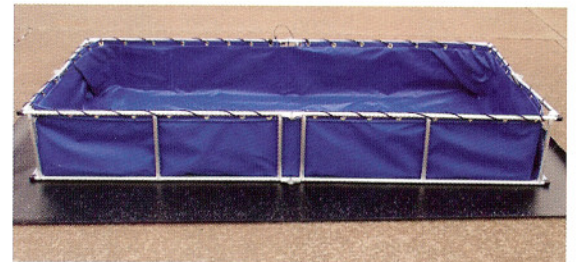

Aluminum Frame shown

*SPECIAL SIZES AVAILABLE UPON REQUEST
• Steel or Aluminum Frame available

RISER FOR FLOATING STRAINER

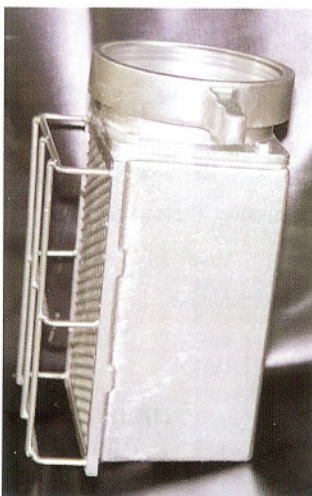

PART NO. FDSAR

SIZES 4" TO 6"

Ideal for use in Fol-Da-Tanks®

- Sits on tank bottom without damage to liner
- Made from lightweight Aluminum

CLAPPER VALVE



Shown on 6" L.F.

Sizes available 1-1/2"– 6"

This valve is specifically designed to maintain the prime between a pumper and a low level or floating strainer. When pumping through this valve the GPM's will not be lowered.

Construction features include:

- 6061T6 aluminum tubing
- 356 cast aluminum male & female couplings

Pump pond water free of debris with Float Dock® strainer

“The Original” Float Dock strainer is a valuable piece of equipment that can save the day in many firefighting situations. Float Dock lets you use the water in farm ponds or streams, both shallow and deep, and with Fol-Da-Tank. Because it operates below scum and debris and above sand and muck, it screens out the materials that wear out impellers, packing and bearings. Since Float Dock strainers are self-leveling, there are no whirlpools or suction loss. Each unit is fully guaranteed.




Float Dock drafts in as little as 5" / 13cm of water at pump's rated capacity.

- In deep water, Float Dock drafts clean water below surface
- In less than 30 seconds, strainer can be removed for use in cisterns
- Use as a "Box Strainer"

Accessory for Strainers

Lightweight carrying rack can be mounted on a running board or inside a compartment. There are two sizes. Small is for 2-1/2", and 3" Float Dock strainers and all Low-Flow strainers. Large is for 4", 4-1/2", 5", and 6" Float Dock strainers and low-flow strainers.



- | | |
|-----------------|-----------------|
| PART NO. | PART NO. |
| FDSCR-Small | LFSCR-Small |
| FDSCR-Large | LFSCR-Large |

Construction Features

- New lightweight materials
- Made of aluminum and polyethylene
- Lightweight long handle coupling with standard N.S. or I.P. threads
- Valve available
- Clapper & camlocks available


PART NO. FDSB

PART NO. FDSF




Barrel only (aluminum)

Float only (polyethylene)

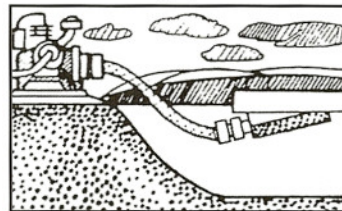


DEEP DRAFT - Strainer drafts from a few inches below surface where water is cleanest. Note how hose weight tilts strainer position while float remains level.

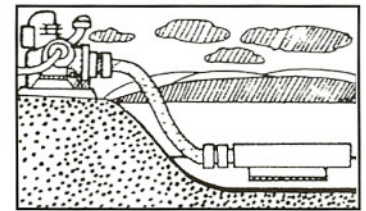

SHALLOW DRAFT - Note how FLOAT DOCK drafts in as little as 5" / 13cm depth without any whirlpool or loss of suction.

PART NO.	SIZES INCHES / CM	FLOAT ONLY INCHES/CENTIMETERS		STRAINER ONLY INCHES/CENTIMETERS		SHIP WTS. LBS. / KG
FDS2.5	2-1/2" / 6cm	5" x 15" x 18-1/2"	13 x 38 x 47	4" x 6" x 14"	10 x 15 x 36	16 / 7
FDS3	3" / 8cm	5" x 15" x 18-1/2"	13 x 38 x 47	4" x 6" x 14"	10 x 15 x 36	16 / 7
FDS4	4" / 10cm	7" x 21" x 30"	18 x 53 x 67	7" x 10" x 18-1/2"	18 x 25 x 47	31 / 14
FDS4.5	4-1/2" / 11cm	7" x 21-1/2" x 30"	18 x 55 x 67	6" x 8" x 18-1/2"	15 x 20 x 47	32 / 15
FDS5	5" / 13cm	7" x 21-1/2" x 30"	18 x 55 x 67	6" x 8" x 18-1/2"	15 x 20 x 47	32 / 15
FDS6	6" / 15cm	7" x 21-1/2" x 30"	18 x 55 x 67	7" x 16" x 18-1/2"	18 x 41 x 47	33 / 15

Fol-Da-Tank Drafting

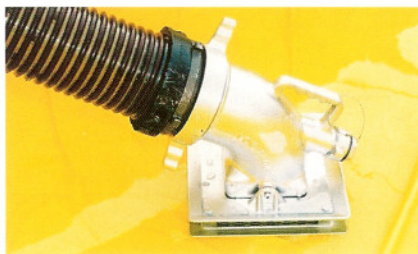

The New Design Low-Flow

CARRY RACK FOR LOW-FLOW STRAINER IS SMALL CARRY RACK, SEE ABOVE.

*Storz available in selected sizes
*Camlocks available in selected sizes

Aluminum "Low-Flow"

Construction Features

- Cast Aluminum
- Lightweight coupling with standard N.S. threads
- 1.5" Water Transfer Device – Optional Available on sizes 4" to 6"
- Clapper Valve – Optional Available in sizes 1.5" to 6"

Strainer will perform at maximum pumping capacity down to a water level of just 1-1/2" with no suction loss.

Surface turbulence will not affect this strainer.

The Low-Flow is easily stored in truck compartments, or it can be preattached to a hard suction hose.

Low-Flow Strainer

PART NO.	SIZES INCHES / CM		SHIP WTS. LBS. / KG
LFS2.5	2-1/2" / 6cm	10" x 10" x 8-1/2" / 25 x 25 x 22	7 / 3
LFS3	3" / 8cm	10" x 10" x 8-1/2" / 25 x 25 x 22	8 / 4
LFS4	4" / 10cm	16" x 13" x 12" / 41 x 33 x 31	23 / 11
LFS4.5	4-1/2" / 11cm	16" x 13" x 12" / 41 x 33 x 31	23 / 10
LFS5	5" / 13cm	16" x 13" x 12" / 41 x 33 x 31	24 / 11
LFS6	6" / 15cm	16" x 13" x 12" / 41 x 33 x 31	24 / 11

Salvage Cover



- Strong, lightweight 10 oz. Red, Yellow Green, Blue or Black vinyl coated Fortrel polyester
 - Certified Flame Retardant
 - 18 oz. Vinyl offered in Red, Yellow, Green, Blue or Black
 - 12 oz. Canvas (Olive Drab Only)
 - 22 oz. Hypalon (Red or Yellow)
 - 22 oz. Vinyl (Red or Yellow)
 - 30 oz. Vinyl (Orange)
 - CUSTOM SIZES — SPECIAL ORDER
 - Debris Bags
- | PART NO. | STANDARD SIZES |
|-----------|------------------------|
| SC9 x 12 | 9' x 12' / 2.7 x 3.7M |
| SC12 x 14 | 12' x 14' / 3.7 x 4.3M |
| SC12 x 18 | 12' x 18' / 3.7 x 5.5M |
| SC14 x 18 | 14' x 18' / 4.3 x 5.5M |
| DB6 x 8 | 6' x 8' / 1.8 x 2.4M |

The "Connector"™



Shown with bar sleeve clamp

Connect Two (or more) Fol-Da-Tanks together

- No priming necessary
- Equalizes water levels
- Easily stored
- Rugged aluminum castings
- 10" Standard Size

PART NO.	SIZE
PTCS-10	10" / 25cm


Bar Sleeve Clamp

- Controls water flow between tanks




PART NO. BSLC

SMOKE EJECTOR HOLDER With Hooks Included

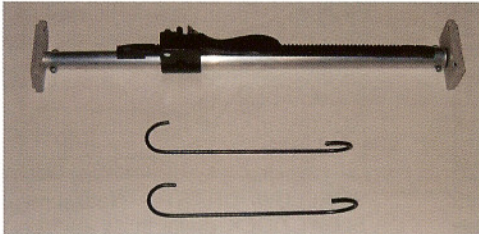

PART NO. SEH

- For doorway or window
 - Quick adjusting (28" to 40" / 71 to 101cm)
 - Rapid placement
 - Lightweight (6 lbs / 2.72 KG)
- Made from high tensile alloy for maximum strength. Locking action permits adequate pressure to secure the smoke ejector against door jambs or window frames. Rubber cushion and pads remain pliable down to -40°F.

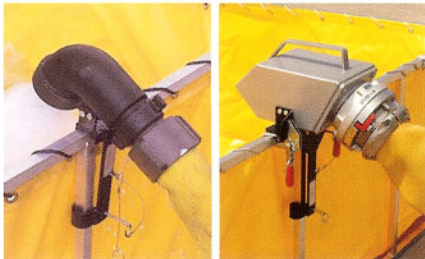

2-1/2" NST shown 5" STORZ shown

- Sizes: 2-1/2", 3" & 4"
Dbl. 2-1/2" & Dbl. 3"
2-1/2" & 3" combination
Storz and Cam Locks available

PART NO.	SIZES INCHES / CM
SLHS-2.5	2-1/2" / 6cm
SLHS-3	3" / 8cm
SLHS-4	4" / 10cm
SLHS-5	5" / 13cm
SLHD-2.5 (Dbl.)	2-1/2" / 6cm
SLHD-3 (Dbl.)	3" / 8cm
SLHD-2.5 / 3	2-1/2"-3" / 6-8cm

SUPPLY LINE HOLDER

Couples supply hose securely to **any** portable water tank

- Added filling source
- Minimizes waste and turbulence
- Frees up manpower for other important duties
- Aluminum casting
- Single (SLHS) rated at 200 psi at pump
- Double (SLHD) rated at 400 psi at pump
- Corner mounts available

Ground Cover for Fol-Da-Tanks® and Self-Supporting Tanks



Protects tank bottoms from excessive wear, abrasion and punctures. Tank life is increased. Stays cleaner. Heavy duty 22 oz. red or yellow Hypalon, 22 oz. Vinyl red or yellow or 30 oz. Orange Vinyl. All seams heat sealed for longer life. Available in the same sizes as all Fol-Da-Tanks and Self-Supporting tanks.

ALL GROUND COVERS SHIP VIA U.P.S.

FOL-DA-TANK® GROUND COVER

PART NO.	SIZES	Feet	Meters	PART NO.	SIZES	Feet	Meters
FDTC-600	600	6'3" x 6'3"	2 x 2	FDTC-3000	3000	13'3" x 13'3"	4 x 4
FDTC-1000	1000	8'3" x 8'3"	2.5 x 2.5	FDTC-3500	3500	14'3" x 14'3"	4.3 x 4.3
FDTC-1500	1500	10'3" x 10'3"	3 x 3	FDTC-4000	4000	15' x 15'	4.6 x 4.6
FDTC-2100	2100	11'3" x 11'3"	3.4 x 3.4	FDTC-5000	5000	17' x 20'	5.2 x 6
FDTC-2500	2500	12'3" x 12'3"	3.7 x 3.7				

SELF-SUPPORTING TANK GROUND COVER

PART NO.	SIZES	Feet	Meters	PART NO.	SIZES	Feet	Meters
SSTC-500	500	6'6" x 6'6"	2 x 2	SSTC-2500	2500	13'6" x 13'6"	4 x 4
SSTC-1000/1200	1000/1200	8'10" x 8'10"	2.7 x 2.7	SSTC-3000	3000	14'9" x 14'9"	4.5 x 4.5
SSTC-1500/1600	1500/1600	11'10" x 11'10"	3.6 x 3.6	SSTC-4000	4000	16' x 16'	4.8 x 4.8
SSTC-1800/2000	2100/2000	12'5" x 12'5"	3.8 x 3.8	SSTC-5000	5000	19' x 19'	5.8 x 5.8

Copyright 2007 FOL-DA-TANK COMPANY®

FOL-DA-TANK CO.®
P.O. Box 110
Milan, IL 61264
Tel: (309) 787-3500
(800) 637-TANK (8265)
FAX: (309) 787-3635
E-mail: info@fol-da-tank.com
Website: www.fol-da-tank.com

WARRANTY POLICY: We warranty FOL-DA-TANK Co. products to meet generally recognized standards of quality and excellence in the trade for goods of their type and kind. Should workmanship or materials prove defective by such standards within 1 year from the date of purchase by the user, replacement parts or repairs will be furnished without charge where our investigation shows the goods were defective when shipped, provided written notice has been given us immediately upon discovery of such a defect. We reserve the right of requiring the return of defective parts or tanks, transportation and insurance prepaid, before any claim is recognized. Misuse or abuse will automatically void this warranty.