STREAMLIGHT

Heroes Trust Streamlight®

FIRE MARKET

SL

2016

WHY HEROES TRUST STREAMLIGHT.

It all comes down to performance. Period.

People who depend on their flashlights – often for their lives – need to be able to count on that flashlight to work. Every time. When it's freezing cold, scorching hot, desert dry, or rainforest humid. When it's been beat up, abused, dropped in water, or left in icy snow.

They need to know that their flashlight will deliver the light they need for the task at hand. Whether it's lighting up a whole room, throwing a beam way down a path or up to the sky, or reading a map without being seen.

When size and run time are also part of the performance, our customers know they can trust Streamlight ... to shine brighter, work better, and last longer.

BEHIND THE PERFORMANCE

A lot goes into bringing you lights that deliver this kind of performance. It begins with talking to customers and learning what they need. Understanding how lights are used in different situations leads to innovative designs and game-changing technologies. And when we think we've met the challenge with a new light, we put it through the toughest tests in the industry to make sure it will perform as needed.

Your life may not depend on the performance of your flashlight, but when you need a light, you need it to work, and you need it to make you safer and more productive. So whether you're in combat, on the beat, putting out fires, installing plumbing, working on utilities, camping in the woods, fixing an engine, tracking a lost child, or just lighting your home in a power failure, you can trust Streamlight.
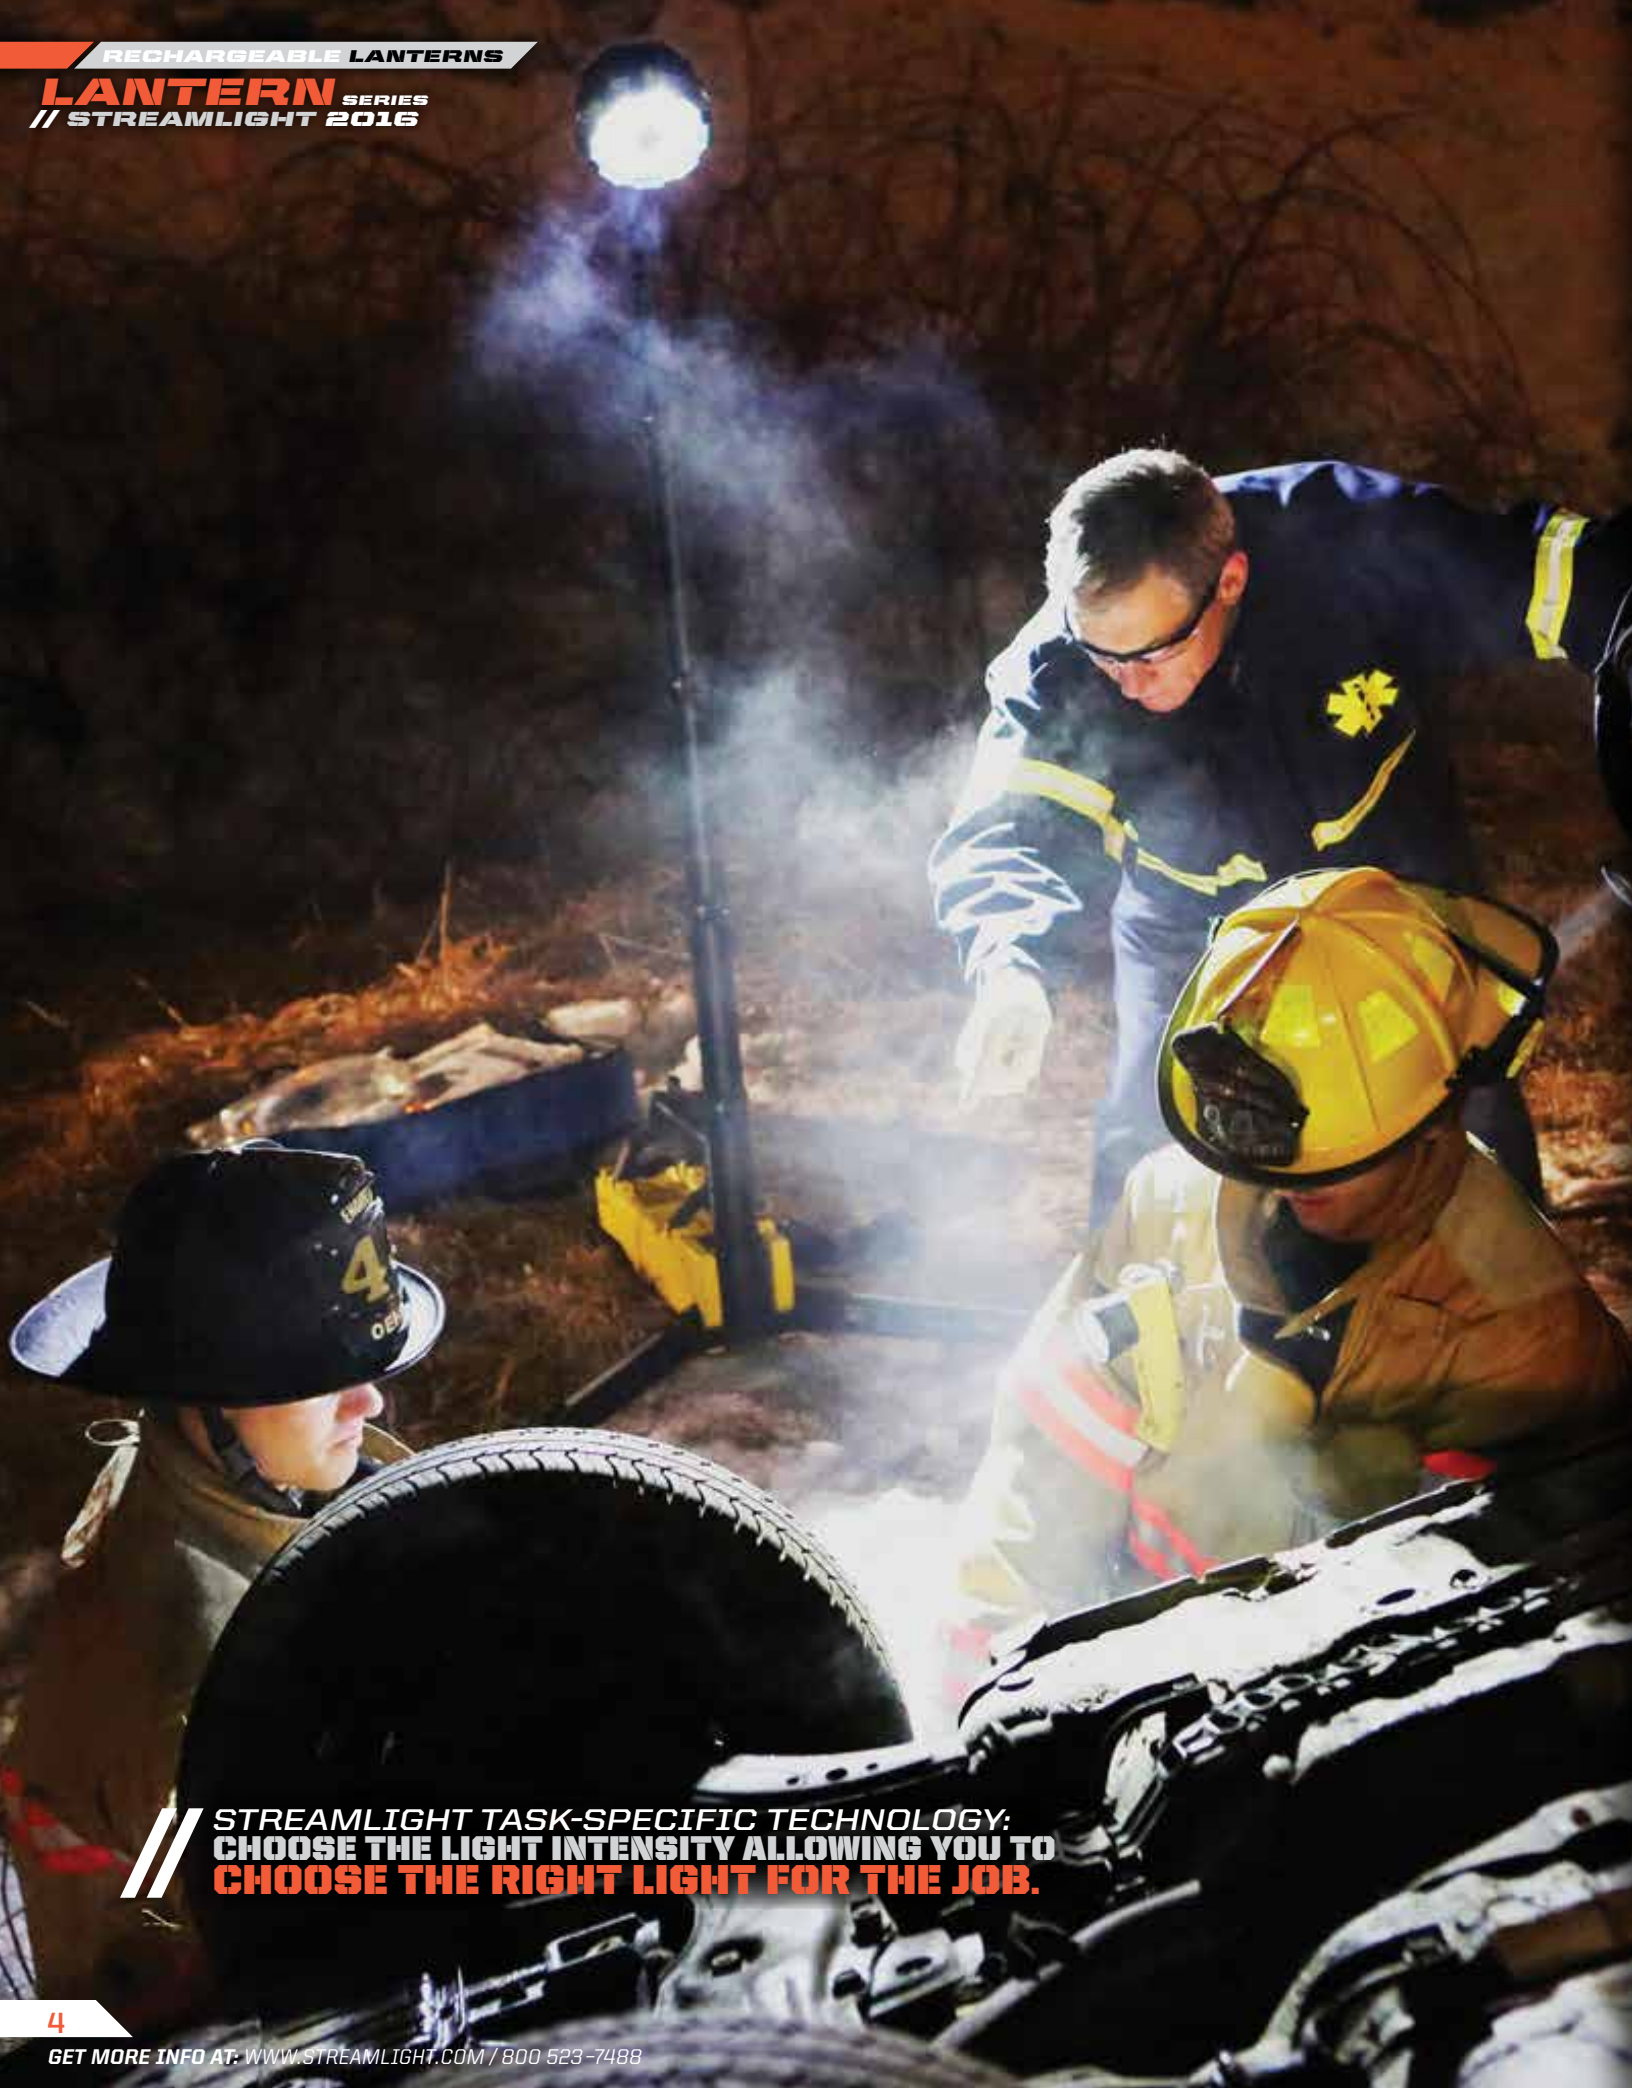
![STREAMLIGHT]

TABLE OF CONTENTS

STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
**CHOOSE THE RIGHT LIGHT FOR THE JOB.**

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT BASED ON THE FEATURES THAT YOU NEED!

BEAM STYLE

SPECS

HIGH MODE PERFORMANCE SHOWN. FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.

PORTABLE SCENE LIGHT

OUTPUT: 5,300 lumens
BEAM DISTANCE: 410 meters
RUN TIME: 4 hours
SIZE: 22" x 6.5" x 11"
(55.88 x 16.5 x 27.9 cm)
WEIGHT: 25 lb (11.3 kg)
**COLOR:** Yellow

E-FLOOD® LITEBOX® HL™

OUTPUT: 3,600 lumens
INTENSITY: 31,000 candela
BEAM DISTANCE: 352 meters
RUN TIME: 2 hours
SIZE: 12.3" x 5.1" x 7.7"
(31 x 13 x 19 cm)
WEIGHT: 10.4 lb (4.7 kg)
COLOR: Orange

HL SERIES

HID LITEBOX®

OUTPUT: 3,350 lumens
INTENSITY: 1,000,000 candela
BEAM DISTANCE: 2,000 meters
RUN TIME: 1.75 hours
SIZE: 14.9" x 5.1" x 8.8"
(38 x 13 x 23 cm)
WEIGHT: 10 lbs 1.6 oz (4.6 kg)
COLOR: Orange or Black

E-FLOOD® LITEBOX®
E-FLOOD® FIREBOX®

OUTPUT: 615 lumens
INTENSITY: 4,000 candela
BEAM DISTANCE: 126 meters
RUN TIME: 8 hours
SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow, or Beige

E-SPOT® LITEBOX®
E-SPOT® FIREBOX®

OUTPUT: 540 lumens
INTENSITY: 55,000 candela
BEAM DISTANCE: 469 meters
RUN TIME: 7 hours
SIZE: 11.5" x 5.1" x 7"
(29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow, or Beige

FIRE VULCAN® LED

OUTPUT: 145 lumens
INTENSITY: 80,000 candela
BEAM DISTANCE: 566 meters
RUN TIME: 3 hours
SIZE: 7.5" x 5" x 6.5"
(19.05 x 12.7 x 16.51 cm)
WEIGHT: 1 lb 13.6 oz (839 g)
COLOR: Orange

PORTABLE SCENE LIGHT

The Portable Scene Light provides rapid deployment on site, and it goes anywhere. It features a 90° swivel neck that makes it easy to shine light into the most out-of-the-way places. The head, mounted on a telescoping pole, extends to 72" within seconds. It provides three levels of lighting and substantial run time to last through several shifts. Its unique diffuser lets you select a flood or spot beam in all three levels. Designed to adapt to tight spaces, it's also rugged enough to withstand rough terrain. Regulated light provides consistent output in between charges. Use it to light the way to your work site and set it up quickly to illuminate the entire area. It's an indispensable tool for first responders, construction crews, and utility workers.

PORTABLE SCENE LIGHT

BATTERY: Zero-maintenance 12V, 14.4 Ah sealed lead acid. Can also be powered by 12V DC power cord.

SIZE: 22" x 6.5" x 11"
(55.88 x 16.5 x 27.9 cm)

WEIGHT: 25 lb (11.3 kg)

COLOR: Yellow

PORTABLE SCENE LIGHT	
45670	120V AC/12V DC Portable Scene Light—Yellow
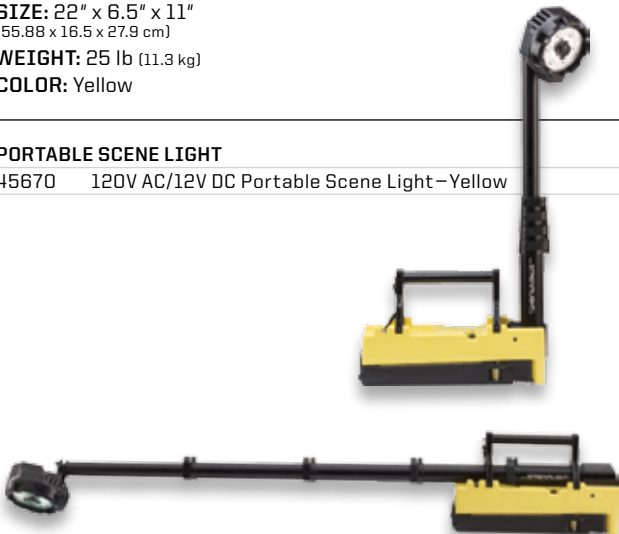
	HIGH	MEDIUM	LOW
LUMENS:	5,300	2,500	1,300
DISTANCE:	410m	292m	215m
RUN TIME:	4h	9h	18h

Full extension to 72" with the stabilization legs fully deployed and locked in less than 30 seconds

Cord is built into the pole to avoid snags during deployment

Balanced design; lead acid batteries provide ballast and stability

Special Features:
- Full deployment in 30 seconds
- Pole extends to 72"; designed to resist 40mph wind continuous in all directions with head fully extended
- Unlimited run time using AC/DC power source
- IP67 rated; dust-tight and waterproof to 1 meter for 30 minutes
- Stabilization legs provide balance on uneven surfaces

LIGHT UP
THE WORLD
ANYWHERE
YOU WANT.

E-FLOOD® LITEBOX® HL™

The E-Flood LiteBox HL produces 3,600 lumens to flood an entire area with light. An integrated diffuser lets you select from a flood and spot lens in three lighting modes and a 90° swivel neck lets you aim light where it's needed. It's ideal for illuminating a rescue scene, an entire plant floor or any site that requires a large flood beam. The portability and full illumination is perfect for underground construction.

E-FLOOD LITEBOX HL
BATTERY: Zero-maintenance 12V, 14.4 Ah sealed lead acid
SIZE: 12.3" x 5.1" x 7.7" (31 x 13 x 19 cm)
WEIGHT: 10.4 lb (4.7 kg)
COLOR: Orange

E-FLOOD HL LITEBOX
45661	120V AC/12V DC, shoulder strap & mounting rack - Orange
45665	Vehicle Mount System, 12V DC direct wire rack, shoulder strap - Orange
45660	without Charger - Orange

HL SERIES

	HIGH	MEDIUM	LOW
LUMENS:	3,600	2,400	1,200
CANDELA:	31,000	20,000	11,000
DISTANCE:	352m	283m	210m
RUN TIME:	2h	4h	8h

NFPA
Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

Special Features:
- Six super-bright C4® LEDs
- Unlimited run time using DC power source
- Unbreakable, scratch-resistant, O-ring sealed lens.
- Provides regulated light output throughout battery life.

THE HID LITEBOX:
THE POWER
TO LIGHT AN
ENTIRE SCENE.

HID LITEBOX®

This portable, one million candela searchlight illuminates objects up to a mile away. It features a 35-watt, high intensity xenon lamp with a 3,000-hour minimum lifetime and a 90° swivel head. The intense brightness and amazing 1-mile reach make this the ideal hand-held light when you need to inspect an entire area quickly and efficiently. It plugs into your vehicle's power source for an unlimited run time.

HID LITEBOX
BATTERY: Zero-maintenance 12V, 7.2 Ah sealed lead acid
SIZE: 14.9" x 5.1" x 8.8" (38 x 13 x 23 cm)
WEIGHT: 10 lbs 1.6 oz (4.6 kg)
COLOR: Orange or Black

ORANGE	BLACK	
45601	45621	with 120V AC/12V DC
45600	45620	without Charger
45605	45625	Vehicle Mount System with 12V DC

|	
LUMENS:	3,350
CANDELA:	1,000,000
RUN TIME:	1h 45m

Swivel neck shown in 90° position.

10 ft (3 meters) 12V DC power cord plugs into port at rear of light to provide duration lighting

HID LiteBox battery will continue to charge while operating directly from an external 12V DC power source when using the remote cord

Swivel neck shown in 45° position.

THE E-FLOOD & E-SPOT SERIES ARE ABOUT
DELIVERING
THE RIGHT LIGHT
EXACTLY WHERE
YOU NEED IT.

E-FLOOD® LITEBOX®
E-FLOOD® FIREBOX®

	HIGH	LOW
LUMENS:	615	330
CANDELA:	4,000	2,150
DISTANCE:	126m	93m
RUN TIME:	8h	18h

The Power Failure System features "Smart" power failure circuitry which automatically illuminates the light when the power goes off

NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

E-Flood FireBox includes dual rear LEDs.

Six C4® LEDs spread light over an entire area. It has an extended run time – 18 hrs. on low – so you can keep large areas illuminated no matter how long your shift lasts. With its swivel head, you can point light right where it's needed. The FireBox has two rear blue LEDs so you can be seen from behind: a life-saving feature for firefighters!

E-FLOOD LITEBOX / E-FLOOD FIREBOX
BATTERY: Zero-maintenance 6V, 12 Ah sealed lead acid
SIZE: 11.5" x 5.1" x 7" (29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow or Beige (Power Failure model only)

E-FLOOD LITEBOX
45801	120V AC/12V DC, shoulder strap and mounting rack—Orange
45821	120V AC/12V DC, shoulder strap and mounting rack—Yellow
45805	Vehicle Mount System with 12V DC, shoulder strap—Orange
45825	Vehicle Mount System with 12V DC, shoulder strap—Yellow
45807	Power Failure w/120V AC/12V DC Chargers, mounting rack—Orange
45817	Power Failure w/120V AC/12V DC Chargers, mounting rack—Beige
45806	without Charger—Orange
45816	without Charger—Beige (Power Failure)
45826	without Charger—Yellow

E-FLOOD FIREBOX
45811	120V AC/12V DC, dual rear LEDs, strap, mounting rack—Orange
45815	Vehicle Mount System w/DC, dual rear LEDs, shoulder strap—Orange
45832	without Charger—dual rear LEDs—Orange

E-SPOT® LITEBOX®
E-SPOT® FIREBOX®

	HIGH	LOW
LUMENS:	540	330
CANDELA:	55,000	32,000
DISTANCE:	469m	358m
RUN TIME:	7h	15h

Power Failure System

E-Spot FireBox includes dual rear LEDs.

NFPA

Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

Three C4® LEDs spotlight an area with focused bright light so you can search or inspect from a distance. Its beam has more of a hotspot than the E-Flood, providing more concentrated, brighter light. Its swivel head makes it easy to inspect high bays, ceilings, and out-of-the-way places. IPX4-rated for water-resistance. Optimized electronics provide regulated intensity. Unbreakable, scratch-resistant lens.

E-SPOT LITEBOX / E-SPOT FIREBOX
BATTERY: Zero-maintenance 6V, 12 Ah sealed lead acid
SIZE: 11.5" x 5.1" x 7" (29.2 x 13 x 17.8 cm)
WEIGHT: 7 lbs 14.4 oz (3.58 kg)
COLOR: Orange, Yellow or Beige (Power Failure model only)

E-SPOT LITEBOX
45851	120V AC/12V DC, shoulder strap and mounting rack—Orange
45871	120V AC/12V DC, shoulder strap and mounting rack—Yellow
45855	Vehicle Mount System with 12V DC, shoulder strap—Orange
45875	Vehicle Mount System with 12V DC, shoulder strap—Yellow
45857	Power Failure System, shoulder strap and mounting rack—Orange
45867	Power Failure System, shoulder strap and mounting rack—Beige
45856	without Charger- with shoulder strap—Orange
45866	without Charger- with shoulder strap—Beige (Power Failure)
45876	without Charger and shoulder strap—Yellow

E-SPOT FIREBOX
45861	120V AC/12V DC, dual rear LEDs, strap, mounting rack—Orange
45865	Vehicle Mount System w/DC, dual rear LEDs, shoulder strap—Orange
45882	without Charger—dual rear LEDs—Orange

FIRE VULCAN® LED

This lightweight lantern features two ultra-bright blue taillight LEDs that help you be seen even in thick smoke. It is IPX7 rated - waterproof to 1m for 30 minutes, and it floats! Programmable light functions let you control the order in which the modes come on. Other features include an unbreakable, scratch-resistant, O-ring sealed lens and a quick-release shoulder strap.

FIRE VULCAN LED
BATTERY: 2 lightweight Lithium-ion nanotechnology cells
SIZE: 7.5" x 5" x 6.5"
(19.05 x 12.7 x 16.51 cm)
WEIGHT: 1 lb 13.6 oz (839 g)
COLOR: Orange

44450	Standard System with 120V AC/12V DC—Orange
44451	Vehicle Mount with 12V DC—Orange
44454	without Charger—Orange

Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G;
Class III T-Code: T4

NFPA
Rack meets requirements of NFPA 1901-14.1.11.2 (2003) mounted in any position

	HIGH	LOW
LUMENS:	145	70
CANDELA:	80,000	40,000
RUN TIME:	3h	7h

C4 LED®

Ultra-bright blue tail light LEDs make certain you can be seen, even in thick smoke.

TWO FIRE VULCAN LED MODELS:

Standard System: Includes charging rack and both AC and DC chargers.
Vehicle Mount System: Includes 12V DC vehicle-mountable, direct-wire charging rack.

Accessory	Part #	Goes With
Standard Mounting Rack—Orange Vehicle Mounting Rack—Orange	45070 45071	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox
Standard Mounting Rack—Yellow Vehicle Mounting Rack—Yellow	45072 45074	E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox
Standard Mounting Rack—Beige	45073	E-Flood LiteBox, E-Spot LiteBox Power Failure Systems
Standard Mounting Rack—Black Vehicle Mounting Rack—Black	45075 45076	HID LiteBox
Standard Charge Rack - Orange Direct Wire 12V DC Charge Rack - Orange	44101 44131	Fire Vulcan LED
12V DC (CIG) Charge Cord	22051	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED
12V DC Charge Cord	22050	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED
120V AC Charge Cord	22311	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED
IEC Type A (120V) Charge Cord	22060	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED
Battery (Sealed Lead Acid)	45630	Portable Scene light, E-Flood LiteBox HL, HID LiteBox
Battery (Sealed Lead Acid)	45937	E-Flood LiteBox, E-Spot LiteBox
Battery (Lithium Ion)	44610	Fire Vulcan LED
HID Bulb Kit	45637	HID LiteBox
Flood Lens	45657	HID LiteBox
IR Filter	45654	HID LiteBox
E-Spot Upgrade Kit	45845	E-Spot LiteBox/FireBox
E-Flood Upgrade Kit	45842	E-Flood LiteBox/FireBox
Quick Release Strap Shoulder Strap	44050 45232	E-Flood LiteBox HL, E-Flood LiteBox/FireBox, E-Spot LiteBox/FireBox, HID LiteBox, Fire Vulcan LED

WAYPOINT ®

Trigger style switch with momentary operation.

This long-distance, pistol-grip lantern is the light you need to inspect a power line from the ground, find a dock from the interior of a lake or see what is way up ahead. Its beam reach is about the length of 6 football fields! It also has plenty of peripheral light, so you can see what's all around you. Set it down to illuminate an area or aim it to check on trees or power lines far away. This alkaline lantern features high, low and emergency signal modes.

WAYPOINT
BATTERY: 4 "C" batteries (not included).
Can also be powered by 12V DC power cord (included)
SIZE: 6.75" x 7.14" x 3.5"
(17.15 x 18.14 x 8.89 cm)
WEIGHT: 1 lb 12.8 oz (816 g)
COLOR: Yellow or Black

YELLOW	BLACK	
44900	44902	12V DC power cord*– w/polymer storage mount
44904	44905	12V DC power cord*
ACCESSORIES		
44908	44908	Polymer Storage Mount
44903	44903	12V DC power cord
44924	44924	Red Filter
44925	44925	Green Filter
*12V DC power cord does not recharge batteries		

C4 LED ®

	HIGH	LOW
LUMENS:	550	40
CANDELA:	100,000	7,900
DISTANCE:	625m	178m
RUN TIME:	10h	82h

Unlimited run time when using 12V DC power cord.
Emergency signal run time 120 hours.

Green Filter reduces shadows.

Red Filter preserves night vision.

Special Features:
- Unbreakable, O-ring sealed polycarbonate lens.
- IPX4-rated for water-resistance.
- 1 meter impact-resistance tested.
- Integrated stand for hands-free scene lighting.

WAYPOINT RECHARGEABLE...
5 FEET OF CHARGING CORD
1,800 FEET
OF LIGHT.

WAYPOINT® RECHARGEABLE

The rechargeable model has a far-reaching, broad beam that spreads bright light across a whole room, campsite or backyard illuminating everything. IPX8 rated design waterproof to 2 meters. Light floats if dropped in water. It features high, medium and low modes, making it very veratile. An integrated stand allows you to set it up for easy area illumination. Fully recharges in 4 hours.

WAYPOINT RECHARGEABLE
BATTERY: Lithium Ion with on-board safety control circuit
SIZE: 6.75" x 7.14" x 3.62"
(17.15 x 18.14 x 9.29 cm)
WEIGHT: 1 lb 8.32 oz (691 g)
COLOR: Yellow or Black

YELLOW	BLACK	
44910	44911	with 120V AC charge cord
ACCESSORIES		
44918	44918	Waypoint Rechargeable Holder
44915	44915	Red Filter
44916	44916	Green Filter

	HIGH	MEDIUM	LOW
LUMENS:	1,000	550	35
CANDELA:	115,000	60,000	10,000
DISTANCE:	678m	490m	200m
RUN TIME:	3h	6h	80H

Red Filter preserves night vision.

Green Filter reduces shadows.

Includes 120V AC Charge Cord.

The Waypoint rechargeable holder allows for secure storage (included with product and also offered as an accessory).
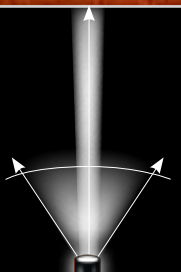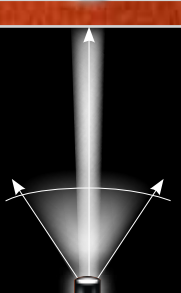
USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT BASED ON THE FEATURES THAT YOU NEED!

BEAM STYLE

SPECS — HIGH MODE PERFORMANCE SHOWN. FOR PERFORMANCE IN OTHER MODES, SEE MODEL PAGES.

SURVIVOR® RECHARGEABLE

OUTPUT: 175 lumens
INTENSITY: 41,000 candela
BEAM DISTANCE: 405 meters
RUN TIME: 3 hours 30 min
SIZE: 7.06" x 2.85" x 2.87" (17.92 x 7.24 x 7.29 cm)
WEIGHT: 18 oz (510 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

SURVIVOR® ALKALINE

OUTPUT: 175 lumens
INTENSITY: 41,000 candela
BEAM DISTANCE: 405 meters
RUN TIME: 4 hours
SIZE: 7.06" x 2.85" x 2.87" (17.92 x 7.24 x 7.29 cm)
WEIGHT: 13.7 oz (388 g)
COLOR: International Safety Orange, High-Visibility Yellow, or Black

KNUCKLEHEAD® FLOOD

OUTPUT: 200 lumens
INTENSITY: 1,150 candela
**BEAM DISTANCE:** 68 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: Yellow, Black or International Safety Orange

KNUCKLEHEAD® SPOT

OUTPUT: 180 lumens
INTENSITY: 11,000 candela
BEAM DISTANCE: 210 meters
RUN TIME: 3 hours 30 min
SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: International Safety Orange

VANTAGE®

OUTPUT: 115 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 6 hours
SIZE: 3.26" x 1.47" x 2.56" (8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Black, Green or Red

POLYTAC 90®

OUTPUT: 170 lumens
INTENSITY: 7,000 candela
BEAM DISTANCE: 167 meters
RUN TIME: 3 hours 45 min
SIZE: 5.22" x 1.25" x 1" (13.3 x 3.18 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Yellow, Black or International Safety Orange

SURVIVOR®

This leading Class I, Div. 1 right angle, clip-on flashlight features a slim profile and a D-ring for accurate light orientation. Four light modes include high, low, flash, and moonlight (for low-level lighting that runs for 20 days). Its spring-loaded clip easily attaches to belts and harnesses. Two interchangeable Smoke Cutter® plugs help create your preferred beam pattern: black plug significantly reduces peripheral light for a tighter beam; amber plug reduces peripheral light and eye fatigue caused by glare. Available in alkaline and rechargeable models.

All openings are O-ring sealed for weather-resistance. IPX4 water-resistant. 2m impact resistance tested. Unbreakable, scratch-resistant polycarbonate lens. Designed for easy operation even with heavy gloves.

SURVIVOR

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C or (4) "AA" Alkaline depending on model selected

SIZE: 7.6" x 2.85" x 2.87"
(17.92 x 7.24 x 7.29 cm)

NiCd WEIGHT: 18 oz (510 g)

ALKALINE WEIGHT: 13.7 oz (388 g)

COLOR: Orange, Yellow, or Black

YELLOW	ORANGE	BLACK	
90513	90503	90523	w/Charger/Holders 120V AC/DC cords
90512	90502	90522	with 120V AC Fast Charger
90519	90509	90528	with 12V DC Fast Charger
90510	90500	90520	without Charger
90541	90540	90545	Alkaline

Interchangeable Smoke Cutter® plugs:

Black reduces peripheral light for a tighter beam

Amber reduces peripheral light and eye fatigue caused by glare

THE MOST TRUSTED RIGHT ANGLE LIGHT
THIN, BRIGHT &
EXTREMELY VERSATILE.
THE SURVIVOR.

Strong spring-loaded clip securely grabs onto belts and gear; D-ring features forward hanging orientation

C4 LED

HAZ-LO DIVISION 1 LIGHTING

NiCD MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	3h 30m	13h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

ALKALINE MODEL	HIGH	LOW
LUMENS:	175	60
CANDELA:	41,000	14,000
DISTANCE:	405m	237m
RUN TIME:	4h	15h

Moonlight mode: 20 days of continuous run time
Flash runs 8 hours

SGS Class I & II, Division 1, Groups C,D,E,F,G;
Class III, T4
Class I, Division 2, Groups A,B,C,D; T4

NFPA Rack meets requirements of
1901-14.1.11.2 (2003)
mounted in any position

MSHA Permissible Flashlight,
Approval No. 20-A150001-0
(Alkaline model)

WHETHER YOU'RE WORKING ON THE FLOOR
OR OVERHEAD, THE
KNUCKLEHEAD
IS YOUR PARTNER.

STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
CHOOSE THE RIGHT LIGHT FOR THE JOB.

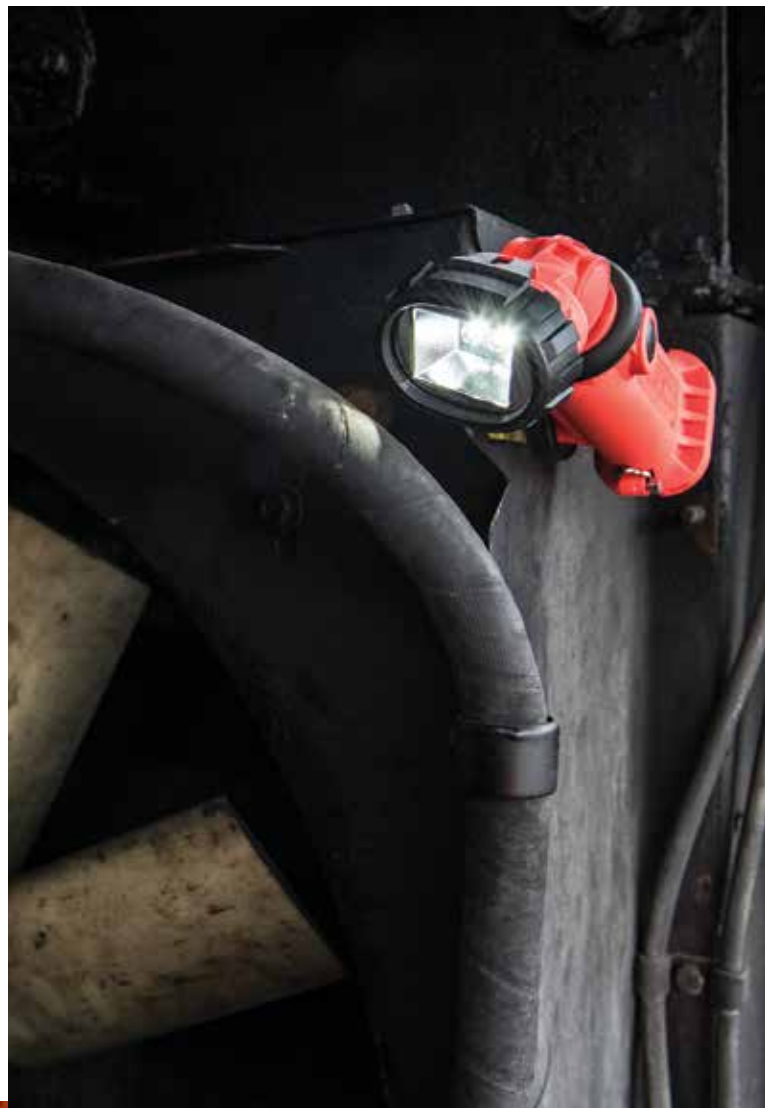**AIM IT ANYWHERE //**
WITH AN ARTICULATING HEAD.

ATTACH IT TO STEEL //
WITH ITS MAGNET.

CLIP IT ANYWHERE //
WITH A SPRING-LOADED
CLIP. (ORANGE MODEL.)

HANG IT ANYWHERE //
WITH AN INTEGRATED
STOWABLE HOOK. (YELLOW & BLACK MODELS.)

18

	HIGH	LOW
LUMENS:	200	63
CANDELA:	1,150	350
DISTANCE:	68m	37m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time

Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III   T4

NFPA
Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position

A lightweight, rechargeable, hand-held work light that hangs/attaches in a variety of ways to flood your entire work area with light. A soft, even light pattern is easy on your eyes. It features an articulating head that articulates 210° and rotates 360°, making it easy to aim light where it's needed. A removable, super-strong magnet grabs onto steel surfaces for hands-free use. Other features include: unbreakable, anti-scratch, O-ring sealed lens; IPX4-rated for water-resistance; all opening are O-ring sealed; 2m impact-resistance tested.

KNUCKLEHEAD FLOOD

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C; optional 4 "AA" alkaline non-rechargeable battery cartridge.
SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: Orange, Yellow, or Black

YELLOW	ORANGE	BLACK	
90627	90657	90607	Charger/Holder and 120V AC & 12V DC cords
90622	–	90602	120V AC Charger/Holder
90626	–	90606	12V DC
90633	–	90613	120V AC/DC PiggyBack® Charger
90631	90661	90611	120V AC Fast Charger
90640	90670	90620	12V DC Fast Charger
90621	90651	90601	without Charger
90642	90644	90641	Alkaline Model

Orange model features a spring-loaded clip; Black & Yellow models feature and integrated hang hook

	HIGH	LOW
LUMENS:	180	55
CANDELA:	11,000	3,300
DISTANCE:	210m	115m
RUN TIME:	3h 30m	16h

Moonlight mode: 20 days of continuous run time
Flash: 8 hours continuous time

Spring-loaded clip attaches to turn-out gear for convenient hands-free lighting.

Class I, Div. 2, Grps A, B, C, D,
Class II, Div. 2, Grps F, G
Class III   T3C

NFPA
Rack meets requirements
of 1901-14.1.11.2 (2009)
mounted in any position

Powerful magnet adheres to steel surfaces.

Its far-reaching beam helps locate hazards or victims from a distance. The following features are designed to give firefighters added flexibility: Articulating, rotating head makes it easy to aim light where it's needed. Powerful, removable magnet adheres to steel surfaces. Spring-loaded clip grabs onto turnout gear. Four modes include high, low, flash and moonlight (for low-level lighting and a 20-day run time). Unbreakable, anti-scratch, O-ring sealed lens. IPX4-rated for water-resistance. 2m impact-resistance tested. All openings are O-ring sealed.

KNUCKLEHEAD SPOT

BATTERY: Rechargeable NiCd 4.8V, 1.8 Ah, 4-cell sub-C; optional 4 "AA" alkaline non-rechargeable battery cartridge.
SIZE: 9.2" x 2.85" x 2.75" (23.4 x 7.2 x 7 cm)
NiCd WEIGHT: 1 lb 7.1 oz (655 g)
ALKALINE WEIGHT: 1 lb 2.3 oz (519 g)
COLOR: Orange

90757	120V AC/12V DC - Orange
90761	120V AC Fast Charge - Orange
90770	12V DC Fast Charge - Orange
90751	Light Only (without charger) Orange
90744	Alkaline Model - Orange

POLYTAC 90®

Use this versatile, compact, right-angle flashlight as a headlamp or clip on to turn-out gear. It's super bright, and extremely durable with nylon polymer housing. Three modes include high, low and strobe. 1m impact resistance tested. IPX7 rated design; waterproof to 1 meter for 30 minutes. Integrated carabiner style D-ring for a variety of attachment methods. Versatile clip allows a variety of mounting positions. Maximum light output throughout battery life.

POLYTAC 90
BATTERY: (2) 3V CR123A Lithium batteries
SIZE: 5.22" x 1.25" x 1"
(13.3 x 3.18 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Black, Yellow or Orange

YELLOW	ORANGE	BLACK	
88831	88834	88830	with lithium batteries
–	88832	–	with lithium batteries & Gear Keeper

	HIGH	LOW
LUMENS:	170	17
CANDELA:	7,000	700
DISTANCE:	167m	53m
RUN TIME:	3h 45m	30h

Strobe runs 6 hours

Gear Keeper® Tether features spectra nylon line with 36" extension and 6 oz. retraction force.

Gear Keeper® makes your job easier while preventing loss of light.

VANTAGE®

The solution to firefighters' hands-free lighting needs. Attaches easily to helmets and hard hats, and rotates 360°. Fits snugly against helmet to prevent snags. Includes a bright taillight LED so you can be seen from behind even in heavy smoke. Easy to operate with gloves. Fits both traditional and modern helmets.

VANTAGE
BATTERY: (2) 3V CR123A lithium
SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Black

69140	Vantage Helmet Light – Black with blue taillight LED
69157	Vantage Helmet Light – Red with blue taillight LED
69189	Vantage Helmet Light – Green with green taillight LED
85175	Lithium Batteries – 2 Pack

NFPA Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test

CE Meets applicable European Community Directives

LUMENS:	115
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	6h

Dual direction, easy access on/off switch.

Utra-bright taillight LED.

STREAMLIGHT TECHNOLOGY: PRODUCT-SPECIFIC DESIGN ALLOWS YOU TO
TARGET THE BEAM.

MOUNTING VERSATILITY:

Clamp the Vantage onto any traditional or modern firefighter's helmet or hard hat. It rotates and can be clamped above or below the brim.

RIGHT ANGLE SERIES ACCESSORIES

| Accessory	Part #	Goes With
Steady Charger Plug-In Charger Holder AC Fast Charger Holder DC#1 Fast Charger Holder DC#2 Direct Wire Fast Charger Holder	90010 90011 90012 90113	Survivor, Knucklehead
Steady Charge PiggyBack® Charger Holder AC PiggyBack® Fast Charger Holder DC #1 PiggyBack® Fast Charger Holder	90110 90111 90112	Survivor, Knucklehead
120V AC Bank Charger 120V AC Bank Charger	90400 90401	Survivor, Knucklehead
12V DC (CIG) Charge Cord	22051	Survivor, Knucklehead
12V DC Charge Cord	22050	Survivor, Knucklehead
120V AC Charge Cord	22311	Survivor, Knucklehead
IEC Type A (120V) Charge Cord	22060	Survivor, Knucklehead
Battery Pack Assembly—LED Div. 1	90130	Survivor, Knucklehead
Battery Pack Assembly—LED Div. 2	90338	Knucklehead
Alkaline Battery Cartridge	90542	Survivor, Knucklehead
Gear Keeper	88833	PolyTac 90
Elastic Headstrap - Coyote	14059	PolyTac 90
CR123A Lithium Batteries - 2pk CR123A Lithium Batteries - 6pk CR123A Lithium Batteries - 12pk CR123A Lithium Batteries - 400pk	85175 85180 85177 85179	PolyTac 90, Vantage

3AA PROPOLYMER® DUALIE®

One light, two beams: Choose one spot beam or one flood light or both. The 3AA ProPolymer Dualie provides two types of illumination for multi-directional lighting and special uses. Intuitive activation allows you to use either beam or both at the same time. This intrinsically safe flashlight allows you to see your entire work area and helps you avoid slips, trips, and falls.

3AA PROPOLYMER DUALIE
BATTERY: 3 "AA" size alkaline or lithium batteries
SIZE: 7" x 1.86" x 1.06"
(17.78 x 3.86 x 2.69 cm)
WEIGHT: 6.8 oz (193 g)
COLOR: Yellow or Black

YELLOW	BLACK	
68750	68752	White LED/alkaline batteries
68751	68753	White LED/ without alkaline batteries. Boxed.

	SPOT	FLOOD
LUMENS:	140	140
CANDELA:	7,300	80
DISTANCE:	171m	18m
RUN TIME:	18h	18h

Features a forward facing LED spot beam and a side facing LED flood light that can be used individually or at the same time for enhanced safety.

Rugged, integrated, snag-free clip conforms to body of light; grabs onto shirts, pockets and gear for hands-free use.

Class I & II, Div. I, Groups A,B,C,D,F,G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia

3AA PROPOLYMER® DUALIE® LASER

The 3AA Propolymer Dualie Laser is an intrinsically safe, high performance, 3 AA battery powered dual function flashlight. It features a forward facing LED spot beam and a laser pointer that can be used individually or at the same time for location identification. Opposing switches for easy user activation of desired function(s).

3AA PROPOLYMER DUALIE LASER
BATTERY: 3 "AA" size alkaline or lithium batteries
SIZE: 7" x 1.86" x 1.06"
(17.78 x 3.86 x 2.69 cm)
WEIGHT: 6.8 oz (193 g)
COLOR: Yellow or Black

YELLOW	BLACK	
68760	68722	White LED/Laser/alkaline batteries

	LED	LASER
LUMENS:	150	<5mW output
CANDELA:	7,700	---
DISTANCE:	175m	---
RUN TIME:	17h	70h

Simultaneous spot beam and laser pointer allow you to illuminate your work area and pinpoint out-of-reach objects.

Class I & II, Div. I, Groups A,B,C,D,F,G
Class III, CL I, ZN O, IIC
T-Code: T4; Exia

READY FOR
HAZARDOUS DUTY.

4AA PROPOLYMER®LED

Its soft, diffused light is perfect for up-close work; and with 155 hours of run time, this safety-rated light is always ready. Features seven ultra-bright white LEDs. IP65-rated, waterproof, dust-resistant. Unbreakable, scratch-resistant lens.

4AA PROPOLYMER LED
BATTERY: 4 "AA" size alkaline
SIZE: 6.5" x 1.63" x 1.34"
(16.51 x 4.14 x 3.4 cm)
WEIGHT: 6.3 oz (178.6 g)
COLOR: Yellow or Black

YELLOW	BLACK	
68202	68302	White LEDs/alkaline batteries—Clam packaged
68201	68301	White LEDs/alkaline batteries—in box
68200	68300	White LEDs w/o alkaline batteries—in box

LUMENS:	67
RUN TIME:	155h

HAZ-LO DIVISION 1 LIGHTING

UL LISTED
Class I, Div. 1, Groups C, D;
Class I, Div 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C

c UL LISTED
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C

MSHA
Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air mixtures only

4AA PROPOLYMER®LUX

This safety-rated light produces a long-reaching, bright beam and features an ergonomic design for comfortable handling. Unbreakable, scratch-resistant lens. IP67- rated; waterproof to 1m for 30 minutes. 1m impact-resistance tested. Corrosion-proof.

4AA PROPOLYMER LUX
BATTERY: 4 "AA" size alkaline
SIZE: 7" x 1.35" x 1.69"
(17.8 x 3.43 x 4.29 cm)
WEIGHT: 7.6 oz (216 g)
COLOR: Yellow or Black

YELLOW	BLACK	
68244	68344	4AA Lux Div. 2 w/alkaline batteries
68602	68702	4AA Lux Div. 1 w/alkaline batteries

Helmet Mount

Gallet Helmet Mount

Rubber Helmet Strap

LUMENS:	100
CANDELA:	4,200
DISTANCE:	130m
RUN TIME:	6h

HAZ-LO DIVISION 1 LIGHTING
C4 LED

4AA Lux Div. 1

UL LISTED
Class I & II, Div. 1, Groups C, D, F & G;
Class I, Div. 2, Groups A, B, C, D;
Class III, T4

c UL LISTED
Class I & II, Div. 1, Groups C, D, F & G;
Class III, T4 Exia
Non-incendive:
Class I, Div. 2, Groups A, B, C, D

MSHA
Permissible Flashlight
App. No. 20-A060002-0
Tested for use in methane-air mixtures only

4AA Lux Div. 2

UL LISTED
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)

c UL LISTED
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T3C (142 C)

NFPA
Meets requirements of
NFPA 1971-8.6 (2007);
500° heat restinance test

4AA PROPOLYMAX®

This super-bright light stands up to the toughest environments. It produces a tight beam with optimum peripheral illumination. Sealed switch design protects it from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. Features TEN-TAP® Programming, allowing user to select the order in which light modes come on.

IP67-rated for dust-tight and waterproof to 1m for 30 minutes. IPX4 for water spray. Non conductive; corrosion-proof.

4AA PROPOLYMAX
BATTERY: 4 "AA" alkaline
SIZE: 7" x 1.05" x 1.5"
(17.78 x 2.67 x 3.81 cm)
WEIGHT: 8.2 oz (233 g)
COLOR: Yellow, Black or Orange

68820	with alkaline batteries - Yellow
68821	with alkaline batteries - Black
68822	with alkaline batteries - Orange

UL LISTED
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4

c UL LISTED
Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F&G;
Class III, T4

	HIGH	LOW
LUMENS:	300	50
CANDELA:	17,000	2,500
DISTANCE:	261m	100m
RUN TIME:	2h 45m	24h

Strobe runs 6 hours

C4 LED®

TEN-TAP® programmable switch allows user selection of one of three different programs:
• high/low/strobe (factory default)
• high only
• low/high

Poly Mount Kit

Belt Clip

3AA PROPOLYMER® HAZ-LO®

Intrinsically safe flashlight for use in hazardous locations. It produces a tight beam with optimum peripheral illumination. Resistant to chemicals and solvents. A combination of visual and mechanical polarity protection ensures correct installation of batteries. Consistent performance throughout battery life. Unbreakable, scratch-resistant lens. IP67 rated for dust-tight and waterproof to 1m for 30 minutes; IPX4 for water spray.

3AA PROPOLYMER HAZ-LO
BATTERY: 3 "AA" alkaline
SIZE: 7.0" x 1.05" x 1.50"
(17.78 x 2.67 x 3.81 cm)
WEIGHT: 7.5 oz (213 g)
COLOR: Yellow, Black or Orange

YELLOW	BLACK	ORANGE	
68720	68721	68722	HAZ-LO with alkaline batteries - Clam
68723	68724	–	HAZ-LO with alkaline batteries - Box
68270	–	–	Helmet Lighting Kit- 3AA ProPolymer HAZ-LO (yellow), alkaline batteries, helmet mount, rubber helmet strap

LUMENS:	120
CANDELA:	14,000
DISTANCE:	237m
RUN TIME:	6h 30m

C4 LED®

HAZ-LO DIVISION 1 LIGHTING®

c UL us CLASSIFIED 5UA4
Class I, Div 1, Groups A, B, C, D;
Class II, Div. 1, Groups E, F, G;
Class III, T4 Exia

MSHA
Permissible Flashlight. Approval No. 20-A140003-0 — Tested for Intrinsic Safety in Methane-Air mixtures only.

3C PROPOLYMER® HAZ-LO®

An intrinsically safe, high-performance flashlight for hazardous locations. Produces a smooth, uniform beam with optimum peripheral illumination. Virtually indestructible body; resistant to chemicals and solvents. Sealed switch protected from corrosion caused by battery leakage. Unbreakable, scratch-resistant lens. 3m impact-resistance tested. IP67-rated for dust-tight and waterproof to 1m for 30 minutes. IPX4 for water spray. Anti-static and non-conductive.

3C PROPOLYMER HAZ-LO
BATTERY: 3 "C" size alkaline
SIZE: 9.3" x 1.46" x 2.08"
(23.62 x 3.71 x 5.28 cm)
WEIGHT: 13.9 oz (394 g)
COLOR: Yellow or Orange

33820	3C ProPolymer HAZ-LO - Yellow
33822	3C ProPolymer HAZ-LO - Orange

LUMENS: 150
CANDELA: 7,000
DISTANCE: 167m
RUN TIME: 18h

Class I, Div 1, Groups A, B, C, D T4; Class II, Div. 1, Groups E, F, G; Class III, T4 Exia

Permissible Flashlight. Approval No. 20-A130003-0 — Tested for Intrinsic Safety in Methane-Air mixtures only.

3C PROPOLYMER® LED

Ten ultra-bright LEDs provide lots of bright white light and an extended run time – up to 336 hours! Safety-rated for use in hazardous locations. Unbreakable, scratch-resistant lens. Waterproof.

3C PROPOLYMER LED
BATTERY: 3 "C" size alkaline
SIZE: 8.55" x 1.95" x 1.48"
(21.72 x 4.95 x 3.76 cm)
WEIGHT: 13.5 oz (382.73 g)
COLOR: Yellow or Black

33202	White LEDs w/o alkaline batteries—Yellow
33302	White LEDs w/o alkaline batteries—Black

LUMENS: 85
RUN TIME: 336h

Permissible Flashlight App. No. 10C-658-0 Tested for use in methane-air mixtures only

Class I, Div. 1, Group D; Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C

Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F&G; Class III, T3C

2AA PROPOLYMER® HAZ-LO®

This virtually indestructible safety-rated flashlight is big on brightness and long on run time, but small enough to fit in a pocket or even strap onto a helmet. It provides a focused beam with optimum peripheral illumination. IPX7-rated, waterproof to 1m for 30 minutes. 1m impact-resistance tested.

2AA PROPOLYMER HAZ-LO
BATTERY: 2 "AA" size alkaline
SIZE: 6.4" x 1.32" x .89"
(16.26 x 3.35 x 2.26 cm)
WEIGHT: 3.6 oz (100 g)
COLOR: Yellow or Black

67101	2AA HAZ-LO with alkaline batteries—Yellow
67100	2AA HAZ-LO with alkaline batteries—Black

Rubber Helmet Strap

LUMENS: 65
CANDELA: 2,300
DISTANCE: 96m
RUN TIME: 24h

Class I, II, Division 1, Groups A, B, C, D, E, F, G; Class III; T-Class: T4
(approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)

Permissible Flashlight. Approval No. 20-A140002-0. Tested for Intrinsic Safety in Methane-Air mixtures only. (approved for use with Energizer E91, Duracell MN1500 and Rayovac NO.815)

WITHSTAND CONSTANT PUNISHMENT.

POLYTAC®

Rugged housing, extreme brightness and extended run times make this ideal for a broad range of lighting applications at the best value. Superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® Programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1m for 30 minutes. Maximum light output throughout battery life.

POLYTAC
BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.34" x 1.36" x 1"
(13.56 x 3.54 x 2.54 cm)
WEIGHT: 4.1 oz (116 g)
COLOR: Black, Coyote or Yellow

NFPA
Meets requirements of
NFPA 1971-8.6 (2007)

88850	with lithium batteries—Black
88851	with lithium batteries—Coyote
88853	with lithium batteries—Yellow
88854	Helmet Lighting Kit—includes yellow PolyTac, rubber helmet strap, helmet mount and lithium batteres

TRADITION SERIES

	HIGH	LOW
LUMENS:	275	14
CANDELA:	9,500	500
DISTANCE:	195m	45m
RUN TIME:	3h	65h

Strobe runs 5.5 hours

C4 LED®

With ((STROBE))
Double tap switch to activate.

Helmet Lighting Kit

POLYTAC® HP

Super-bright with a long-range beam – ideal for lighting the way to the end of a dark alley, down a wooded path, inspecting utility lines from the ground, or search and rescue missions. Virtually indestructible housing. Features a superior grip texture for a comfortable/slip-resistant feel. TEN-TAP® Programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1m for 30 minutes. Maximum light output throughout battery life.

POLYTAC HP
BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.90" x 1.68" x 1"
(14.35 x 4.26 x 2.54 cm)
WEIGHT: 5.2 oz (148 g)
COLOR: Black, Coyote or Yellow

88860	with lithium batteries—Black
88861	with lithium batteries—Coyote
88863	with lithium batteries—Yellow

HP SERIES

	HIGH	LOW
LUMENS:	275	14
CANDELA:	19,000	1,000
DISTANCE:	275m	63m
RUN TIME:	3h	56h

Strobe runs 5.5 hours

C4 LED®

With ((STROBE))
Double tap switch to activate.

Accessory	Part #	Goes With
Helmet Mount	68085	3AA ProPolymer HAZ-LO, 4AA ProPolymer Series, 4AA ProPolyMax, PolyTac, PolyTac HP
Gallet Mount	68066	3AA ProPolymer HAZ-LO, 4AA ProPolymer Series, 4AA ProPolyMax
PolyMount Kit	68089	2AA ProPolymer LED, 3AA ProPolymer HAZ-LO, 4AA ProPolymer Series, 4AA ProPolyMax, PolyTac, PolyTac HP
Rubber Helmet Band	99075	2AA ProPolymer LED, 3AA ProPolymer HAZ-LO, 4AA ProPolymer Series, 4AA ProPolyMax
Belt Clip	68088	3AA ProPolymer HAZ-LO, 4AA ProPolyMax
Lanyard with Push-button Slide	72024	2AA ProPolymer LED, 3AA ProPolymer HAZ-LO, 4AA ProPolymer Series, 4AA ProPolyMax, 3C ProPolymer Series
Yellow Safety Wand Red Safety Wand Blue Safety Wand White Safety Wand Glow-in-the-Dark Safety Wand	75904 75903 75902 75908 75913	4AA ProPolymer LED, 4AA ProPolymer Lux
Yellow Safety Wand Red Safety Wand Glow-in-the-Dark Safety Wand	74904 74903 74913	2AA ProPolymer LED
Red Safety Wand White Safety Wand	33903 33908	3C ProPolymer LED, 3C ProPolymer HAZ-LO
Nylon Holster	25090	3C ProPolymer LED, 3C ProPolymer HAZ-LO
Nylon Holster	68905	4AA ProPolymer Series, 4AA ProPolyMax, PolyTac HP
Nylon Holster	85905	2AA ProPolymer LED, PolyTac
CR123A Lithium Batteries - 2pk CR123A Lithium Batteries - 6pk CR123A Lithium Batteries - 12pk CR123A Lithium Batteries - 400pk	85175 85180 85177 85179	PolyTac, PolyTac HP

HANDS-FREE
LIGHTING SPECIALISTS
BECAUSE WORK IS TOUGH ENOUGH WITHOUT HAVING TO WORRY ABOUT YOUR LIGHTING.

STREAMLIGHT TASK-SPECIFIC TECHNOLOGY:
CHOOSE THE LIGHT INTENSITY ALLOWING YOU TO
## CHOOSE THE RIGHT LIGHT FOR THE JOB.

USE THIS EASY COMPARISON CHART TO CHOOSE THE BEST LIGHT BASED ON THE FEATURES THAT YOU NEED!

BEAM STYLE

SPECS

HIGH MODE PERFORMANCE SHOWN. FOR FULL DETAILS REFER TO THE FOLLOWING PRODUCT PAGES.

DOUBLE CLUTCH™ USB

SPOT OR FLOOD

OUTPUT: 125 lumens
INTENSITY: 1,700 candela
BEAM DISTANCE: 82 meters
RUN TIME: 3 hours 30 min
SIZE: 1.75" x 2.50" x 1.66"
(4.44 x 6.35 x 4.22 cm)
WEIGHT: 4.0 oz (113 g)
COLOR: Yellow or Black

PROTAC HL® HEADLAMP

OUTPUT: 635 lumens
INTENSITY: 8,500 candela
BEAM DISTANCE: 184 meters
RUN TIME: 1 hour 45 min
SIZE: 3.66" x 1.2" x 2.6"
(9.29 x 3.05 x 6.60 cm)
WEIGHT: 6.6 oz (187 g)
COLOR: Black

SEPTOR®

OUTPUT: 120 lumens
INTENSITY: 900 candela
BEAM DISTANCE: 60 meters
RUN TIME: 3 hours 30 min
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.5 oz (156 g)
COLOR: Yellow

ARGO®

OUTPUT: 150 lumens
INTENSITY: 9,250 candela
BEAM DISTANCE: 190 meters
RUN TIME: 3 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.4 oz (153 g)
COLOR: Yellow

TRIDENT®

OUTPUT: 80 lumens
INTENSITY: 4,000 candela
BEAM DISTANCE: 126 meters
RUN TIME: 5 hours
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.50 oz (156 g)
COLOR: Yellow

THE DOUBLE CLUTCH.
SPOT TO FLOOD
IN ONE EASY SHIFT.

DOUBLE CLUTCH™ USB HEADLAMP

STREAMLIGHT TECHNOLOGY:
DECADES OF ILLUMINATION INNOVATION.

SHIFT BEAMS //

OFF

SPOT — DOUBLE-TAP HI-LO — FLOOD

• SHIFTS EASILY TO SPOT OR FLOOD
• MODES WITH THE TURN OF THE WRIST
• GLOVE-FRIENDLY FACECAP ROTATION

SHIFT BATTERIES //

• USB RECHARGEABLE LITHIUM POLYMER OR "AAA" BATTERIES

SHIFT BRIGHTNESS //

• DOUBLE SHIFT FOR HIGH TO LOW IN SPOT OR FLOOD MODES
• 125 LUMENS ON HIGH, 30 LUMENS ON LOW

LITHIUM POLYMER	HIGH	LOW		ALKALINE "AAA"	HIGH	LOW
LUMENS:	125	30		LUMENS:	125	30
SPOT DIST:	82m	40m		SPOT DIST:	82m	40m
SPOT CANDELA:	1,700	400		SPOT CANDELA:	1,700	400
FLOOD DIST:	31m	4m		FLOOD DIST:	31m	4m
FLOOD CANDELA:	250	70		FLOOD CANDELA:	250	70
RUN TIME:	3h 30m	10h		RUN TIME:	6h	18h

This dual-power, dual-function, dual-output headlamp gives you the flexibility of using either a USB-rechargeable battery or 3 AAA alkaline batteries. Choose either a spot or a flood beam, both with high and low mode. It's lightweight and long-running with a 60º tilting head. Unbreakable lens. IPX4-water-resistant. 2m impact resistance tested.

DOUBLE CLUTCH USB
BATTERY: Rechargeable lithium polymer pack or (3) "AAA" alkaline or lithium batteries
SIZE: 1.75" x 2.50" x 1.66" (4.44 x 6.35 x 4.22 cm)
WEIGHT: 4.0 oz (113 g)
COLOR: Yellow or Black

61602	120V AC with elastic and rubber straps—Yellow
61603	120V AC with elastic and rubber straps—Black
61607	with alkaline batteries, elastic and rubber straps—Yellow
61608	with alkaline batteries, elastic and rubber straps—Black

	HIGH	MEDIUM	LOW
LUMENS:	635	206	20
CANDELA:	8,500	1,450	280
DISTANCE:	184m	76m	33m
RUN TIME:	1h 45m	8h	36h

LUMENS:	120
CANDELA:	6,800
DISTANCE:	165m
RUN TIME:	11h

HL SERIES

The perfect lighting tool for when your task requires both hands and a bright light with a wide, long-range beam. 90° tilting head reduces neck fatigue. TEN-TAP® programming lets you choose the order of operating modes (high, medium, low). IPX4-rated for water resistance. 1m impact-resistance tested. Maximum light output throughout battery life.

PROTAC HL HEADLAMP
BATTERY: (2) 3V "CR123A" lithium
SIZE: 3.66" x 1.2" x 2.6"
(9.30 x 3.05 x 6.60 cm)
WEIGHT: 6.6 oz (187 g)
COLOR: Black

61304   with lithium batteries and elastic and rubber straps—Black

This compact, long-running, high-performance headlamp meets the stringent requirements of Div. 1 hazardous locations. Exceptional light output. Long run time. Unbreakable, O-ring sealed lens. Easy operation even when wearing heavy gloves. Impact-resistant housing – 1m drop-test verified. Intrinsically safe.

3AA HAZ-LO
BATTERY: (3) "AA" alkaline
SIZE: 1.88" x 2.5" x 3.08"
(4.76 x 6.35 x 7.82 cm)
WEIGHT: 7.1 oz (202 g)
COLOR: Yellow

61200   with alkaline batteries—rubber and elastic straps—Yellow

Class I, II Div. 1, Groups ABCDEFG
Class III, T4A "Classified"

Class I, Div. 1, Groups A, B, C, D, T4;
Class II, Div. 1, Groups E, F, G,
Class III, T4 "Exia"

Permissible Portable Headlamp Assembly
App. No. 20-A070001-01
Tested for use in methane-air mixtures only

STREAMLIGHT HAZ-LO® SERIES: // WHAT IS "INTRINSICALLY SAFE?"

Streamlight offers a variety of lights that are safety-rated for hazardous environments. We even have several lights that are "intrinsically safe"—these are lights that have been tested to ANSI/U.L.- Std-913 and found to be safe for use in a Division 1 classified environment.

While an intrinsically safe light would have a Class I, Div. 1 rating, it's important to know that not every product with a Class I, Div. 1 rating is intrinsically safe.

STREAMLIGHT HEADLAMPS GIVE YOU THE
VERSATILITY
AND THE BRIGHTNESS
YOU NEED TO ACCOMPLISH
ANY TASK.

SEPTOR®

	HIGH	MED	LOW
LUMENS:	120	45	13
CANDELA:	900	375	100
DISTANCE:	60m	35m	20m
RUN TIME:	3h 30m	10h	55h

Includes a rubber strap that ensures a non-slip grip for hardhats.

For those that often perform tasks at an arm's length or up-close work, a soft flood light may be more appropriate than extreme brightness or reach. The Septor gives you 120 lumens of a soft, wide beam to illuminate your work area.

SEPTOR HEADLAMP
BATTERY: (3) "AAA" alkaline
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.5 oz (156 g)
COLOR: Yellow

SEPTOR HEADLAMP
61052   with alkaline batteries—rubber and elastic straps—Yellow

ETL CLASSIFIED

Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

ARGO®

	HIGH	MED	LOW
LUMENS:	150	100	45
CANDELA:	9,250	6,375	2,750
DISTANCE:	190m	160m	103m
RUN TIME:	3h	4h 30m	30h

Includes a rubber strap that ensures a non-slip grip for hardhats.

C4 LED®

Perfect for illuminating objects at a distance, the long-range capability of the Argo delivers a far-reaching beam of 190 meters.

ARGO HEADLAMP
BATTERY: (3) "AAA" alkaline
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.4 oz (153 g)
COLOR: Yellow

ARGO HEADLAMP
61301   with alkaline batteries—rubber and elastic straps—Yellow

ETL CLASSIFIED

Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

TRIDENT®

When you need a light that will provide you with the broadest range of lighting applications for everyday use, whether distance or up-close work, the multi-purpose Trident headlamp provides a good mix of both.

TRIDENT HEADLAMP
BATTERY: (3) "AAA" alkaline
SIZE: 1.75" x 2.70" x 2.40"
(4.45 x 6.85 x 6.09 cm)
WEIGHT: 5.50 oz (156 g)
COLOR: Yellow, Green or RealTree® Hardwoods® Green High Definition (HD)

THREE TRIDENT MODELS:

Yellow Model: Contains C4® LED and three ultra-bright white LEDs

Green Model: Contains C4® LED, one safety green LED, two white 5mm LEDs

Buckmasters Camo Model: RealTree® Hardwoods® Green High Definition camo; contains super-bright C4 LED and three safety-green 5mm LEDs

TRIDENT HEADLAMP

61050	3 White LEDs with alkaline batteries—Yellow
61051	2 White and 1 Green LED with alkaline batteries—Green
61070	3 Green LEDs with alkaline batteries—Camo

ETL CLASSIFIED
C ⓔTⓛ US

Class I, Div. 2, Groups A, B, C, D;
Class II, Div. 2, Groups F, G,
Class III, T5

Yellow Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	35	11
CANDELA:	4,000	385	120
DISTANCE:	126m	39m	22m
RUN TIME:	5h	10h	53h

Green Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	25	6
CANDELA:	4,000	275	55
DISTANCE:	126m	33m	15m
RUN TIME:	5h	19h 30m	63h

Camo Model	C4 LED	3 LEDS	1 LED
LUMENS:	80	20	6
CANDELA:	4,000	175	55
DISTANCE:	126m	26m	15m
RUN TIME:	5h	20h	63h

90° tilting head with a durable ratcheting system.

Includes a rubber strap that ensures a non-slip grip for hardhats.

ENDURO®

Features an integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor. Unbreakable lens. O-ring sealed, waterproof to 1m for 1 hour. Impact-resistant housing – drop-test verified. Maximum light output throughout battery life.

ENDURO HEADLAMP
BATTERY: (2) "AAA" alkaline
SIZE: 1.3" x 2.25" x 1.6"
(3.25 x 5.7 x 4 cm)
WEIGHT: 2.75 oz (78.5 g)
COLOR: Black or RealTree® Hardwoods® Green High Definition (HD)

61400	with alkaline batteries—elastic strap and visor clip—Black
61405	with alkaline batteries—elastic strap and visor clip—Camo

Includes integrated rubber/elastic combination head strap and a clip that attaches to the brim of your hat, coat lapel or car visor.

WHITE LED	HIGH	LOW
LUMENS:	14.5	6
CANDELA:	850	–
RUN TIME:	6h	12h

STRION® LED

A powerful value that's perfect for the broadest range of lighting needs. IPX4-rated for water-resistance. 2m impact-resistance tested.

STRION LED
BATTERY: Lithium-ion with on-board safety control circuit
SIZE: 5.9" x 1.25" x .95"
(14.99 x 3.18 x 2.41 cm)
WEIGHT: 5.2 oz (148 g)
COLOR: Pink

74350   with AC/12V DC—1 Holder - Pink

BCRF

For every pink Strion® LED sold, Streamlight will donate $5 to the Breast Cancer Research Foundation.®

With ((STROBE))
Double tap switch to activate.

	HIGH	MEDIUM	LOW
LUMENS:	260	130	65
CANDELA:	10,000	5,000	2,500
DISTANCE:	200m	141m	100m
RUN TIME:	2h	4h	7h 30m

Strobe runs 5.5 hours

The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to achieve prevention and a cure for breast cancer in our lifetime by providing critical funding for innovative clinical and genetic research at leading medical centers worldwide, and increasing public awareness about good breast health. For more information, visit www.bcrfcure.org.

PROTAC HL®

HL SERIES

One of the brightest tactical personal carry lights of its size. Far-reaching beam. TEN-TAP® programming lets you choose the order of operating modes (high, low, strobe). IPX7-rated waterproof to 1m for 30 minutes. 1 meter impact-resistance tested.

PROTAC HL
BATTERY: (2) 3V "CR123A" lithium
SIZE: 5.4" x 1.375" x 1.0"
(13.72 x 3.49 x 2.54 cm)
WEIGHT: 5.6 oz (159 g)
COLOR: Pink

88044   with lithium batteries and holster - Pink

BCRF

For every pink ProTac® HL sold, Streamlight will donate $3 to the Breast Cancer Research Foundation.®

Nylon Holster

With ((STROBE))
Double tap switch to activate.

	HIGH	LOW
LUMENS:	600	33
CANDELA:	16,000	800
DISTANCE:	253m	57m
RUN TIME:	1h 15m	18h

Strobe runs 2.5 hours

VANTAGE®

The solution to firefighters' hands-free lighting needs. Attaches easily to helmets and hard hats, and rotates 360º. Fits snugly against helmet to prevent snags. Includes a bright blue taillight so you can be seen from behind even in heavy smoke. Easy to operate with gloves. Fits both traditional and modern helmets.

VANTAGE
BATTERY: (2) 3V "CR123A" lithium
SIZE: 3.26" x 1.47" x 2.56"
(8.28 x 3.73 x 6.5 cm)
WEIGHT: 5.14 oz (145.7 g)
COLOR: Red

69157   Vantage Helmet Light - Red

Dual direction, easy access on/off switch.

470nm ultra-bright blue taillight LED.

LUMENS:	115
CANDELA:	7,000
DISTANCE:	167m
RUN TIME:	6h

NFPA Meets requirements of NFPA 1971-8.6 (2007); 500° heat resistance test

CE Meets applicable European Community Directives

Congress created the National Fallen Firefighters Foundation® to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.

This tiny, weatherproof light has a non-rotating snap hook for easy one-handed operation when attached to a keychain.

NANO LIGHT
BATTERY: (4) alkaline button cell
SIZE: 1.47" x .51" x .43"
(3.73 x 1.3 x 1.09 cm)
WEIGHT: .36 oz (10 g)
COLOR: Black, Blue, Pink, Red, Orange or Coyote

For each color Nano Light sold, we donate $1 to the organization associated with that light. See below for information about each cause.

LUMENS:	10
RUN TIME:	8h

73001	Black with White LED
73002	COPS/Blue with White LED
73003	BCRF/Pink with White LED
73005	NFFF/Red with White LED
73006	BADF/Orange with White LED
73007	TMF/Coyote with White LED
61205	4 pack coin cell Nano Light Batteries

STREAMLIGHT CARES:
THE PRODUCT THAT ALLOWS YOU TO SUPPORT CAUSES THAT MATTER.

Congress created the National Fallen Firefighters Foundation to lead a nationwide effort to honor America's fallen firefighters. Since 1992, the non-profit foundation has developed and expanded programs that fulfill that mandate. Their mission is to honor and remember America's fallen fire heroes and to provide resources to assist their survivors in rebuilding their lives. For more information, visit www.firehero.org.

By purchasing this product you are helping to make a difference in the rebuilding of the lives of surviving families and affected co-workers of law enforcement officers killed in the line of duty. In addition to rebuilding lives, C.O.P.S. provides training to law enforcement agencies on survivor victimization issues and educates the public of the need to support the law enforcement profession and its survivors. For more information, visit www.nationalcops.org.

The Breast Cancer Research Foundation® is an independent 501 (c) (3) not-for-profit organization whose mission is to achieve prevention and a cure for breast cancer in our lifetime by providing critical funding for innovative clinical and genetic research at leading medical centers worldwide, and increasing public awareness about good breast health. For more information, visit www.bcrfcure.org.

The Buckmasters American Deer Foundation, (BADF), founded by Jackie Bushman was born from the desire to give back to the hunting community, starting with programs such as Project Venison and Hunters of Tomorrow. Buckmasters Chapters from across the country continue to give to those in need. For more information, visit www.buckmasters.com/resources/badf.aspx.

The Travis Manion Foundation honors and assists our nation's veterans, first responders, and the families of fallen heroes through various grants, scholarships, races, and The annual 9/11 Heroes Run. For more information, visit www.travismanion.org.

FOR EVERY CUSTOM NANO LIGHT® SOLD, STREAMLIGHT WILL DONATE $1 TO THEIR RESPECTIVE ORGANIZATION.

STREAMLIGHT

Heroes Trust Streamlight®

PROFESSIONAL-GRADE
ILLUMINATION TOOLS

Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A 19403-3996

www.streamlight.com // www.streamlightgear.com
(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax