


GUARDIAN SERIES

4s17m LEVEL IV STAND ALONE



SHOOTERS CUT

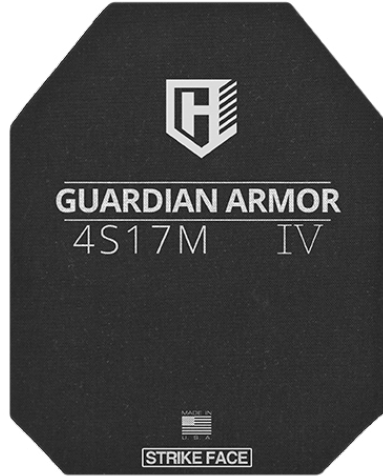

SAPI CUT

FEATURES

- + **Protection:** Level IV Stand Alone Armor Piercing
- + **NIJ Standard 0101.06:** This product has been certified compliant by NIJ
- + **DEA:** Hard Armor Protocol Compliant
- + **RST:** Rifle Special Threats Validated
- + **Material:** Ceramic strike face composite backing
- + **Exterior Cover:** 1000D Cordura®, Textured Nylon
- + **Cut:** The 10" x 12" shooters cut plates are considered nominal and the actual measurement is 9.5" x 11.5"
- + **Thickness:** 0.95"
- + **Warranty:** 10 years on all ballistic material excluding exterior cover and 1 year on exterior cover material and workmanship

SIZE & WEIGHT CHART

SIZE	CURVATURE	CUT	WEIGHT (LBS/KG)
10 x 12	Multi Curve	Shooters	7.2 / 3.3
7.25 x 11.5	Multi Curve	SAPI (XS)	5.5 / 2.5
8.75 x 11.75	Multi Curve	SAPI (S)	7.1 / 3.2
9.5 x 12.5	Multi Curve	SAPI (M)	8.2 / 3.7
10 x 13.25	Multi Curve	SAPI (L)	9.4 / 4.2
11 x 14	Multi Curve	SAPI (XL)	10.3 / 4.7

THREAT CHART

WEAPON TYPE	AMMUNITION	VELOCITY	WEAPON TYPE	AMMUNITION	VELOCITY
Rifle M-1 (NIJ06)	7.62 x 63 mm - AP M2	2880 (ft/s ± 30) or 878 (m/s ± 9)	Rifle M-1	7.62 x 63 mm - JSP	2780 (ft/s ± 30) or 847 (m/s ± 9)
Rifle AK-47, M, SKS	7.62 x 39 mm - API	2380 (ft/s ± 30) or 725 (m/s ± 9)	Rifle SVD, Dragunov	7.62 x 54R -B-32 API	2800 (ft/s ± 30) or 854 (m/s ± 9)
Rifle M-16/AR-15	5.56 x45mm - M855/SS109	3117 (ft/s ± 30) or 950 (m/s ± 9)	Rifle FN FAL	7.62 x 51 mm - M80	2780 (ft/s ± 30) or 847 (m/s ± 9)
Rifle M-16/AR-15	5.56 x45mm - M193	3150 (ft/s ± 30) or 960 (m/s ± 9)	Rifle AK-47, M, SKS	7.62 x 39mm - Mild Steel Core	2380 (ft/s ± 30) or 725 (m/s ± 9)
Rifle SVD, Dragunov	7.62 x 54R-LPS	2840 (ft/s ± 30) or 865 (m/s ± 9)	Rifle AK-47, M, SKS	7.62 x 39 mm - Ball	2380 (ft/s ± 30) or 725 (m/s ± 9)
Rifle SVD, Dragunov	7.62 x 54R-L	2840 (ft/s ± 30) or 865 (m/s ± 9)			

HIGHCOMARMOR.COM

160101.33.Kg - Ver 33.00 | Approved: Nov 13 2018



USA MADE



0101.06 CERTIFIED



MULTI HIT



DEA COMPLIANT

Department of State ITAR / Department of Commerce EAR: This data sheet is for an EXPORT CONTROLLED PRODUCT. The export of these products and technical information related to these products is governed by the U.S. Department of State International Traffic in Arms Regulations (ITAR) and/or the Department of Commerce Export Administration Regulations (EAR). Non-Sales Technical Data related to these products must not be transmitted to a foreign person/entity without proper authorization of the U.S. Government. Violations may result in administrative, civil, or criminal penalties. ITAR/EAR Export Licenses and/or ITAR/EAR Brokering Licenses (as appropriate) will be required prior to submittal of any further technical information and/or shipment of samples and/or products. **DISCLAIMER:** The information contained in this specification is intended solely to provide general guidance. The right is reserved to make changes to this specification without notice at any time. Nothing in this specification (i) constitutes an offer, representation, warranty, term or condition or (ii) is a substitute for the need to employ adequate independent technical expertise and judgment. **COPYRIGHT NOTICE:** Material featured in this specification is subject to copyright protection and may not be used in any product or service, modified, adapted, published, distributed or reproduced without obtaining prior written permission. Any requests for such permission should be made in writing.