PRODUCT FACT SHEET

TWIN-TASK® 2L
LITHIUM BATTERY-POWERED FLASHLIGHT

MARKET APPLICATIONS: Professional Light – Hardware/Tool, Industrial, Law Enforcement, Security, Automotive, Outdoor, Consumer.

DESCRIPTION: The Twin-Task® 2L flashlight features three lighting modes. High, Low and Flood using the latest in LED technology. The C4® power LED with its textured reflector provides an even beam, along with a piercing hotspot for distance. The Flood LED provides smooth even area lighting for your up close tasks with extended run time. Packaged with a high-strength lanyard.

CASE MATERIAL: Machined aluminum case with non-slip knurled grip and a matte black anodized finish.

DIMENSIONS: Length: 5.67 in. (14.40 cm) Major Diameter: 1.33 in. (3.38 cm)
Body Diameter: 0.98 in. (2.49 cm)

WEIGHT: 5.70 oz (162 grams) with CR123 lithium batteries. (included with purchase).

LENS: Glass lens.

LIGHT SOURCE: C4® spot LED technology, impervious to shock with a 50,000 hour lifetime.
Flood LED utilizes "chip on board" technology with a 50,000 hour lifetime.

LIGHT OUTPUT: See chart below for lumens, runtime, distance and intensity of each light source.

ON/OFF: Push button head switch – sequences through C4® spot LED, Spot/Flood, Flood only and Off.

RUN TIME: See chart. All runtimes claims are to 10% of initial lumen output.

BATTERY: Two (2) "CR123A" size lithium batteries.

FEATURES: C4® LED technology for extreme brightness.
IPX4 rated for water resistant operation. All openings o-ring sealed.
1 meter impact resistance tested.

APPROVALS: CE Meets applicable European Community Directives.

WARRANTY: Streamlight's Limited Lifetime Warranty

OPTIONAL ACCESSORIES: N/A

FL1 STANDARD	SPOT	SPOT/FLOOD	FLOOD
OUTPUT	350 LUMENS	230 LUMENS	75 LUMENS
RUNTIME	4h 45min	5h 45min	9h 45min
DISTANCE	140m	102m	15m
INTENSITY	4,900cd	2,580cd	60cd

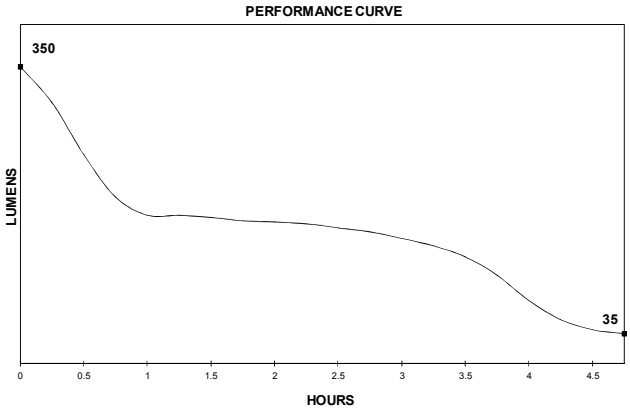

All performance claims to ANSI/PLATO FL1-2016 Standard
Issued: 01/30/2017
Revised: 04/05/2017 **Rev:** 1 **Made In China** **Document #302**