PFP-9HP-DSL

DIESEL POWERED PUMP

This high quality design diesel powered pump. The pump gives over 350 gpm and goes up to 75 psi. Engine and pump are mounted on a protective frame made of steel with shock absorber and folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- Yanmar, model L100, air cooled engine
- Single cylinder, 4-stroke diesel engine
- 12V electric start with recoil start as backup
- 1.45 gallon (5.5 l) integrated fuel tank

PUMP UNIT SPECIFICATIONS

- Direct drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal.
- Stainless steel pump shaft
- Exhaust priming system, guaranteed up to 20' (6 meter lift)
- One 2 ½" (65 mm) delivery outlet with ¼ turn ball valve
- One 3" (77 mm) suction inlet
- Dimensions: Length: 25 ½" (648 mm);
 Width: 20 ½" (520 mm); Height: 23 ¾" (604 mm)
- Weight: 195.8 lbs (89 Kg)

INCLUDED ACCESSORIES

- Swivel spotlight
- 100 watts alternator
- Pressure gauge
- Vernier throttle
- 12-V battery


V battery • 2 YE

PERFORMANCE

 MAX FLOW: 350 GPM
 240 GPM @ 25 PSI

 MAX PRESSURE: 75 PSI
 130 GPM @ 50 PSI

325 GPM @ 10 PSI

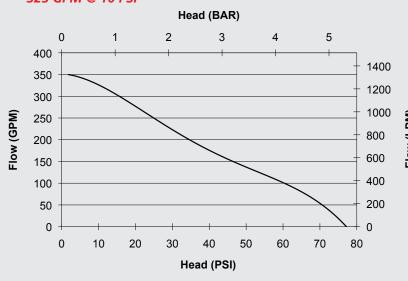

LIMITED WARRANTY

2 YEARS





A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90, Pierreville (Québec) Canada JOG 1J0 Phone: 1-800-567-2719

Phone : 1-800-567-2719 Fax : 1-800-434-2613 www.fire-pumps.com